


环保物料



此外壳为对称件，
工艺缺口可以在上，
或者在下

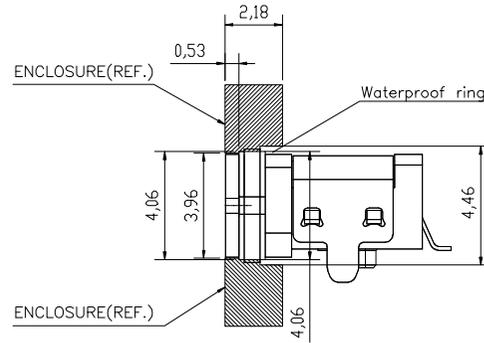

NOTES:



SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- VOLTAGE: 30 VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY: 10,000 CYCLES
- WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7(1.5M 30min).
(防水等级IPX7 1.5米深 30分钟)


UC-F A381 S R -E B 9 A 0 01

1 2 3 4 5 6 7 8 9 10 11


- USB TYPE C
- F:FEMALE M:MALE
- A381=板上高度3.81mm
- S:SMT
- R:90°
- 端子材质: E:C7025
- 端子PIN数: B:16PIN
- 胶芯材质: 9:PA9T
- 胶芯颜色: A: 黑色
- 流水码: 0 :防水
- Contact Area plating on contacts
01: Au 1u"

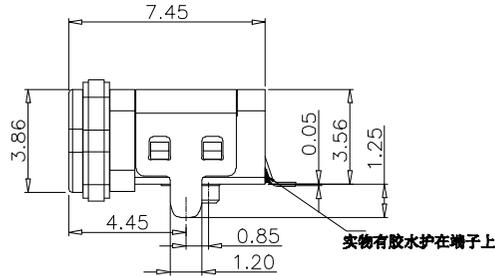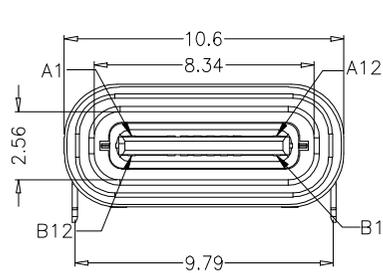


此处点胶



实物有胶水护在端子上

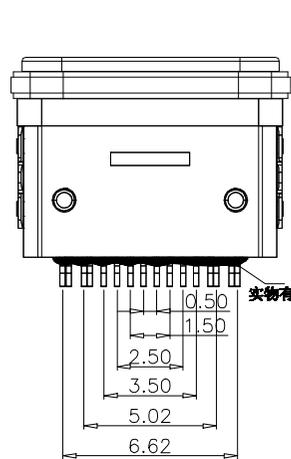

实物有胶水护在端子上

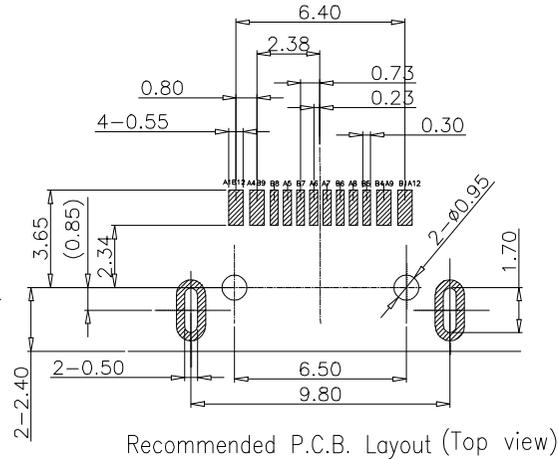

Recommended P.C.B. Layout (Top view)
Unspecified tolerance: ±0.05

USB TYPE-C PIN ASSIGNMENTS

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL & CONNECTORS
A0	新图面发行	21.05.07		L INEAR	1:1	APPROVED	Micky Ma	UC-FA381SR-EB9A001	ENDE05	
A1	图框升级	22.12.23		ANGLES	X° REF ±6°					
A2	依实物更新图纸	23.04.17	UNIT: MM	0.00 ± 0.25	X° ± 3°	DESIGNER	23.04.17	TYPE-C 16P 贴板全塑防水	REV	
			SIZE: A4	0.000 ± 0.10	X° X' ± 2°	DRAWN				A2

1

2

3

4


5

6

7

8

环保物料

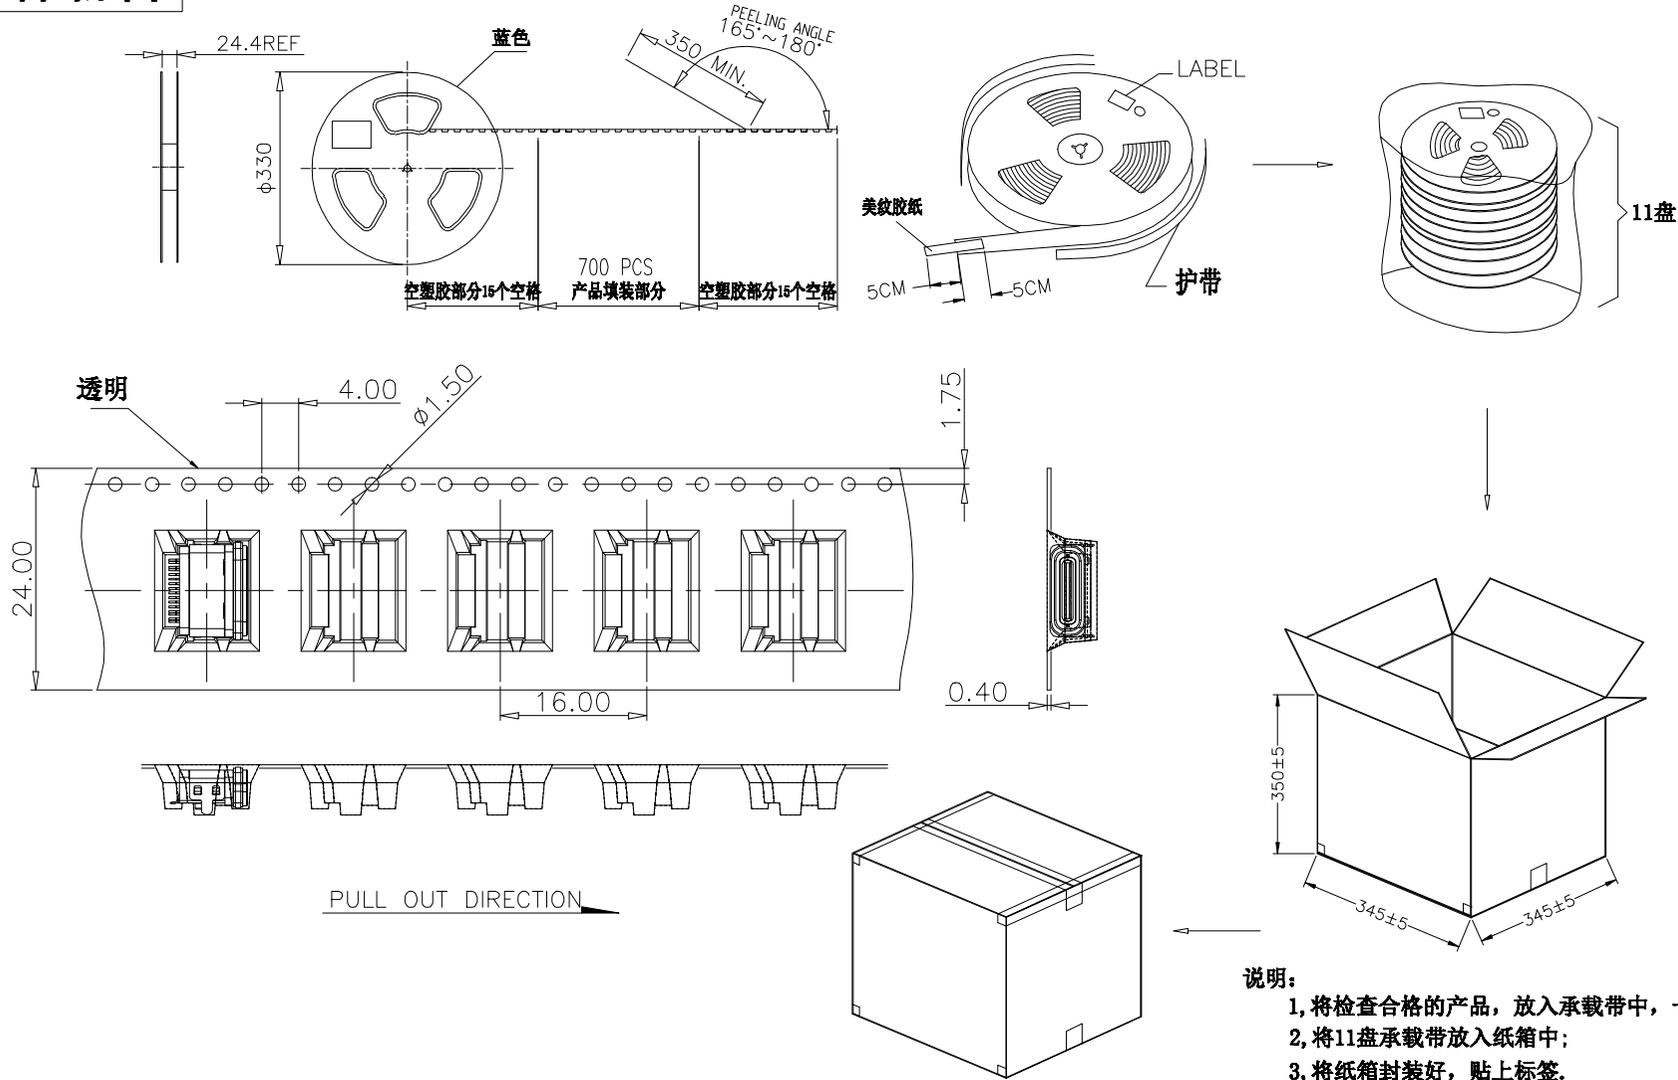

说明：
 1, 将检查合格的产品，放入承载带中，一盘包装700PCS；
 2, 将11盘承载带放入纸箱中；
 3, 将纸箱封装好，贴上标签。

每箱数量	净重(Kg)	毛重(Kg)
7700PCS	xxx	xxx

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.
A0	新图面发行	21.05.07		L INEAR	ANGLES	1:1				
A1	换图框发行	22.12.23		0.0±0.30	X° REF±6°	APPROVED	Micky Ma	23.04.21	UC-FA381SR-EB9A001	ENDE05
A2	更新包装数量	23.04.21		0.00±0.25	X° ±3°	DESIGNER				
				0.000±0.10	X° X' ±2°	DRAWN				
			UNIT: MM						TITLE	
			SIZE: A4						TYPE-C 16P 贴板全塑防水	

JCTC®
 TERMINAL & CONNECTORS

REV	A2	SHEET	1/1
-----	----	-------	-----