

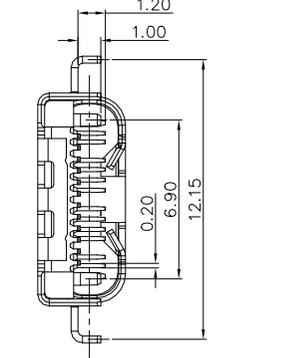
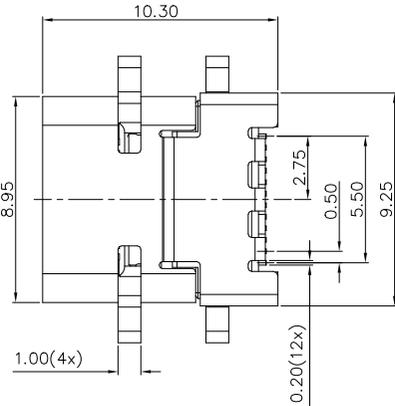
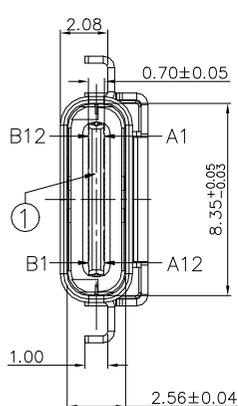
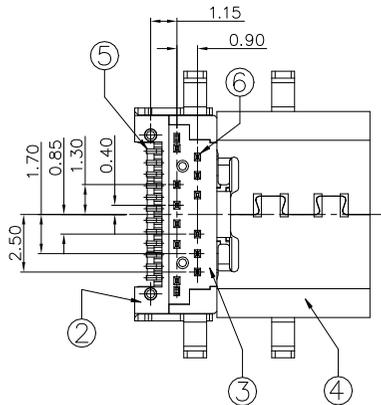



环保物料

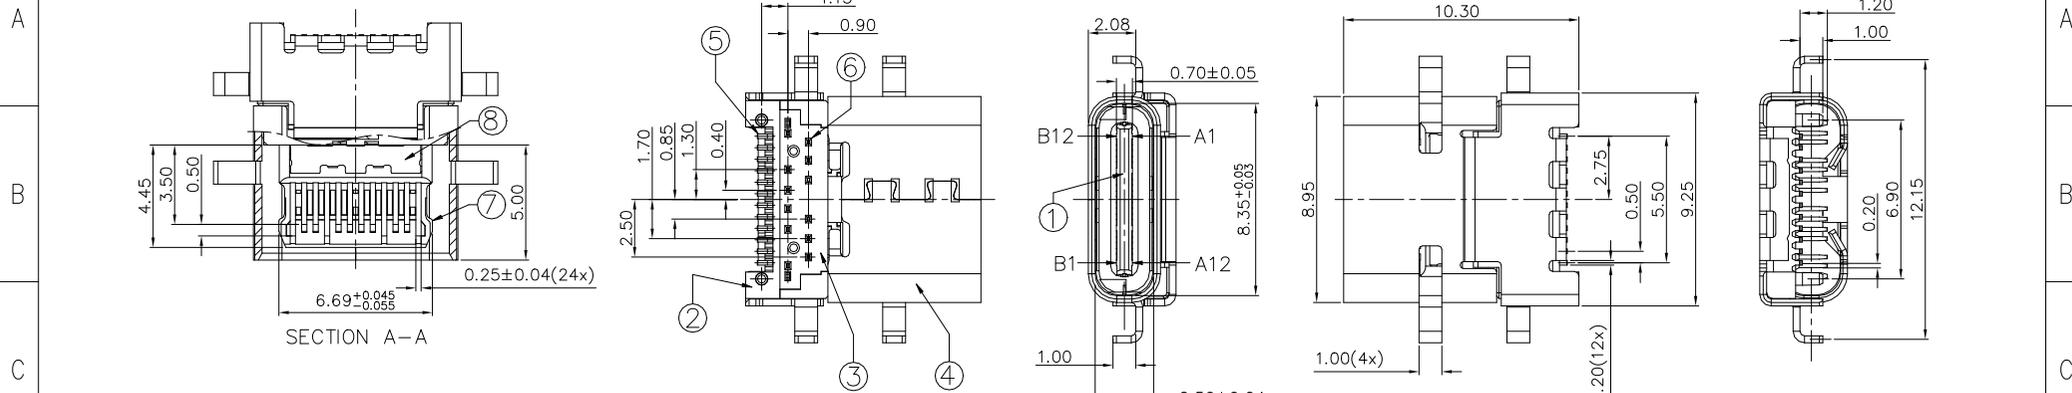

UC-F C050 R R -A C L A 0 01

1 2 3 4 5 6 7 8 9 10 11

- 1.USB TYPE C
- 2.F: FEMALE
- 3.C050= 沉板中心高0.50mm
- 4.R: SMT+DIP
- 5.R: 90°
- 6.端子材质: A: C2680
- 7.端子PIN数: C: 24PIN
- 8: 胶芯材质: L: LCP
- 9: 胶芯颜色: A: 黑色
- 10: 流水码: 0
- 11.Contact Area plating on contacts
- 01: G/F

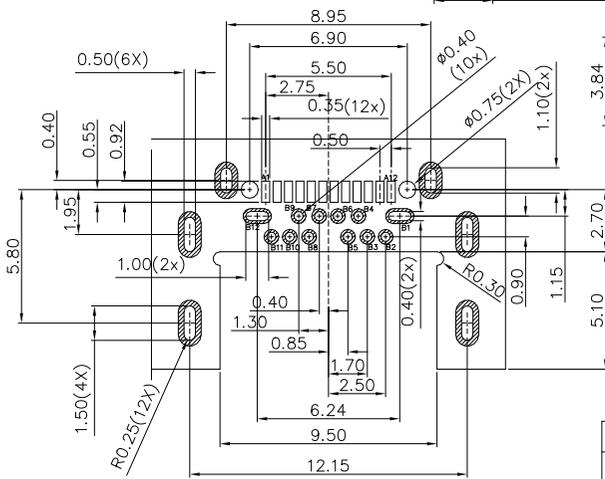

PCB LAYOUT (RECOMMENDED)
NOTE: GENERAL TOLERANCE: ±0.05mm

NOTE:
1.ELECTRICAL PERFORMANCE:
CURRENT RATING: 5A ON VBUS/
1.25A ON VCONN/0.25A ON OTHERS
INSULATION RESISTANCE: 100MΩ MIN;
DIELECTRIC VOLTAGE: 100 VAC/MINUTE;
CONTACT RESISTANCE: 40mΩ MAX FOR INITIAL;
2.MECHANICAL PERFORMANCE:
INSERTION FORCE: 5~20N
EXTRACTION FORCE: 8~20N
DURABILITY: 10,000 TIMES




Item	Title	Material	Dispose	Q'TY
1	Insemold housing	LCP	Black	1PCS
2	Insemold-Top Contact	LCP	Black	1PCS
3	Insemold-Bottom Contact	LCP	Black	1PCS
4	Shell	SUS304	Ni: 30u" Min.	1PCS
5	Top Contact	C2680	Mating Area: See P/N	12PCS
6	Bottom Contact	C2680	Solder Tails: Ni:50u"Min,Sn80u"Min.	12PCS
7	Mid-Plate	SUS301	Ni: 30u"Min,Sn80u"Min.	1PCS
8	EMC pad	SUS304		2PCS

PIN	Signal Name	PIN	Signal Name
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	
A0	新图面发行	22.06.22	LINER	1:1			UC-FC050RR-ACLA001	ENDE05	
			ANGLES	APPROVED			TITLE USB Type-C 母座24pin 沉板式 DIP+SMT焊脚	REV	
			0.0±0.30	DESIGNER					AO
			0.00±0.20	DRAWN	CGY	22.06.22			SHEET
			UNIT: MM					1/1	
			SIZE: A4						



环保物料

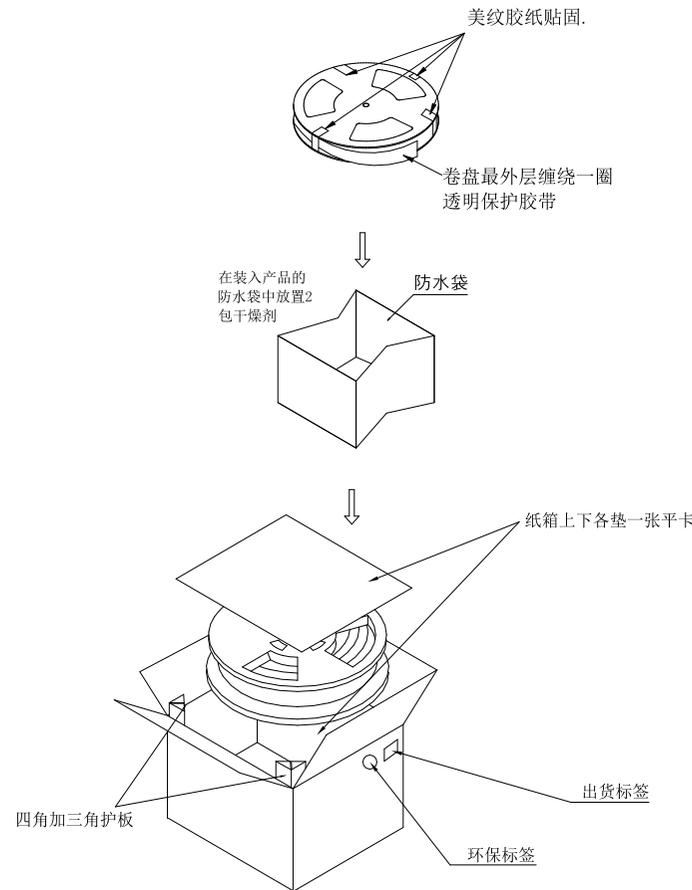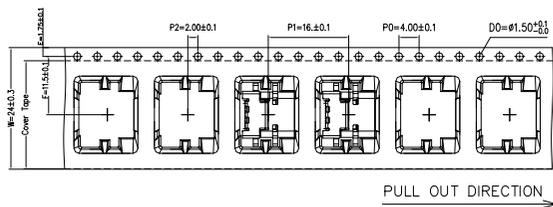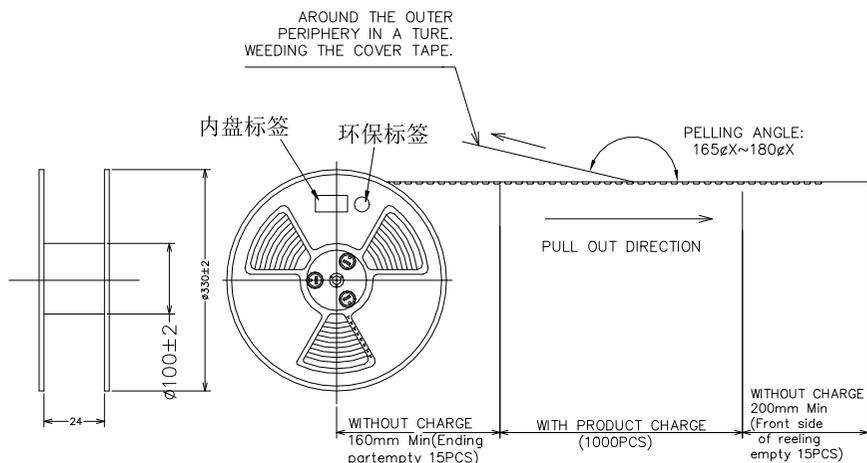

包装规范说明:

1. 如图所示首先CARRIER TAPE (载带) 需先预留15PCS空格后方可置入成品,并附COVER TPAE(上带)覆盖于上,再配合带装机自动卷绕于REEL(塑胶卷轴)收料。
As shown from picture, the initial starting carrier need to be emptied for 15 pcs, then put connector on Inth carrier; Then cover it with Cover Tape, and Reeling it with Reel auto machine.
2. 在定量包装完成后,前端CARRIER TAPE亦需预留15PCS空格,而COVER TPAE配合CARRIER TYPE长度覆盖后,并须再超出200mm以上,最后以胶纸贴固,并于REEL盘上方贴合格标签1张。
In the end of the Reel, need to empty 15 pcs carrier tape; After covering the carrier, then the Cover Tape need to be 200mm longer, and use tape to fix the cover tape to the reel. Put "Qualified label" on the Reel.
3. 在纸箱内左右,前后侧各放入一块三角卡板,每个PE袋中装入5个REEL盘,并在PE袋中放入2PCS干燥剂,用胶布封好,在每个纸箱内装入10PCS卷盘,共2叠.纸箱内上下各垫一张平卡, 盖上箱盖后以胶布封箱,于侧位置贴出货标签一张. Inside of carton, at left and right side, put triangle fixed card; Put 5 Reels to PE bag, and put 1 bags of desiccant inside the PE bag. Each carton has 10 reels. Put "Delivery label" on side of the carton.

产品规格		Product spec.	/
包装容量	个/卷	Pcs/Reel	1000
	卷/箱	Reel/Clos.	10
QTY	个/箱	Pcs/Clos.	10000
重量	净重	N. W.	/kg
	毛重	G. W.	/kg

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
AO	新图面发行	22.06.22		LINEAR	1:1			UC-FC050RR-ACLA001	ENDE05				
				ANGLES	APPROVED								
			UNIT: MM	0.00±0.25	X° REF±6°	DESIGNER		TITLE	USB Type-C 母座24pin 沉板式 DIP+SMT焊脚				
			SIZE: A4	0.000±0.10	X° X' ±2°	DRAWN	CHX			22.06.22	REV	AO	SHEET