


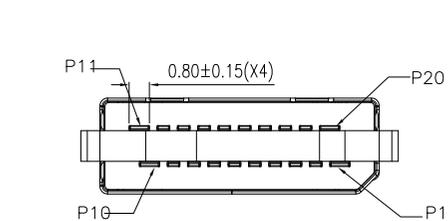
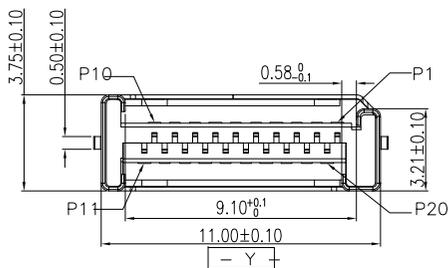
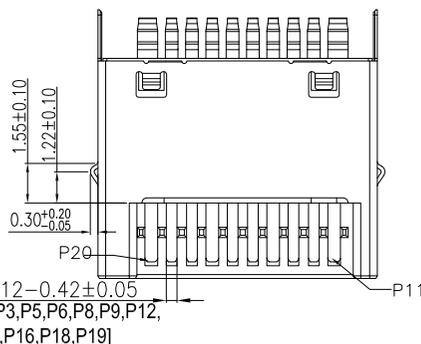



环保物料

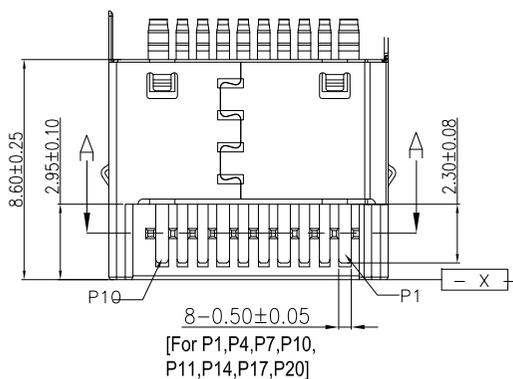

PCB板焊点与产品PIN位连接示意

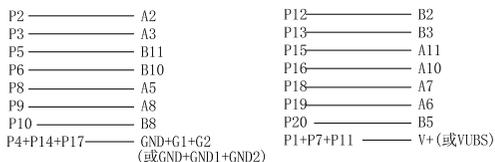

Key-A 20-Pin Plug to One Type-C Port										
Pin No.	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10
Signal Name	VBUS	TX1+	TX1-	GND	RX1+	RX1-	VBUS	CC1	SBU1	SBU2
Signal Name	CC2	D+	D-	GND	RX2-	RX2+	GND	TX2-	TX2+	VBUS
Pin No.	P20	P19	P18	P17	P16	P15	P14	P13	P12	P11

Key-A 20-Pin Plug to One Standard-A Port										
Pin No.	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10
Signal Name	VBUS	TX1+	TX1-	GND	RX1+	RX1-	VBUS	CC1		
Signal Name		D+	D-	GND			GND			VBUS
Pin No.	P20	P19	P18	P17	P16	P15	P14	P13	P12	P11

NOTES:

- MATERIALS:
SHELL: STAINLESS STEEL;
HOUSING: LCP, UL94-V0, BLACK;
CONTACT: C2680;
- PLATING:
CONTACT: 50~100u". NICKEL UNDERPLATING OVERALL;
PLATED GOLD 3u". ON CONTACT AREA,
OR REFERENCE PART NO. CODE;
PLATED MATTE Sn 60~150u. ON SOLDER AREA;
SHELL: PLATED NICKEL;
- DIMENSIONAL TOLERANCE:
NOT SPECIFIED TOLERANCE, COMPLIED TO THE GENERAL TOLERANCE;
CONTROL DIMENSIONS INDICATED FORM "▼", MUST BE INSPECTED BY QC;
- ELECTRICAL CHARACTERISTICS:
LOW LEVEL CONTACT RESISTANCE: 40mΩ Max.;
INSULATION RESISTANCE: 100MΩ Min.;
DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC;
CONTACT CURRENT RATING: 3A Max;
- MECHANICAL CHARACTERISTICS:
INSERTION FORCE: 35N MAX;
EXTRACTION FORCE: 15N MIN;
DURABILITY: 50 CYCLES;
- IR REFLOW CONDITION PEAK TEMPERATURE: 260°C-10S

UC-M D000 S V-A E L A 0 03
1 2 3 4 5 6 7 8 9 10 11


- USB TYPE C
- M: MALE
- D000= 夹板式 (不带板)
- S: SMT
- V: 180°
- 端子材质: A: C2680
- 端子PIN数: E: 20PIN
- 胶芯材质: L: LCP
- 胶芯颜色: A: 黑色
- 流水码: 0
- Contact Area plating on contacts
03: Au 3u"

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE 1:1	NAME	DATE	PART NO.	DWG NO.				
A0	新图面发行	20.03.15	LINEAR	APPROVED			UC-MD000SV-AELA003	ENDE05				
A1	更换图框	23.03.08	0.0±0.30	DESIGNER			TITLE					
			0.00±0.20	DRAWN	Xiao	23.08.03	TYPE E DESKTOP 2x10 公头 A型		REV	A1	SHEET	1/1

环保物料

NOTES:


1. 包装数量: 8KPCS箱/80盘; 当订单量和尾数不足8KPCS时可以合理选择纸箱规格。
2. 每箱放2袋干燥剂+1PCS PE袋 750*450mm;
3. 外箱规格: 375*295*280CM;
TRAY盘规格: 260*200*10.6MM

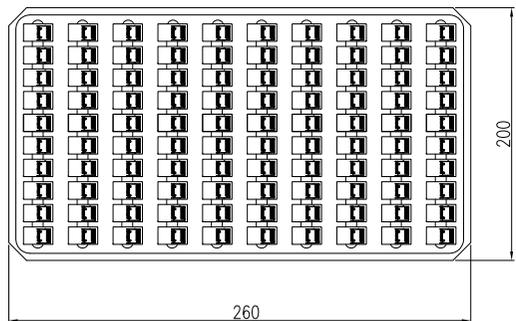


正唛头



侧唛头



5	PE袋	1	PCS
4	出货标签	1	PCS
3	外纸箱	1	PCS
2	干燥剂	2	PCS
1	TRAY盘	100	SET
序号	包装名称	数量	单位

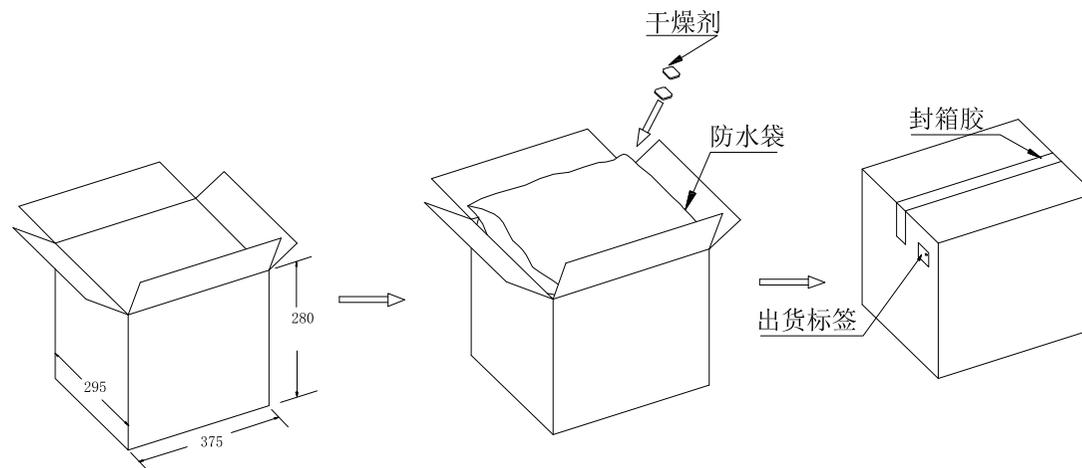

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.			
A0	新图面发行	20.03.15		LINEAR	ANGLES	APPROVED			UC-MD000SV-AELA003	ENDE05			
A1	更换图框	23.03.08	0.00±0.20	X° REF±6°	DESIGNER			TITLE					
			0.00±0.10	X° X'±2°	DRAWN	Xiao	23.08.03	TYPE E DESKTOP 2x10 公头 A型					
			SIZE: A4							REV	A1	SHEET	1/1