
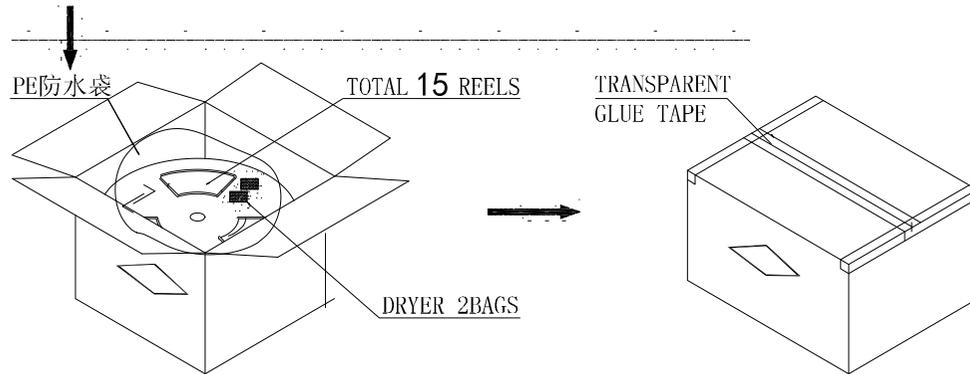
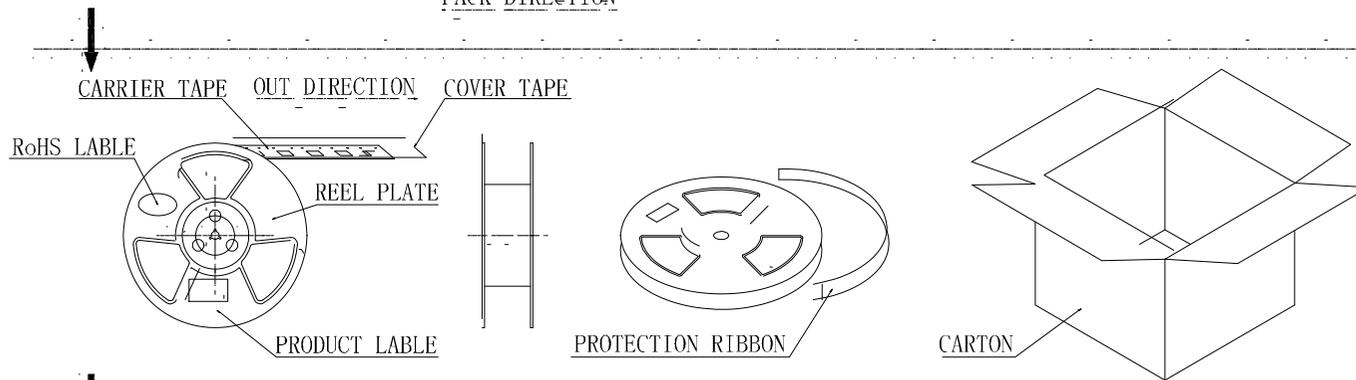


RoHS2.0

说明:

1. 每卷前后各空16PCS, 尾部用美纹胶纸封住;
2. 将产品放满盘后, 再卷一圈保护带, 用美纹胶纸将其封住, 并贴上1Pcs物料标签;
3. 每15卷盘一叠共15000Pcs, **每盘1000PCS**. 并装入1个外箱内;
4. 在搬运过程中要轻拿轻放;
5. 在运输中不可堆放过多(1.5M最高), 不可有重压现象;
6. 跌落测试条件:
成品箱从1.2米高度自由落体(一角三棱六面):
a. 产品不可跑出下带凹槽;
b. 产品不可有摔伤, 变形;
c. 内包装材料不可严重破损.

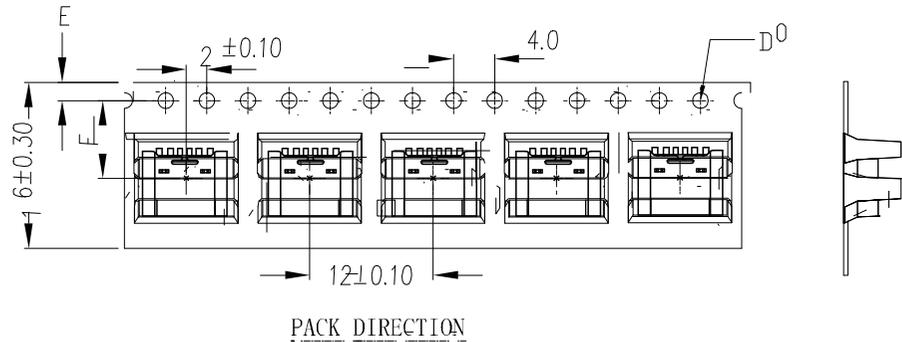

PCS/REEL	PCS/CARTON
1000	15000

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.							
A0	NEW RELEASE	2022. 12. 8		LINEAR	ANGLES	1:1									APPROVED	SKY	2022. 12. 8
			0.0±0.25	X° ±6°	DESIGNER	-	-	TITLE TYPE-C 6PIN SMT AF PASTER L=6.8MM (PACKAGING DRAWINGS)		REV					A0	SHEET	2/2
			0.00±0.15	X° X' ±3°	DRAWN	GSQ	2022. 12. 8										
			SIZE: A4	0.000±0.10	X° X' X'' ±2°												

1

2

3

4

5

6

7

8