



RoHS2.0




A




B

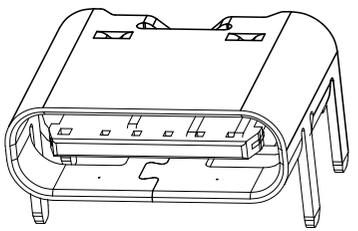


C

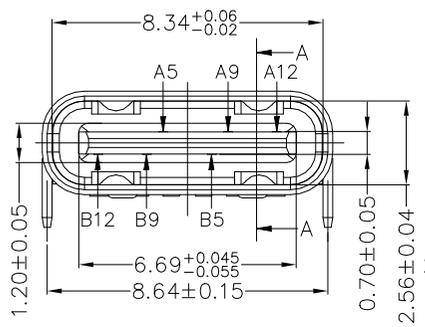


D

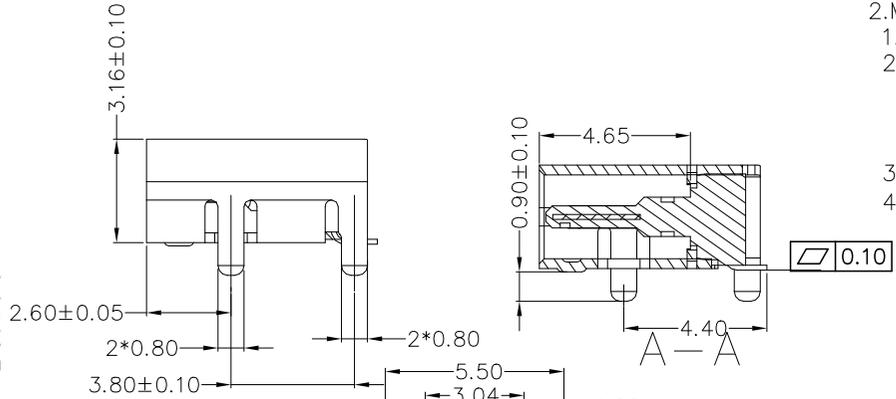

E

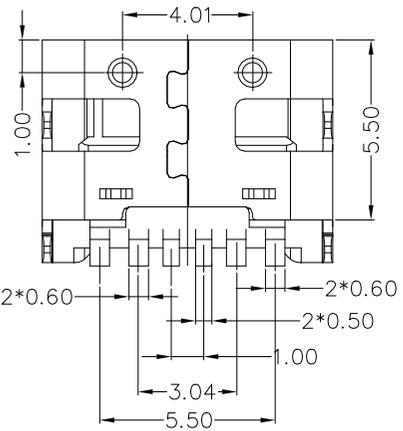

F

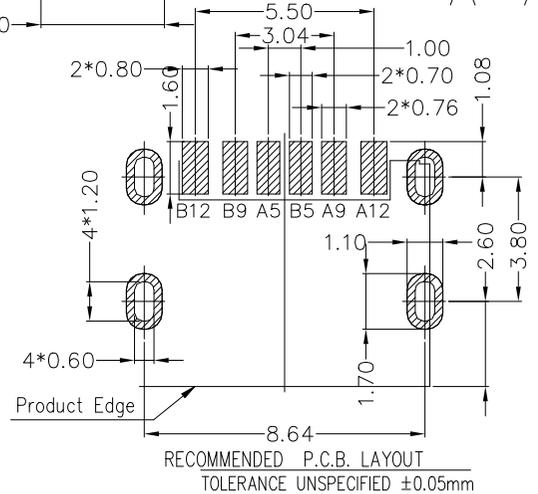

G

NOTES:

- SPECIFICATION:
 - CURRENT RATING: 3.0A MAX
 - VOLTAGE RATING: 20V DC/AC;
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 8N~20N,AFTER DURABILITY TEST: 6N~20N.
 - DURABILITY: 10000 CYCLES
- MATERIAL:
 - MOLDING: HIGH TEMPERATURE PLASTIC UL94 V-0
 - CONTACT: COPPER ALLOY
GOLD PLATED ON CONTACT AREA,
SN 80u" Min ON SOLDER AREA,
50u" NICKEL PLATING OVER ALL.
 - CENTER CLIP: STAINLESS STEEL
 - SHELL: STAINLESS STEEL 50u" NICKEL PLATING OVER ALL.

UCB11-06BB0 1 A N L-R

PIN NUMBER: 6PIN

CONTACT: _____

R:ROHS
PACK: L:TAPE REEL
COLOR: A:Black



- G/F CONTACT AREA
- 3u" CONTACT AREA
- 15u" CONTACT AREA
- 30u" CONTACT AREA

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	
A0	NEW RELEASE	2020. 5. 9		LINEAR	1: 1	SKY	2022. 12. 8	UCB11-06BB02KNL-R	ENDE05	
A1	Change frame	2022. 11. 7		ANGLES	APPROVED					
A2	Add electroplating specification	2022. 11. 30	UNIT: MM	0.00±0.15	DESIGNER	GSQ	2022. 12. 8	TITLE TYPE-C 6PIN SMT AF PASTER L=6.8MM	REV	
A3	Add electroplating specification	2022. 12. 8	SIZE: A3	0.000±0.10	DRAWN	YYG	2020. 5. 9			A3




H

H

RoHS2.0

说明:

1. 每卷前后各空16PCS, 尾部用美纹胶纸封住;
2. 将产品放满盘后, 再卷一圈保护带, 用美纹胶纸将其封住, 并贴上1Pcs物料标签;
3. 每15卷盘一叠共15000Pcs, 每盘1000PCS. 并装入1个外箱内;
4. 在搬运过程中要轻拿轻放;
5. 在运输中不可堆放过多(1.5M最高), 不可有重压现象;
6. 跌落测试条件:
成品箱从1.2米高度自由落体(一角三棱六面):
a. 产品不可跑出下带凹槽;
b. 产品不可有摔伤, 变形;
c. 内包装材料不可严重破损.

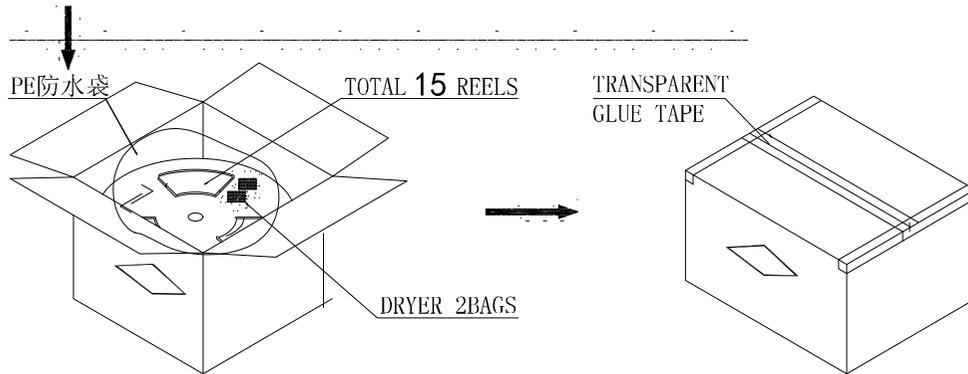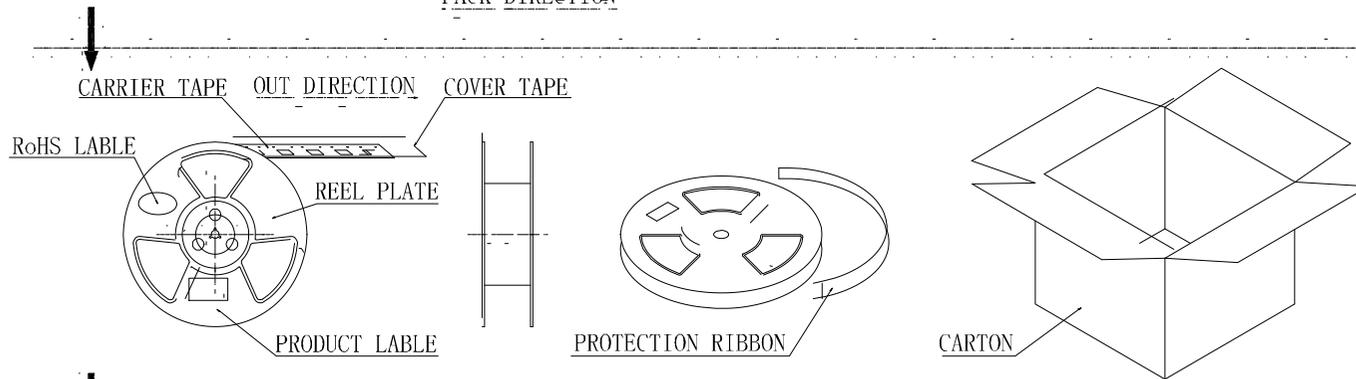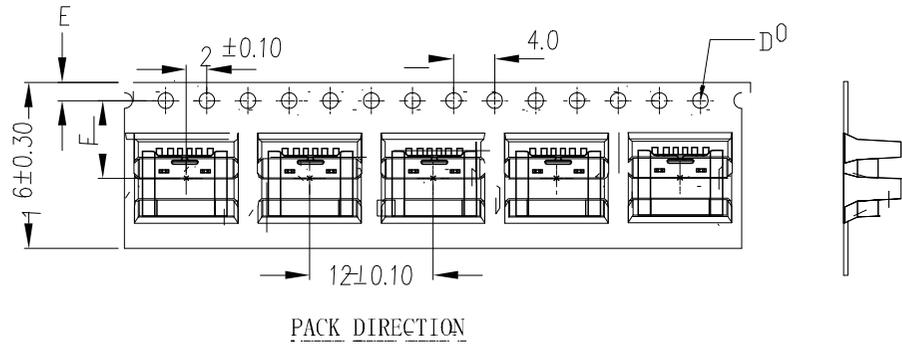

PCS/REEL	PCS/CARTON
1000	15000

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.							
A0	NEW RELEASE	2022. 12. 8		LINEAR	ANGLES	1:1									APPROVED	SKY	2022. 12. 8
			0.0±0.25	X° ±6°	DESIGNER	-	-	TITLE TYPE-C 6PIN SMT AF PASTER L=6.8MM (PACKAGING DRAWINGS)		REV					A0	SHEET	2/2
			0.00±0.15	X° X' ±3°	DRAWN	GSQ	2022. 12. 8										
			SIZE: A4	0.000±0.10	X° X' X'' ±2°												

1

2

3

4

5

6

7

8