
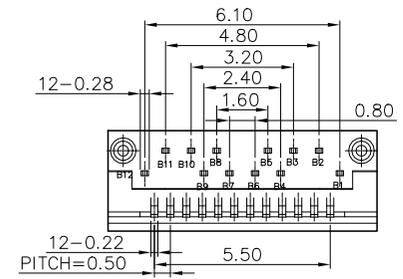
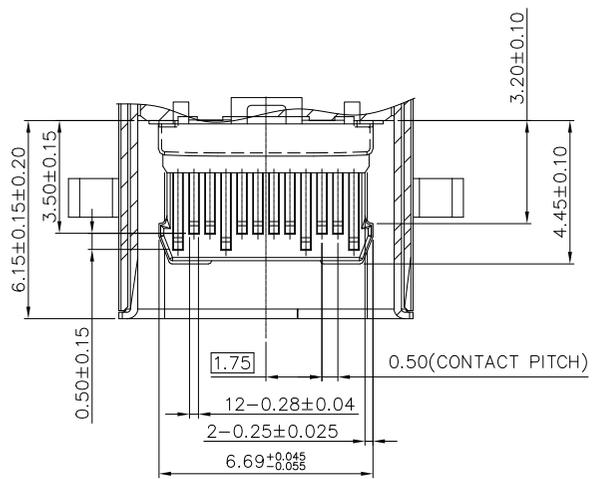




RoHS2. 0+HF

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

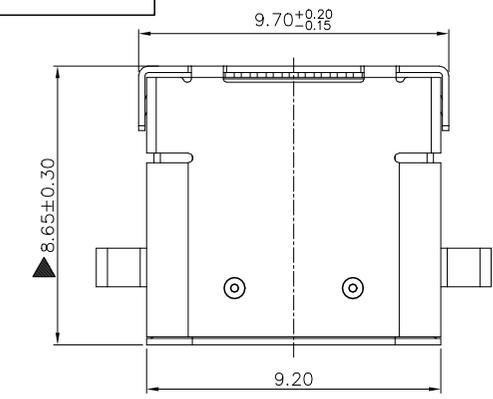


Detail A

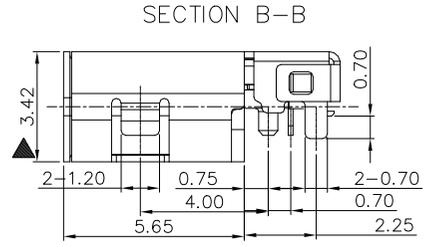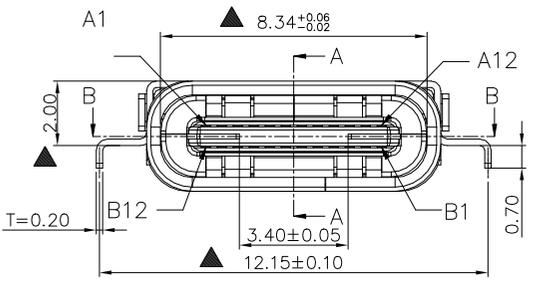


SECTION B-B

- NOTE:
- MATERIAL:
 - INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0; Black Color
 - CONTACT: C7025 (T=0.12mm)
 - SHELL: STAINLESS STEEL (T=0.20mm)
 - COVER SHELL: STAINLESS STEEL (T=0.20mm)
 - INNER GROUND COVER SHELL: STAINLESS STEEL (T=0.10mm)
 - MID PLATE: STAINLESS STEEL (T=0.10mm)
 - ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 40mΩ Max FOR INITIAL. 10mΩ CHANGE AFTER TEST. MEASURE AT 20mV, 100mA.
 - CONTACT CURRENT RATING: 5A FOR COLLECTIVELY POWER SUPPLY PIN (PINA1, A4, A9, A12, B1, B4, B9, B12); 1.25A FOR VCONN PIN; 0.25A FOR OTHER SIGNAL PIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R. M. S.
 - INSULATION RESISTANCE 100MΩ Min
 - OPERATING TEMPERATURE: -40° C ~ 85° C
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE: 5~20 N.
 - UNMATED FORCE: 8~20N INITIAL TEST; 6~20N DURABILITY AFTER TEST
 - DURABILITY: 10,000 CYCLES
 - PLATING
 - TERMINAL CONTACT: (SEE TAB) GOLD PLATING ON CONTACT AREA, ALL OVER 50u" Min NICKEL AND 80u" Min Matte Tin ALL OVER 50u" Min NICKEL ON SOLDER AREA
 - SHELL: 50u" Min. NICKEL ALL OVER,
 - COVER SHELL: 80u" Min. NICKEL ALL OVER,
 - INNER GROUND COVER SHELL: CLEAN
 - MID PLATE: CLEAN

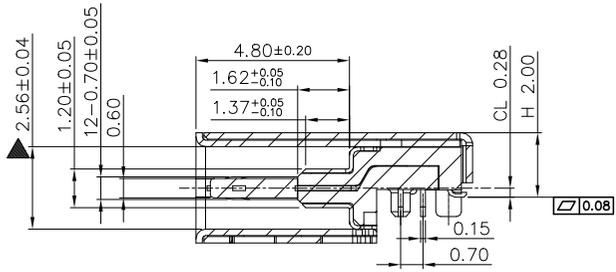


SECTION A-A

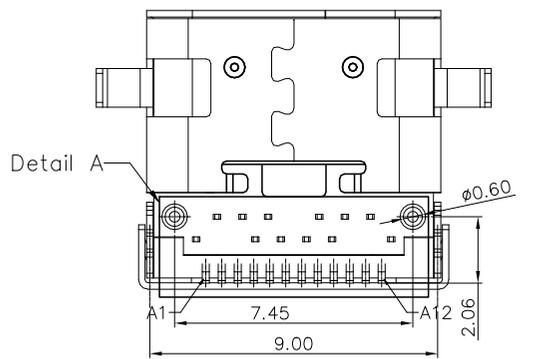

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	NEW RELEASE	2020.10.9		LINEAR	ANGLES	1:1								
				0.0±0.30	.X° ±3°	APPROVED	SKY	2020.10.9	UCB11-24BB02ANL-H	ENDE05				
				0.00±0.20	.XX° ±2°	DESIGNER	-	-	TITLE					
			SIZE: A4	0.000±0.10		DRAWN	YYG	2020.10.9	TYPE-C 24 PIN 前插后贴 沉板2.0MM L=8.65		REV	A0	SHEET	1/2

RoHS2.0+HF

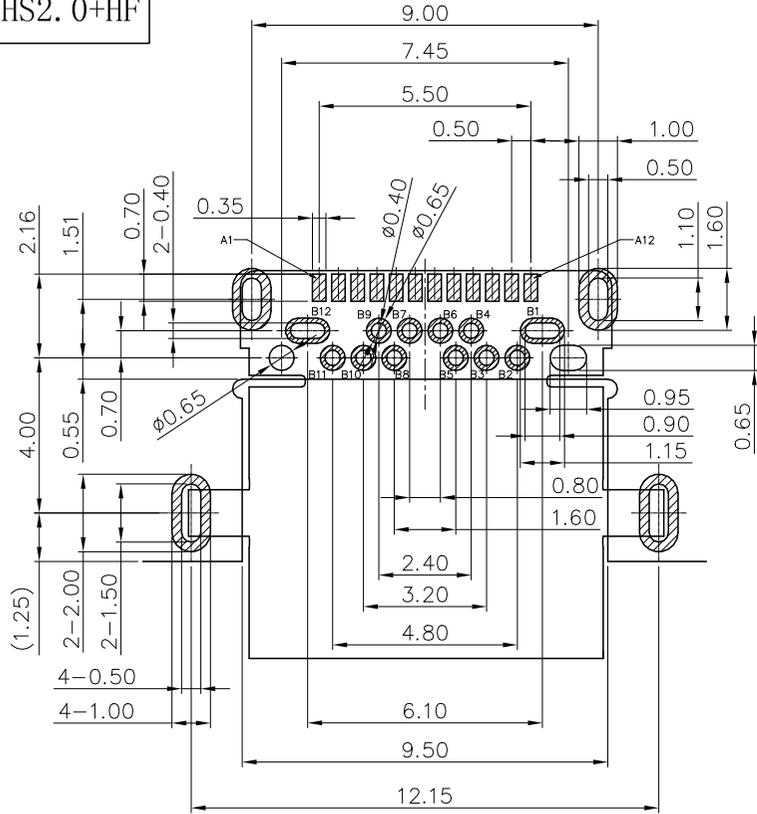

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05

KEEP OUT AREA

UCB11-24BB02 ANL-H

PIN 数码:
24:24PIN
X:XXPIN

电镀码:

- 1: G/F CONTACT AREA
- 2: 3 μ m CONTACT AREA
- 3: 5 μ m CONTACT AREA
- 4: 10 μ m CONTACT AREA
- 6: 20 μ m CONTACT AREA
- 7: 30 μ m CONTACT AREA
- 8: 其他

环保码:
R: ROHS
H: HF

包装码:
L: TAPE REEL
B: TRAY
G: TUBE
P: BAG

颜色码:
A: 黑色

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	VBUS	Bus Power	B9	VBUS	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use (SBU)	B5	CC2	Configuraation Channel
A9	VBUS	Bus Power	B4	VBUS	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	NEW RELEASE	2020.10.9	LINER	ANGLES	1:1	SKY	2020.10.9	UCB11-24BB02ANL-H	ENDE05				
			0.0 \pm 0.30	.X $^{\circ}$ \pm 3 $^{\circ}$	APPROVED	-	-	TITLE					
			UNIT: MM	0.00 \pm 0.20	DESIGNER	-	-	TYPE-C 24 PIN 前插后贴 沉板2.0MM L=8.65					
			SIZE: A4	0.000 \pm 0.10	DRAWN	YYG	2020.10.9			REV	A0	SHEET	2/2