

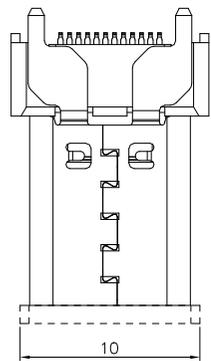
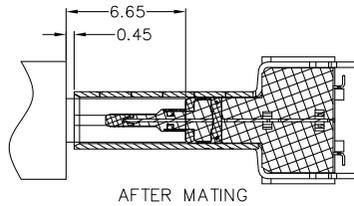


HF

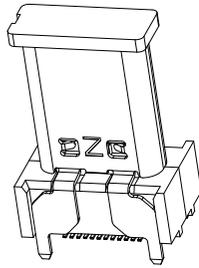

(COVER尺寸)



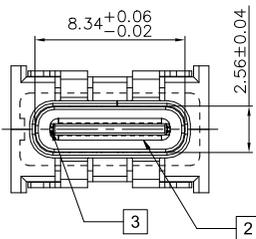


AFTER MATING


NOTE:
 1.Contact Resistance:40mOHM Max.;
 2.Dielectric Withstanding Voltage:100V AC For 1 Minute;
 3.Insulation Resistance:100M OHM Min.;
 4.Mating And Unmating Force:
 Mating Force: 5~20N
 Unmating Force: 8~20N;
 6~20N AFTER TEST;
 5.Durability:10000 Cycles;

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

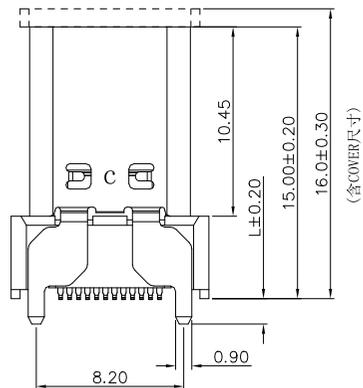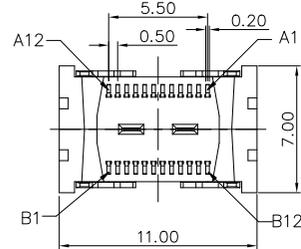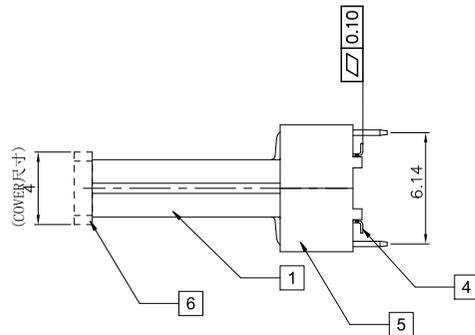

(含COVER尺寸)

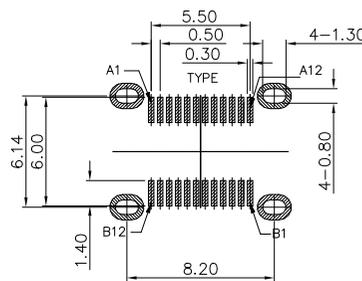

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05

KEEP OUT AREA

UCB11-24BB1 1 ANL-H

PIN数码:
24:24PIN
X:XXPIN

电镀码:

- 1: G/F CONTACT AREA
- 2: 3u" CONTACT AREA
- 3: 5u" CONTACT AREA
- 4: 10u" CONTACT AREA
- 6: 20u" CONTACT AREA
- 7: 30u" CONTACT AREA
- 8: 其他

环保码:
R: ROHS
H: HF

包装码:
L: TAPE REEL
B: TRAY
G: TUBE
P: BAG

颜色码:
A: 黑色

Item	Title	Material	Dispose	Q'TY	
1	Shell	SUS304	Ni: 30u" Min.	1PCS	
2	GND Plate	SUS301		2PCS	
3	Mid Plate	SUS301		1PCS	
4	Contact	C7025	Mating Area: See P/N Solder Tails: Matt Tin	24PCS	
L	5 InsertMolding	LCP	UL 94V-0 Black	1PCS	
1.4	1.7	6 COVER	LCP	UL 94V-0 Black	1PCS

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	NEW RELEASE	2020.10.9	LINEAR	ANGLES	1:1	SKY	2020.10.9	UCB11-24BB11ANL-H	ENDE05				
			0.0 ± 0.30	X° ± 2°	APPROVED	-	-	TITLE					
			0.00 ± 0.25		DESIGNER	YYG	2020.10.9	USB 3.1 TYPE C SMT直立式 H15.0					
			UNIT: MM		DRAWN					REV	A0	SHEET	1/3

1

2

3

4


5

6




7

8


HF

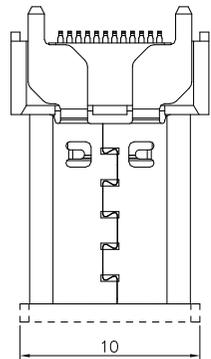


(COVER尺寸)

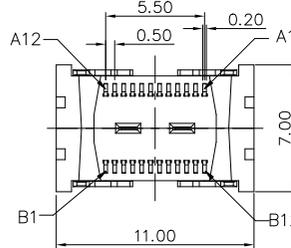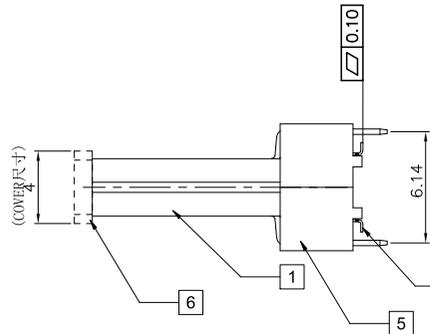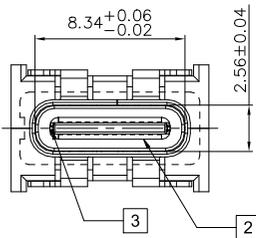

AFTER MATING

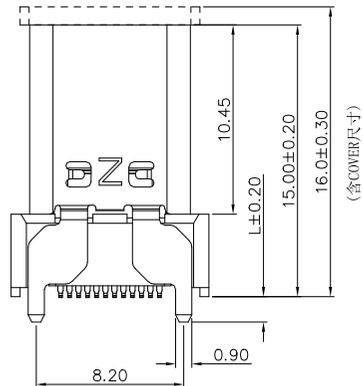

(含COVER尺寸)

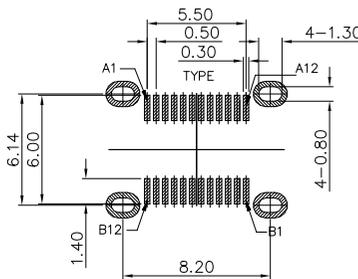

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05

KEEP OUT AREA

NOTE:

- 1.Contact Resistance:40mOHM Max.;
- 2.Dielectric Withstanding Voltage:100V AC For 1 Minute;
- 3.Insulation Resistance:100M OHM Min.;
- 4.Mating And Unmating Force:
Mating Force: 5~20N
Unmating Force: 8~20N;
6~20N AFTER TEST;
- 5.Durability:10000 Cycles;

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

UCB11-24BB1 1 ANL-H

PIN数码:
24:24PIN
X:XXPIN

电镀码:

- 1: 6/F CONTACT AREA
- 2: 3u" CONTACT AREA
- 3: 5u" CONTACT AREA
- 4: 10u" CONTACT AREA
- 6: 20u" CONTACT AREA
- 7: 30u" CONTACT AREA
- 8: 其他

环保码:
R: ROHS
H: HF

包装码:
L:TAPE REEL
B:TRAY
G:TUBE
P:RAG

颜色码:
A: 黑色

Item	Title	Material	Dispose	Q'TY	
1	Shell	SUS304	Ni: 30u" Min.	1PCS	
2	GND Plate	SUS301		2PCS	
3	Mid Plate	SUS301		1PCS	
4	Contact	C7025	Mating Area: See P/N Solder Tails: Matt Tin	24PCS	
L	5 InsertMolding	LCP	UL 94V-0 Black	1PCS	
1.4	1.7	6 COVER	LCP	UL 94V-0 Black	1PCS

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	NEW RELEASE	2020.10.9	LINEAR	ANGLES	1:1	SKY	2020.10.9	UCB11-24BB11ANL-H	ENDE05				
			0.0±0.30	X° ±2°	APPROVED	-	-	TITLE					
			0.00±0.25		DESIGNER	YYG	2020.10.9	USB 3.1 TYPE C SMT H15.0					
			UNIT: MM		DRAWN					REV	A0	SHEET	2/3
			SIZE: A4	0.000±0.08									

1

2

3


4

5

6

7

8

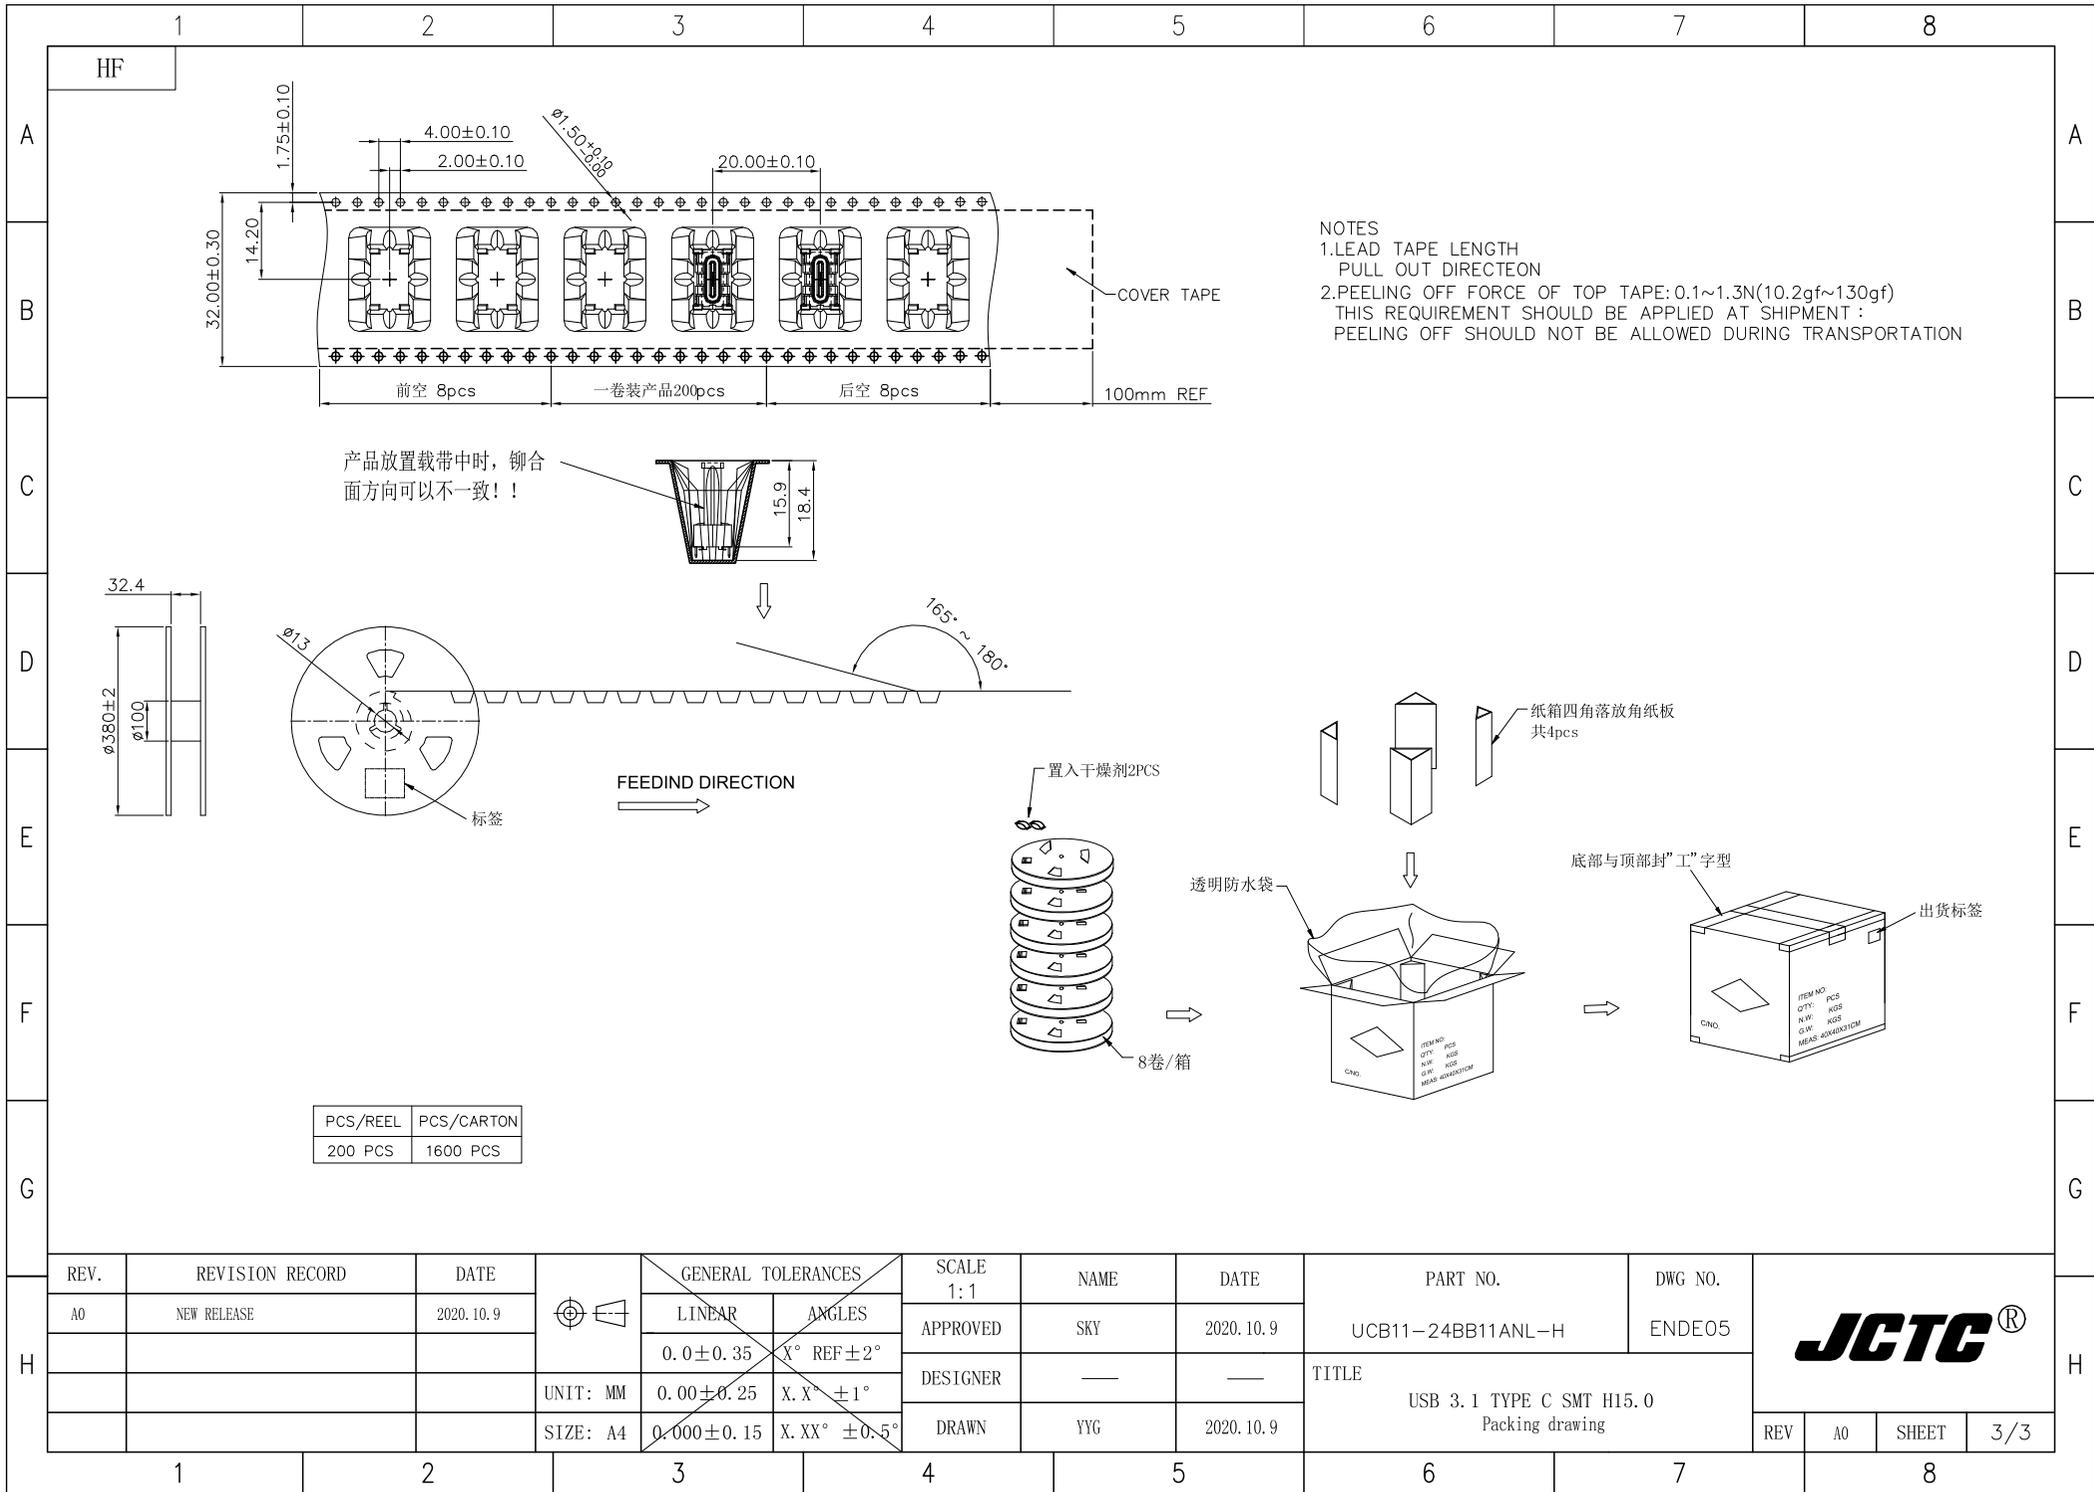

NOTES
 1.LEAD TAPE LENGTH
 PULL OUT DIRECTEON
 2.PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2gf~130gf)
 THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT :
 PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

产品放置载带中时，铆合面方向可以不一致！！

PCS/REEL	PCS/CARTON
200 PCS	1600 PCS

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	NEW RELEASE	2020.10.9		LINEAR	1:1	SKY	2020.10.9	UCB11-24BB11ANL-H	ENDE05				
				0.0±0.35	ANGLES						APPROVED		
			UNIT: MM	0.00±0.25	X.X° ±1°	DESIGNER		TITLE					
			SIZE: A4	0.000±0.15	X.XX° ±0.5°	DRAWN	YYG	2020.10.9	USB 3.1 TYPE C SMT H15.0 Packing drawing	REV	A0	SHEET	3/3