

RoHS2.0



NOTES:

1.SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10000 CYCLES

2.MATERIAL:

- 1.MOLDING: HIGH TEMPERATURE MATERIAL UL94 V-0
- 2.CONTACT: COPPER ALLOY
GOLD PLATED ON CONTACT AREA,
SN 100u Min ON SOLDER AREA,
- 3.CENTER CLIP: SUS 304
- 4.SHELL: SUS 50u" NICKEL PLATING OVER ALL.

A

A

B

B

C

C

D

D

E

E

F









F

G

G

H

H

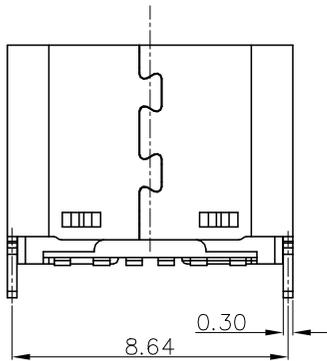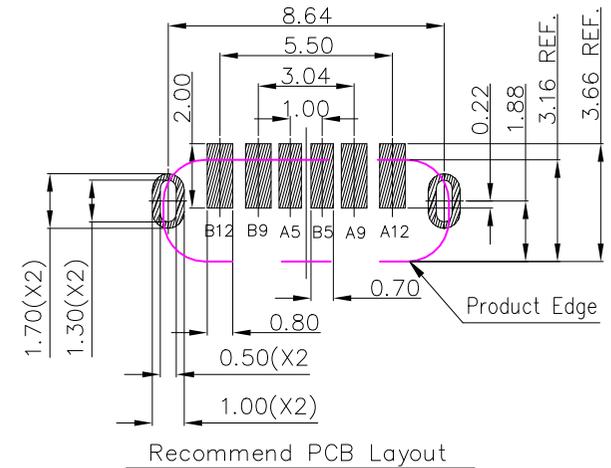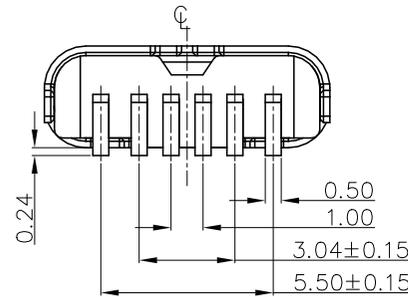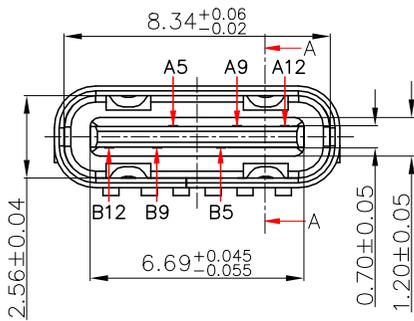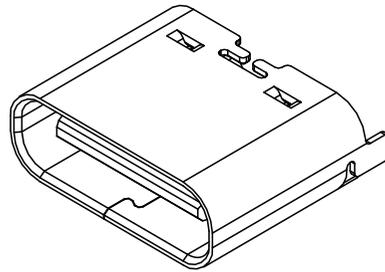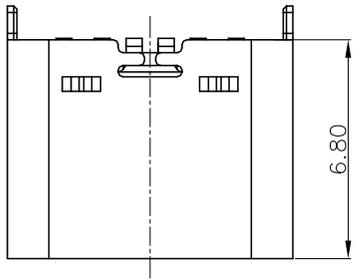

UCB13-06BB0 X A N L-R

PIN NUMBER :
6PIN

CONTACT:
1: G/F CONTACT AREA
2: 3u" CONTACT AREA
3: 5u" CONTACT AREA
5: 15u" CONTACT AREA
6: 20u" CONTACT AREA
7: 30u" CONTACT AREA

R: ROHS
L: TAPE REEL
COLOR :
A: Black

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.
A0	NEW RELEASE	2020.5.9	LINEAR	1:1	SKY	2022.12.8	UCB13-06BB02ANL-R	ENDE05
A1	Update border	2022.12.8	ANGLES	APPROVED	GSQ	2022.12.8		
			0.0±0.25	X*±5°	DESIGNER	YYG	TYPE-C 6PIN AF Erect sticker H=6.8	REV
			0.00±0.15	X.X*±3°	DRAWN	YYG		
			0.000±0.10	X.XX*±1°				SHEET
								1/2



1

2

3

4



5

6

7

8

RoHS2.0

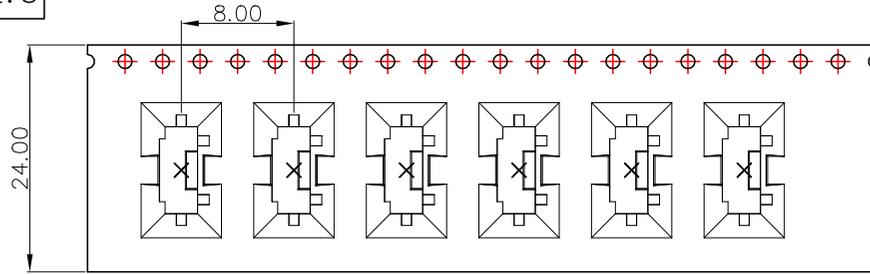






说明:

1. 每卷前后各空24PCS, 尾部用美纹胶封住;
2. 将产品放满后, 再卷一圈保护带, 用美纹胶粘住, 并贴上1PCS物料标签;
3. 每盘1000PCS, 一箱10盘, 每箱10000PCS, 装入一个外箱内;
4. 在运输过程中要轻拿轻放;
5. 在运输中不可堆放过多 (1.8M最高), 不可有重压现象;
6. 跌落测试条件:

成品箱从1.2米高度自由落体 (一角三菱六面)

- a. 产品不可跑出下带凹槽
- b. 产品不可有摔伤、变形;
- c. 内包装材料不可严重破损。

PACK DIRECTION

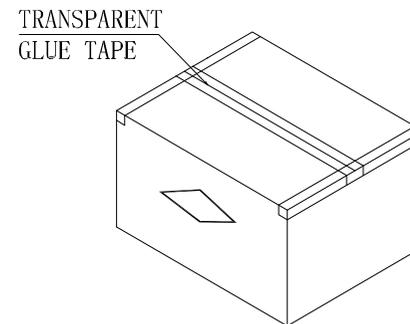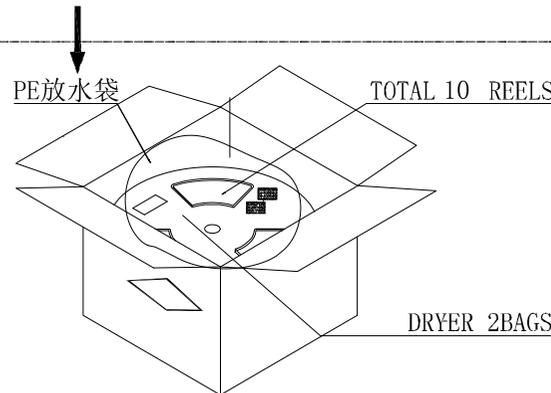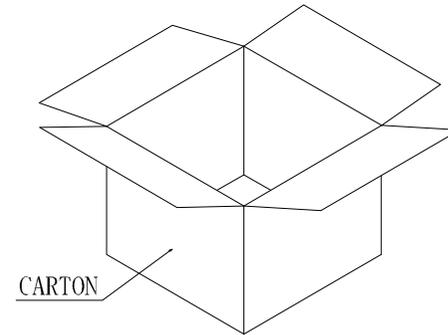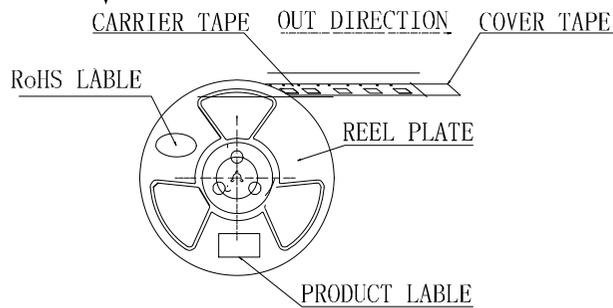

PCS/REEL	PCS/CARTON
1000	10000

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.				
A0	NEW RELEASE	2020.5.9		LINEAR	ANGLES	APPROVED	SKY	2022.12.8	UCB13-06BB02ANL-R	ENDE05				
A1	Update border	2022.12.8	0.0±0.25	X°±5°	DESIGNER	GSQ	2022.12.8	TITLE TYPE-C 6PIN AF Erect sticker H=6.8 (PACKAGING DRAWING)						
			UNIT: MM	0.00±0.15	X.X°±3°	DRAWN	YYG			2020.5.9				
			SIZE: A1	0.000±0.10	X.XX°±1°						REV	A1	SHEET	2/2