

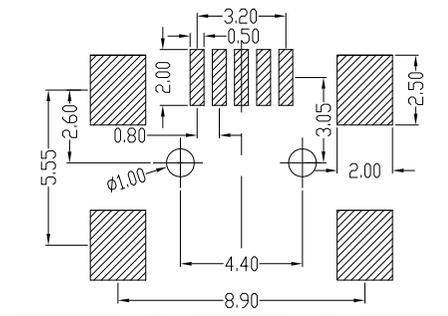
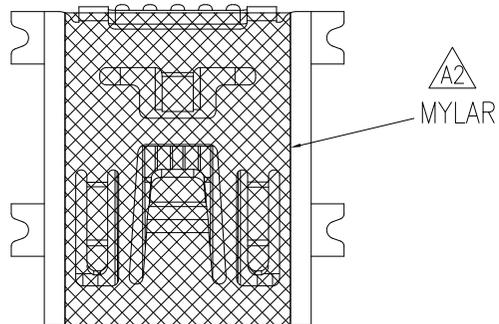
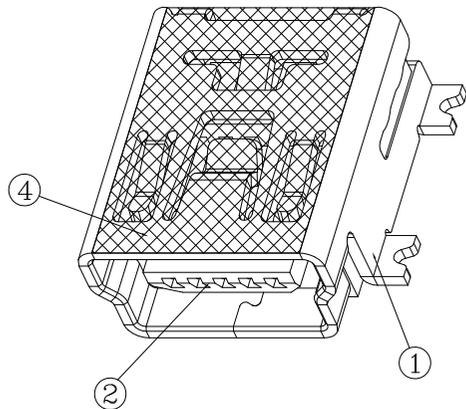
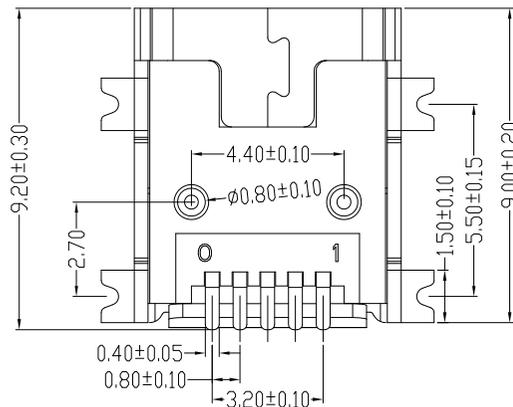

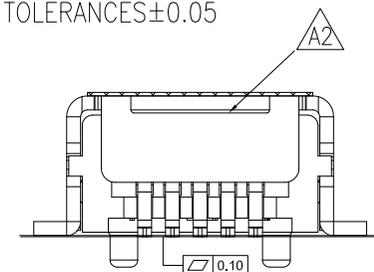



环保物料

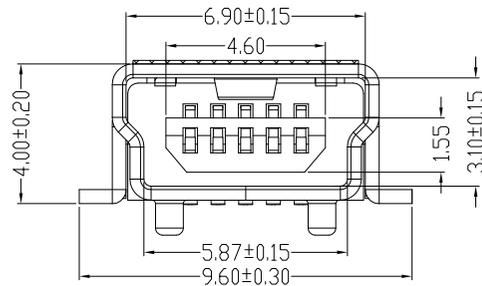

Recommended PCB Layout

TOLERANCES ±0.05



USBMN-S5P-A05-XX

① ② ③ ④ ⑤ ⑥

- ① MINI USB
- ② SMT
- ③ 5Pin
- ④ LCP Black
- ⑤ Series No.
- ⑥ Plating for contacts:
 0A=Gold Flash on contacts
 5E=Gold 3u' on contacts
 0G=Gold 15u' on contacts
 B5=Gold 30u' on contacts

SPECIFICATIONS
 VOLTAGE RATING: 30V DC
 CURRENT RATING: 1.0A
 CONTACT RESISTANCE: 50mΩ MAX
 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC MIN
 INSULATION RESISTANCE: 100MΩ MIN
 MATING FORCE: 3.5KGF MAX
 UNMATING FORCE: 0.7KGF MIN INITIAL
 HOUSING: LCP BLACK
 CONTACT: BRASS C2680
 CONTACT PLATED: GOLD FLASH/3u"/15u"/30u"
 SHELL: BRASS C2680
 SHELL PLATED: NICKEL PLATING

④	MYLAR	1	POLYIMIDE FILM
③	CONTACT	5	BRASS GOLD FLASH/1u"/15u"/30u" T=0.25mm
②	HOUSING	1	LCP UL94V-0 BK
①	SHELL	1	BRASS NICKEL PLATING T=0.40mm
ITEM	PART NAME	Q'TY/PCS	MATERIALS NOTE

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	新图面发行	16.08.23		LINEAR	ANGLES	1:1								
A1	更新图框发行	22.08.22	UNIT: MM	0.0±0.30	X°REF±6°	APPROVED	Dalun Dai	23.09.26	USBMN-S5P-A05-XX	ENDE05				
A2	按实物更新图面	23.09.26		0.00±0.25	X°±3°	DESIGNER								
			SIZE: A4	0.000±0.10	X°X'±2°	DRAWN			TITLE		REV	A2	SHEET	1/1

1

2

3

4


5

6







7

8

环保物料

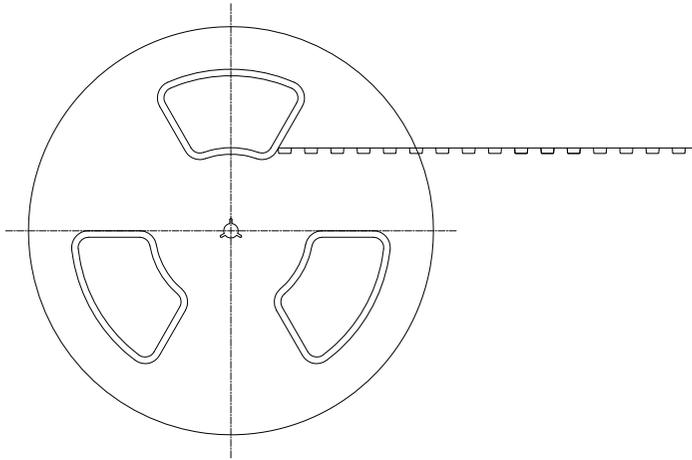

USE DIRECRION

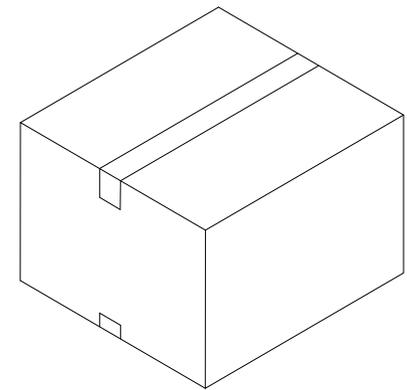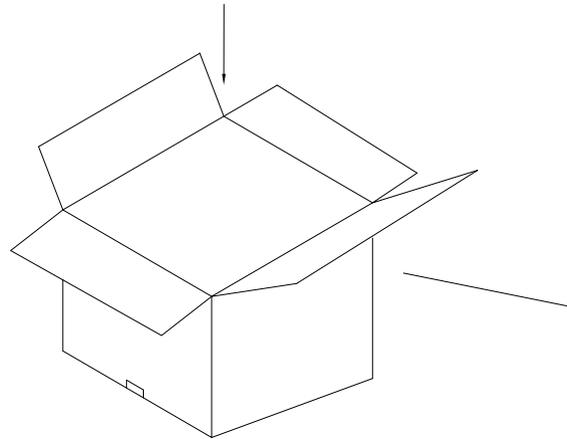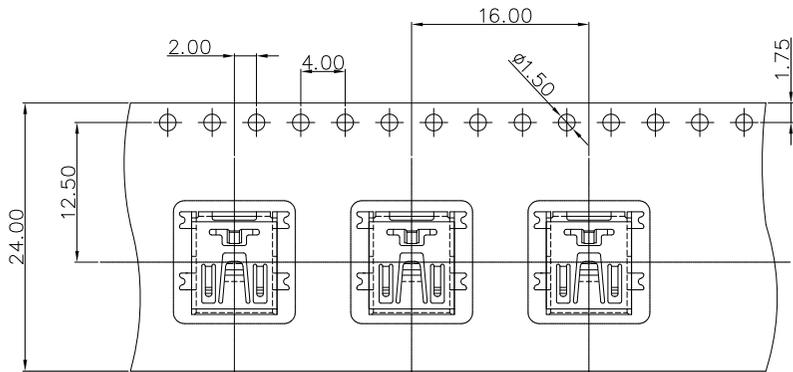

说明:

- 一卷数量为1000PCS.
- 一箱数量为10卷, 共计10000PCS.

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	新图面发行	19.11.15		LINEAR	ANGLES	1:1								
A1	更新图框发行	23.09.26	UNIT: MM	0.0±0.30	X° REF±6°	DESIGNER			TITLE					
			SIZE: A4	0.00±0.25	X° ±3°	DRAWN	Dalan Dai	23.09.26	MINI USB BF 5PIN SMT	REV	A1	SHEET	1/1	
				0.000±0.10	X° X' ±2°									

1

2

3

4

5

6

7

8