

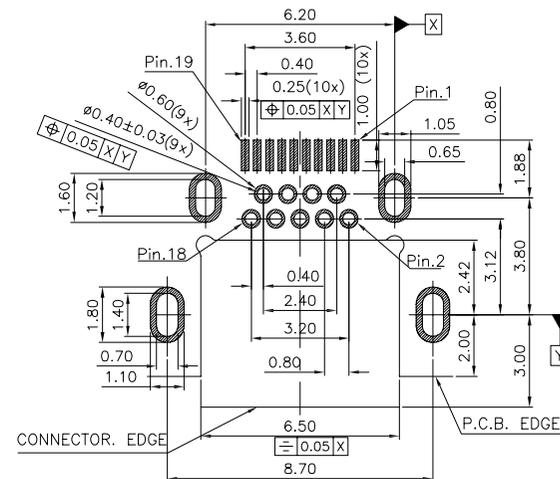

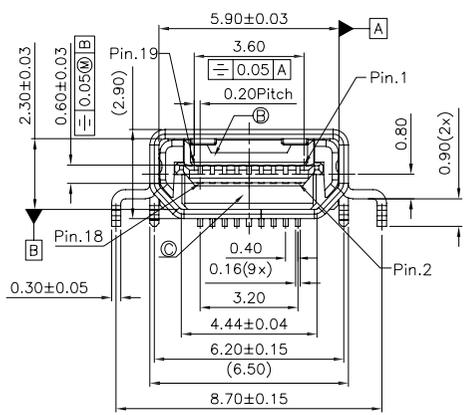
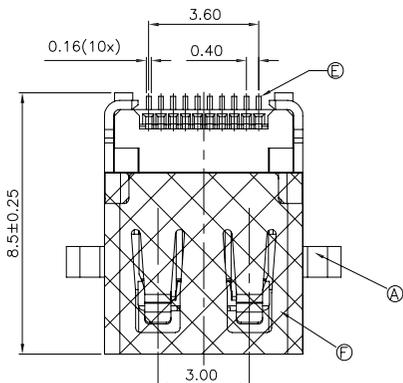


环保物料



RECOMMENDED P.C.B. LAYOUT(T=0.90mm)
TOLERANCE UNSPECIFIED ±0.05mm

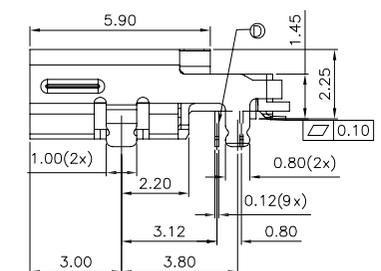

SPECIFICATIONS:


- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 0.3 AMP.
 - VOLTAGE RATING: 40V.
 - CONTACT RESISTANCE: 30mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN. @ 500V DC.
 - DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 4.5Kgf MAX.
 - WITHDRAWAL FORCE: 0.5~2.5Kgf.
- LIFE TEST: 5,000 CYCLES

PIN	Signal Assignment	PIN	Signal Assignment
1	Hot Plug Detect	2	Utility
3	TMDS Data2+	4	TMDS Data2 Shield
5	TMDS Data2-	6	TMDS Data1+
7	TMDS Data1 Shield	8	TMDS Data1-
9	TMDS Data0+	10	TMDS Data0 Shield
11	TMDS Data0-	12	TMDS Clock+
13	TMDS Clock Shield	14	TMDS Clock-
15	CEC	16	DDC/CEC Ground
17	SCL	18	SDA
19	+5V Power		

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
F	MYLAR	1	N/A	YELLOW
E	SMT CONTACT	10	COPPER ALLOY	SEE PART NO.
D	DIP CONTACT	9	COPPER ALLOY	SEE PART NO.
C	BOTTOM COVER	1	HIGH TEMP. THERMOPLASTIC UL 94V-0	BLACK
B	HOUSING	1	HIGH TEMP. THERMOPLASTIC UL 94V-0	BLACK
A	SHELL	1	STAINLESS STEEL	50u"MIN BLACK NI PLATING OVER ALL

				一般公差 GENERAL TOLERANCE		绘图 DR. 杨波		JCTC ® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司		料号 PART NO. W-00-601A-19001		
				X.X ±0.30	X' ±2'	校对 CHK.				文件编号 NUMBER ENDE05		
				X.XX ±0.20	X.X' ±1'	审核 CHK.		品名 TITLE HDMI D TYPE		比例 SCALE 1/1		
				X.XXX ±0.05	▲ MAJOR DIM.	核准 APPD.				SHEET 1/1		版次 REV. C0
C0	16.02.29	换图框发行	杨章雄	单位 UNIT mm								
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.								

环保物料

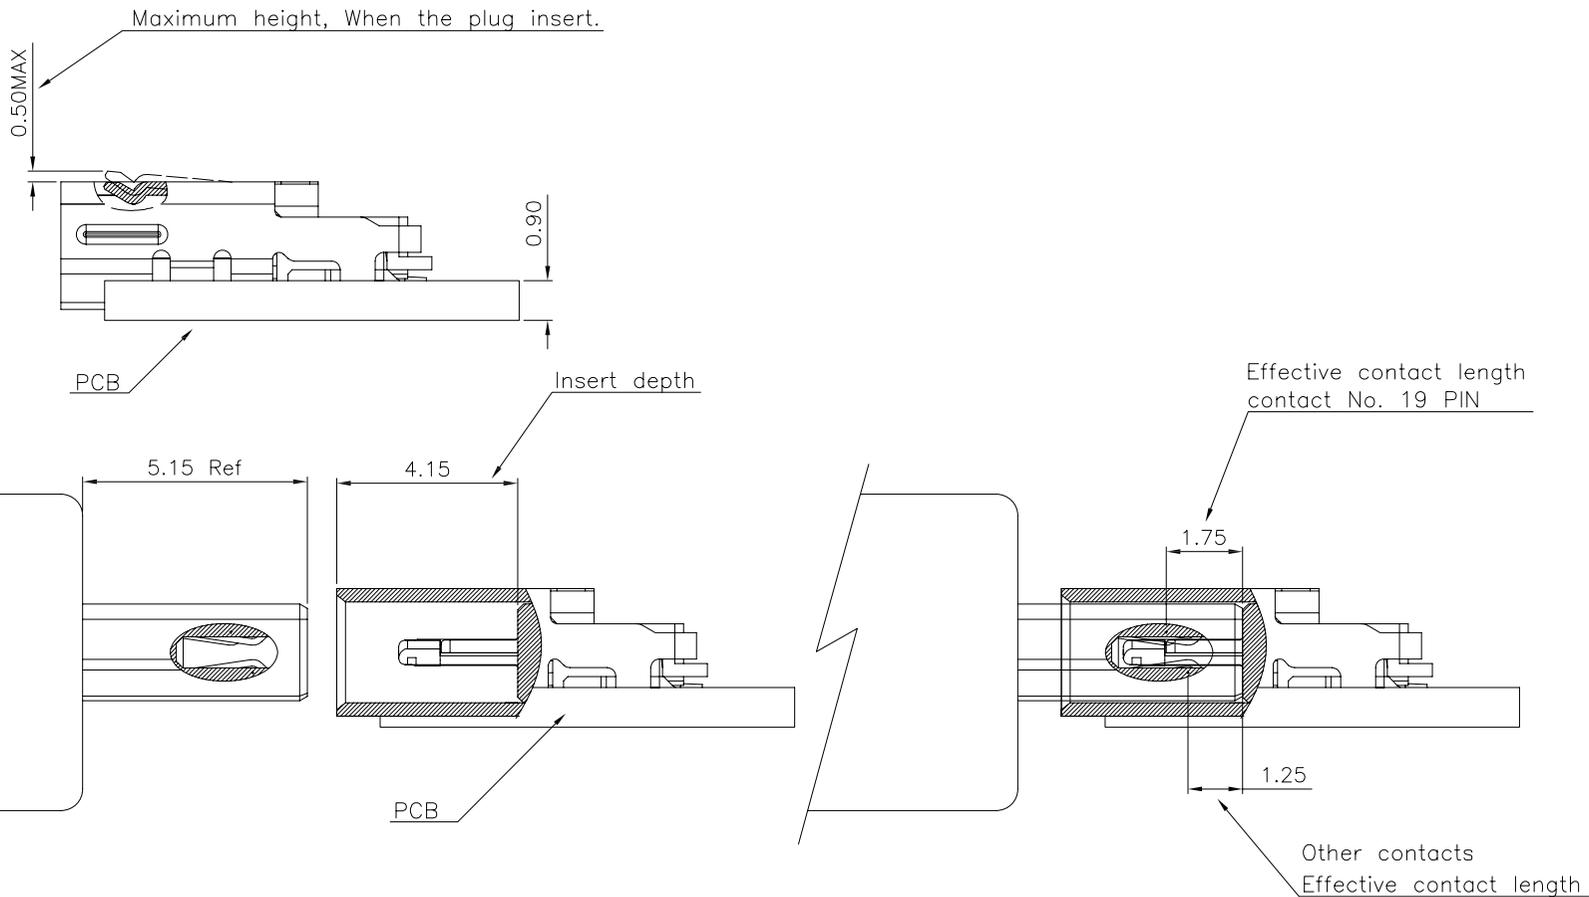

						一般公差 GENERAL TOLERANCE		绘图 DR. 杨波		料号 PART NO.		
						X.X ±0.30	X' ±2'	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司		W-00-601A-19001		
						X.XX ±0.20	X.X' ±1'			文件编号 NUMBER		
						X.XXX ±0.05	▲ MAJOR DIM.			ENDE05		
C0	16.02.29	换图框发行				单位 UNIT		品名 TITLE		比例 SCALE	SHEET	版次 REV.
版次 REV.	日期 DATE	变更内容 DESCRIPTION		审核 CHK.	核准 APPD.	mm			HDMI D TYPE	1/1	1/1	C0