
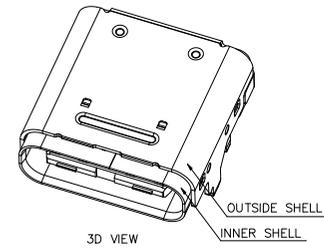


- NOTES:
- MATERIAL:
    - OUTSIDE SHELL: SUS301R-1/2H T=0.20mm
    - INNER SHELL: SUS301R-1/2H T=0.20mm
    - SIGNAL: SUS301R-H T=0.10mm
    - RFI PAD: SUS301R-H T=0.10mm
    - HOUSING: PA9T+30%G.F. UL94UL-0 BLACK
    - TERMINAL: NKE012-H T=0.10mm
  - PLATING SPECIFICATION
    - TERMINAL: SEE P/N
    - SHELL: NICKEL PLATED 60u"MIN.
  - MECHANICAL PERFORMANCE
    - INSERTION FORCE: 5N~20N.
    - WITHDRAWAL FORCE: INITIAL 8N~20N  
AFTER 1000 MATING CYCLES 6N~20N.
    - DURABILITY: 10000 CYCLES.
  - ELECTRICAL PERFORMANCE
    - CURRENT RATING: 3A.
    - LLCR: CONTACT: 40 mΩ MAX(INITIAL).
    - INSULATION RESISTANCE: UNMATED: 100 MΩ MIN.
    - DIELECTRIC WITHSTAND VOLTAGE: 100V AC.
  - IR REFLOW:
 

THE PEAK TEMPERATURE ON BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260±5i°C.
  - OPERATING TEMPERATURE RANGE: -55i°C~85i°C (WITHOUT LOSS FUNCTION).
  - RoHS COMPLIANT OR HALOGEN FREE COMPLIANT.

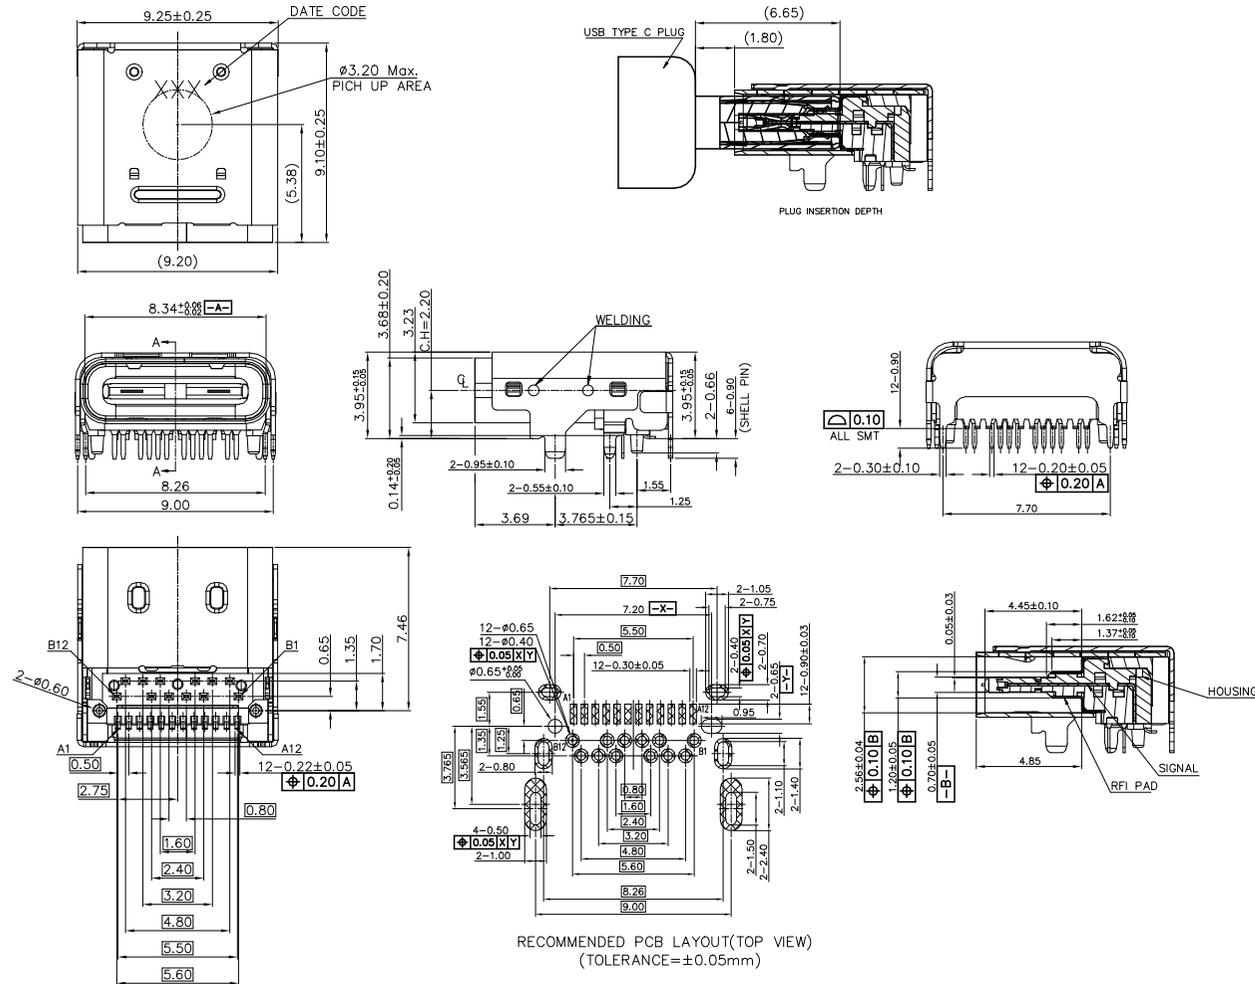

一般公差 GENERAL TOLERANCE	
X.X ±0.35	X° ±6°
X.XX ±0.25	X.X° ±3°
X.XXX ±0.15	▲ MAJOR DIM.
单位 UNIT	
mm	

绘图 DR.	
审核 CHK.	
核准 APPD.	

料号 PART NO.	文件编号 NUMBER
W-05-USB24P-CH22	ENDPW03
品名 TITLE	
USB TYPE-C 24P RECEPTACLE TOP-MOUNT CH=2.20mm/BH=3.88mm HYBRID TYPE	

比例 SCALE	SHEET	版次 REV.
1:1	1/1	A0



版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A0	17.05.04	新版发行	LXZ	LXZ