



环保物料





检验规范

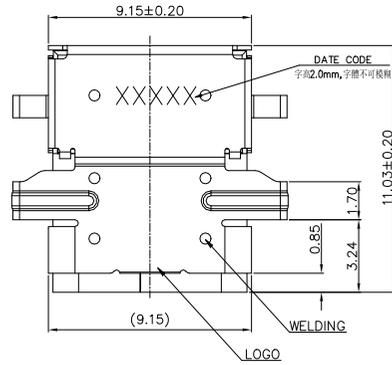



3D VIEW

NOTES:

1. MATERIAL:
 - 1.1 OUTSIDE SHELL: SUS301R-1/2H T=0.20mm
 - 1.2 INNER SHELL: SUS301R-1/2H T=0.20mm
 - 1.3 SIGNAL: SUS301R-1/2H T=0.10mm
 - 1.4 RFI PAD: SUS301R-1/2H T=0.08mm
 - 1.5 HOUSING: LCP+30%G.F. UL94UL-0 BLACK
 - 1.6 TEMINARL: C19400-H T=0.10mm
2. PLATING:
 - 2.1 TERMINAL: SEE PIN
 - 2.2 SHELL: NICKEL PLATED 60u"MIN.
3. ELECTRICAL CHARACTERISTICS:
 - 3.1 CURRENT RATING: 3.0 A
VOLTAGE RATING: 5.0 V
 - 3.2 LLCR: VBUS& GND PINS: 40mΩ/PIN MAX
OTHER PINS : 40mΩ/PIN MAX
LLCR MAX. CHANGE OF ALL PINS: 10mΩ
 - 3.3 INSULATION RESISTANCE: 100MΩ MIN.
4. MECHANICAL CHARACTERISTICS:
 - 4.1 INSERTION FORCE: 0.5~2.0kg.
 - 4.2 WITHDRAWAL FORCE: 0.8~2.0kg.(INITIAL) 0.5~2.0kg.(AFTER LIFE TEST)
5. LIFE TEST: 10000 CYCLES MIN

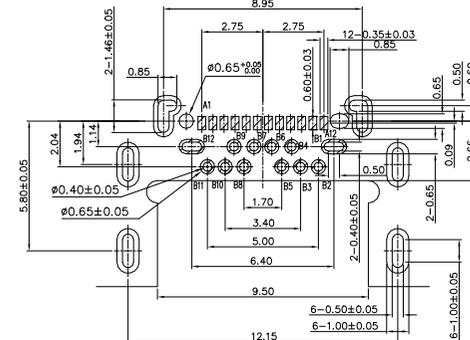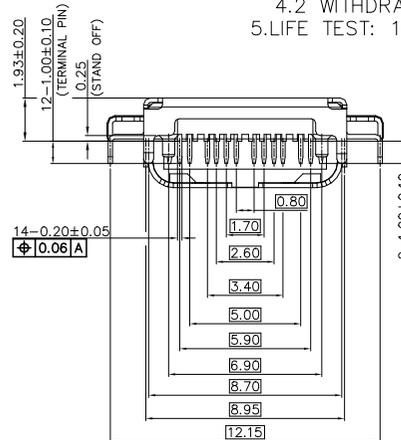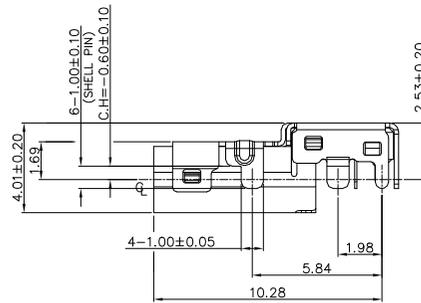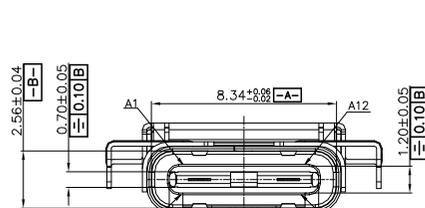

RECOMMENDED PCB LAYOUT(TOP VIEW)
(TOLERANCE=±0.05mm)

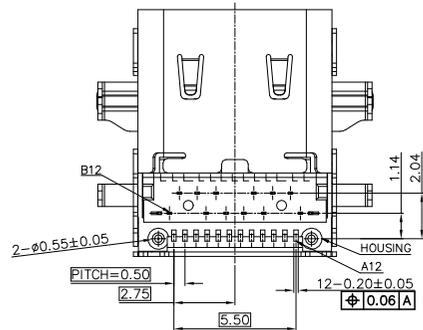

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	SSTX+	SSTX-	VBUS	RFU1	D-	D+	CC1	VBUS	SSTX-	SSTX+	GND
GND	SSTX+	SSTX-	VBUS	CC2	D+	D-	RFU2	VBUS	SSTX-	SSTX+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

					一般公差GENERAL TOLERANCE		绘图DR.		料号 PART NO.		文件编号 NUMBER		JCTC ®	
					X.X ±0.30	X* ±5°	校对CHK.		W-06-USB5-A30		ENDPT01			
A1					21.07.15	更新图框发行	董东平	杨章雄	品名TITLE					
A0					19.05.10	新图面发行	李兴泽	杨章雄	USB TYPE C (C.H=0.60mm)		比例SCALE		SHEET	
版次REV.					日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.			1/1		版次REV.	
					mm						1/1		A1	

