

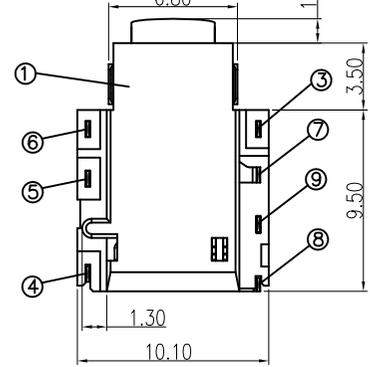
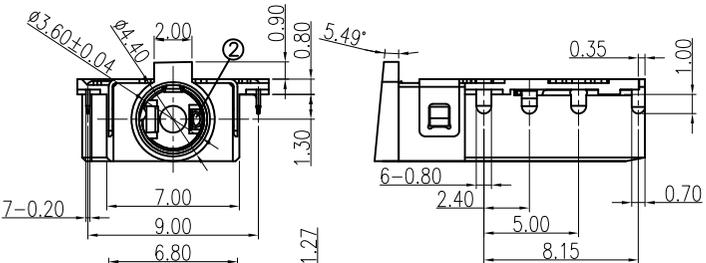


RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)

NOTES:

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
 - 3.1. VOLTAGE RATING: 12 VAC RMS;
 - 3.2. CURRENT RATING: 0.5 AMP;
 - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial), 100mΩ Max.(After Life test);
 - 3.4. INSULATION RESISTANCE: 1000 MΩ Min., 500VDC.(Initial), 100 MΩ Min., 500VDC.(After Humidity test);
 - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
 - 4.1. MATING FORCE: 3.0Kgf MAX.;
 - 4.2. UNMATING FORCE: 0.3Kgf MIN.;
 - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
 5. ENVIRONMENTAL:
 - 5.1. OPERATION: -30°C~+80°C.

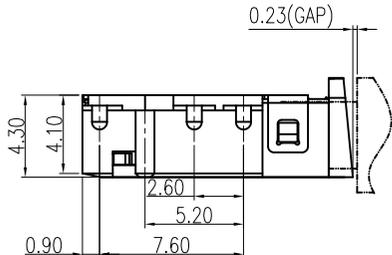

3D VIEW






PLUG SPEC	SCHEMATIC	AFTER INSERT SCHEMATIC

TABLE 1:

NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
⑨	Shell	1	Stainless steel	Ni 50u" Min	T=0.20mm
⑧	Contact_5	5	Phosphor bronze	Gold Flash On Contact And Solder Tail Area,50u" Nickel UnderPlated	T=0.20mm
⑦	Contact_6	1	Phosphor bronze		T=0.20mm
⑥	Contact_4	1	Phosphor bronze		T=0.20mm
⑤	Contact_3	1	Phosphor bronze	Gold Flash on contact area, Plate Matte tin on solder tail, Nickel underplated.	T=0.20mm
④	Contact_2	1	Phosphor bronze		T=0.20mm
③	Contact_1	1	Phosphor bronze		T=0.20mm
②	Separator	1	PA10T	Black,UL94V-0	
①	Housing	1	PA10T	Black,UL94V-0	

一般公差 GENERAL TOLERANCE					绘图 DR.	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS		
X.X	±0.30	X*	±2*	校对 CHK.	李兴泽	W-07-0353-DC02	ENDPT01			
X.XX	±0.20	X.X*	±1*	审核 CHK.	董东平	品名TITLE				
X.XXX	±0.10	▲ MAJOR DIM.		核准 APPD.	董东平	ø3.5mm Phone Jack CONN.		比例 SCALE	SHEET	版次 REV.
单位 UNIT	mm				杨章雄			1/1	1/1	A1

环保物料

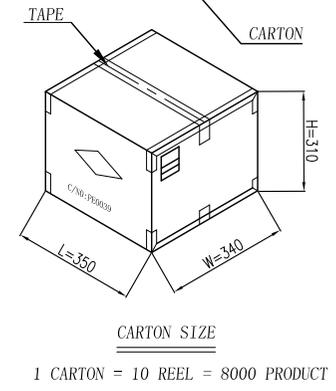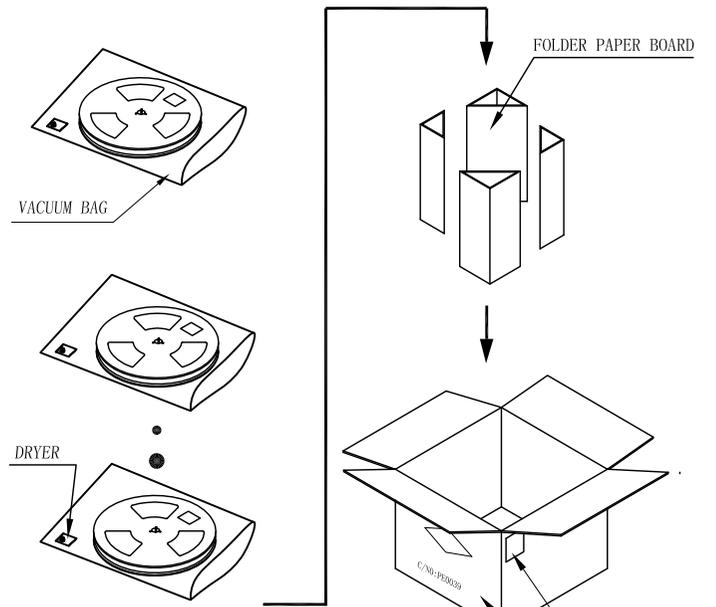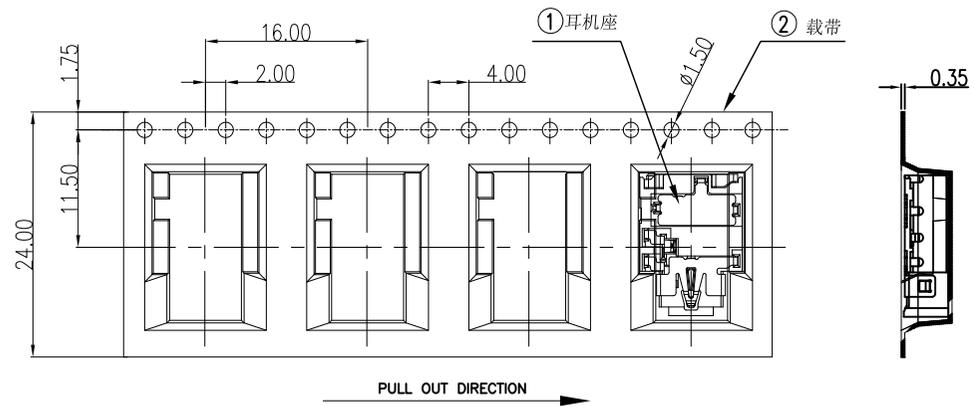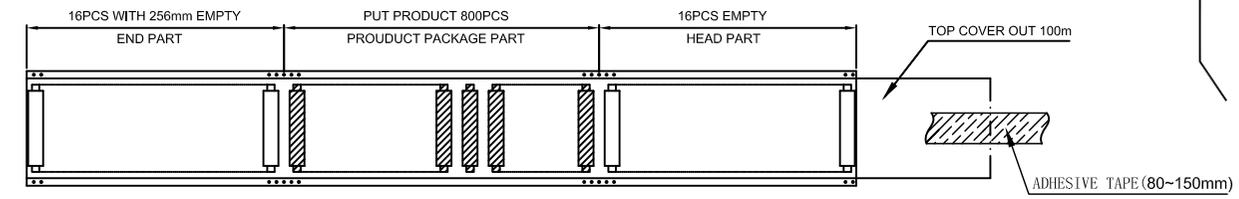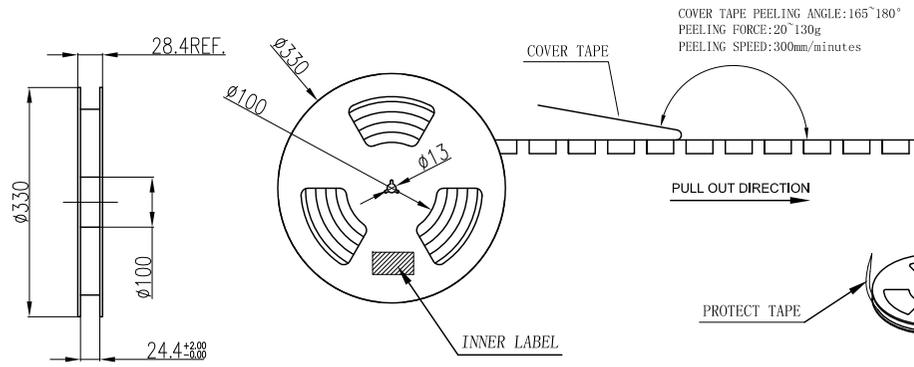

- NOTES:
- Material requirements:
 - The carton material requirements for the K=A, Dimension is 350*340*310mm;
 - Reel materials for PET; size reel for 330*28.4.
 - Packaging requirements:
 - The tape into the packing machine, before the empty 16PCS, after the release of the product 800PCS, then the empty 16PCS with 256mm length of stay;
 - Top cover should out 100mm of the carrier tape. After winding, using adhesive tape(80-150mm) to stick the leader of cover tap on the side of the carrier tape;
 - Winding a protect tape around the reel, then stick it by adhesive tape;
 - label should paste in the designated area of the reel;
 - Put a dryer and a packed reel in the vacuum bag and make the vacuum process;
 - The tired folded 10 disks in the carton total 8000pcs;
 - Packed finished packing sealing, and in the outer carton label

					一般公差 GENERAL TOLERANCE	绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS		
A1	21. 09. 16	更新图框发行	董东平	杨章雄	X.X ±0.30	X' ±2'		W-07-0353-DC02	ENDPT01			
A0	17. 07. 05	新图面发行	李兴泽	杨章雄	X.XX ±0.20	X.X' ±1'		品名 TITLE		比例 SCALE	SHEET	版次 REV.
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	X.XXX ±0.10	▲ MAJOR DIM.		φ3.5mm Phone Jack CONN.		1/1	1/1	A1