
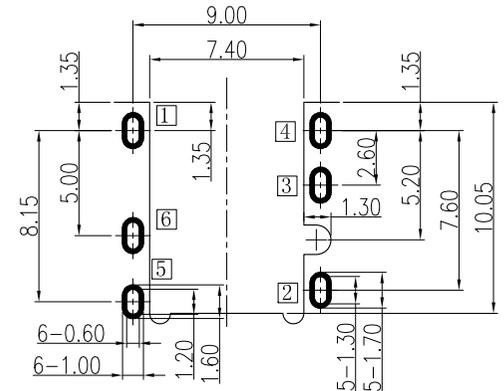
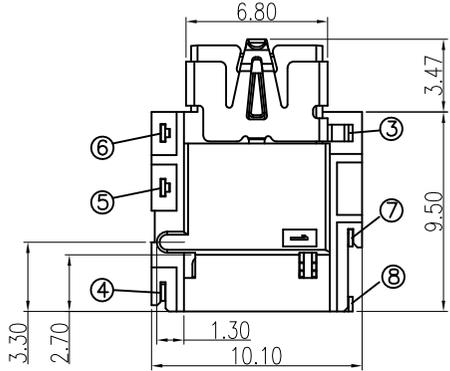
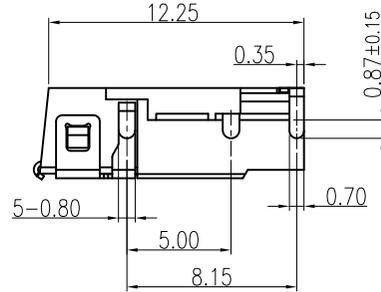
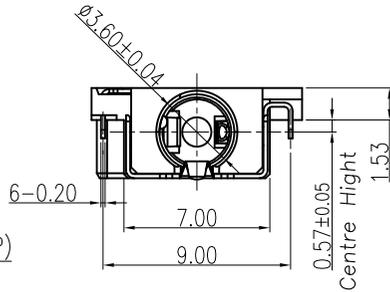
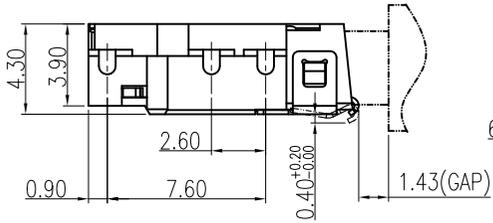



环保物料



**RECOMMENDED P.C.B. LAYOUT**  
TOP VIEW (TOLRANCE:±0.05)

NOTES:

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
  - 3.1. VOLTAGE RATING: 12 VAC RMS;
  - 3.2. CURRENT RATING: 0.5 AMP;
  - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial), 100mΩ Max.(After Life test);
  - 3.4. INSULATION RESISTANCE: 1000 MΩ Min., 500VDC.(Initial), 100 MΩ Min., 500VDC.(After Humidity test);
  - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
  - 4.1. MATING FORCE: 3.0Kgf MAX.;
  - 4.2. UNMATING FORCE: 0.3Kgf MIN.;
  - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
  - 5.1. OPERATION: -30°C~+80°C.



3D VIEW





PLUG SPEC	SCHEMATIC	AFTER INSERT SCHEMATIC

TABLE 1:

NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
⑨	MYLAR	1	T=0.08mm	BLACK	
⑧	Contact_5	⑤	Phosphor bronze	Au1u"Min	T=0.20mm
⑦	Contact_6	⑥	Phosphor bronze	Au1u"Min	T=0.20mm
⑥	Contact_4	④	Phosphor bronze	Au1u"Min; Tin50u"Min	T=0.20mm
⑤	Contact_3	③	Phosphor bronze	Au1u"Min; Tin50u"Min	T=0.20mm
④	Contact_2	②	Phosphor bronze	Au1u"Min; Tin50u"Min	T=0.20mm
③	Contact_1	①	Phosphor bronze	Au1u"Min; Tin50u"Min	T=0.20mm
②	Separator	1	PA10T UL94V-0	Black	
①	Housing	1	PA10T UL94V-0	Black	


一般公差 GENERAL TOLERANCE					绘图 DR.	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS		
X.X ±0.30	X* ±2*	校对 CHK.	李兴泽	W-09-0350-PC08	ENDPT01	比例 SCALE 1/1    SHEET 1/1    版次 REV. A1				
X.XX ±0.20	X.X* ±1*	审核 CHK.	董东平	品名 TITLE	∅3.5mm Phone Jack CONN.					
X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.	董东平							
单位 UNIT mm			杨章雄							

# 环保物料

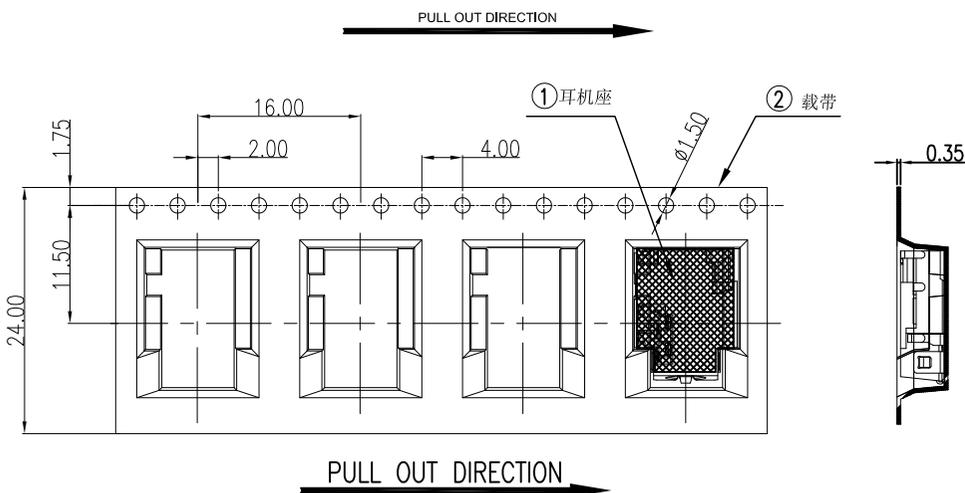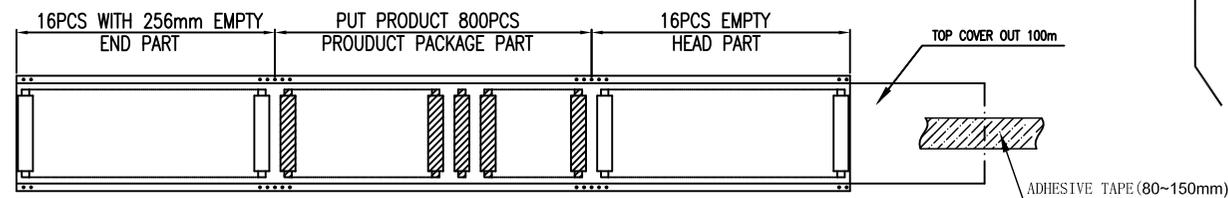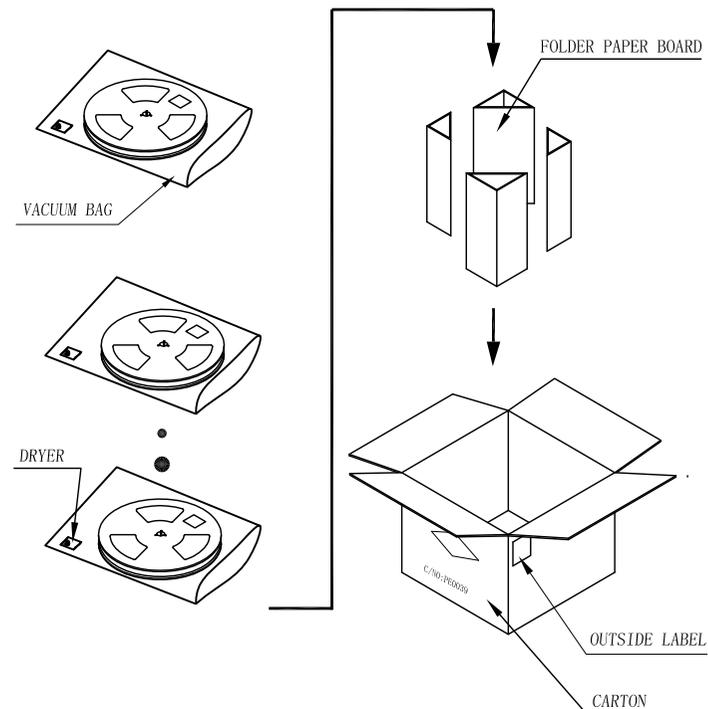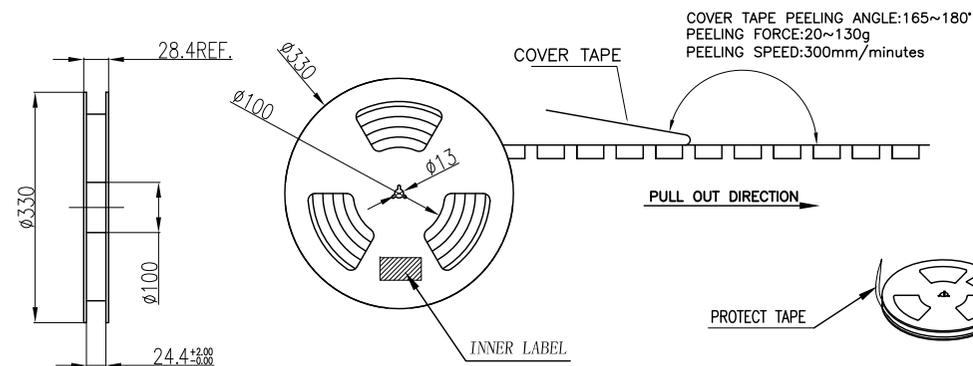

### NOTES:

- Material requirements:
  - The carton material requirements for the K=A, Dimension is 350\*340\*310mm;
  - Reel materials for PET; size reel for 330\*28.4.
- Packaging requirements:
  - The tape into the packing machine, before the empty 16PCS, after the release of the product 800PCS, then the empty 16PCS with 256mm length of stay;
  - Top cover should out 100mm of the carrier tape. After winding, using adhesive tape (80~150mm) to stick the leader of cover tap on the side of the carrier tape;
  - Winding a protect tape around the reel, then stick it by adhesive tape;
  - label should paste in the designated area of the reel;
  - Put a dryer and a packed reel in the vacuum process;
  - The tired folded 10 disks in the carton total 8000pcs;
  - Packed finished packing sealing, and in the outer carton label

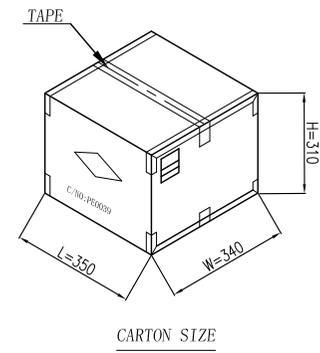

1 CARTON = 10 REEL = 8000 PRODUCT

					一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS			
					X.X ±0.30	X* ±2*	校对		W-09-0350-PC08	ENDPT01				
					X.XX ±0.20	X.X* ±1*	审核		品名 TITLE			比例 SCALE	SHEET	版次 REV.
					X.XXX ±0.10	▲ MAJOR DIM.	审核		Ø3.5mm Phone Jack CONN.			1/1	1/1	A1
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT			核 准						