



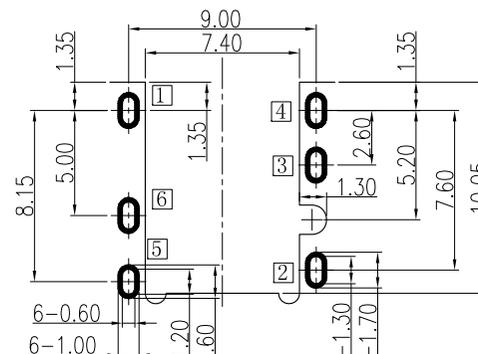
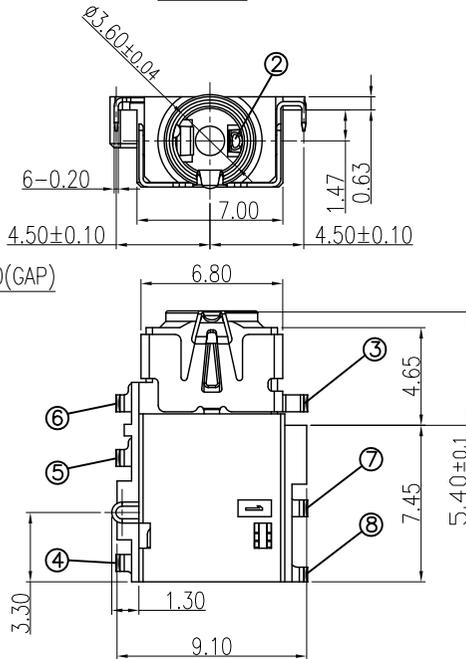


环保物料

检验规范

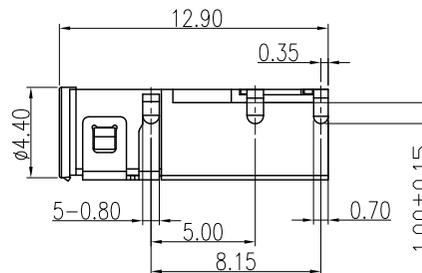

3D VIEW

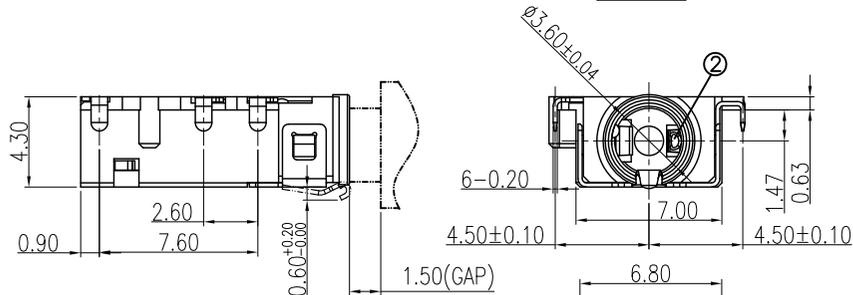

NOTES:

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
 - 3.1. VOLTAGE RATING: 12 VAC RMS;
 - 3.2. CURRENT RATING: 1 AMP;
 - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial), 100mΩ Max.(After Life test);
 - 3.4. INSULATION RESISTANCE: 100 MΩ Min., 500VDC.(Initial), 50 MΩ Min., 500VDC.(After Humidity test);
 - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
 - 4.1. MATING FORCE: 0.3-3.0Kgf.
 - 4.2. UNMATING FORCE: 0.3-3.0Kgf.
 - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
 - 5.1. SALT SPRAY: 48H.
 - 5.2. OPERATION: -30°C~+80°C.

RECOMMENDED P.C.B LAYOUT

TOP VIEW (TOLRANCE:±0.05)

TABLE 1:

NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
⑧	Contact_5	⑤	1 Phosphor bronze	Au 1u"Min	T=0.20mm
⑦	Contact_6	⑥	1 Phosphor bronze	Au 1u"Min	T=0.20mm
⑥	Contact_4	④	1 Phosphor bronze	Au 1u"Min	T=0.20mm
⑤	Contact_3	③	1 Phosphor bronze	Au 1u"Min	T=0.20mm
④	Contact_2	②	1 Phosphor bronze	Au 1u"Min	T=0.20mm
③	Contact_1	①	1 Phosphor bronze	Au 1u"Min	T=0.20mm
②	Separator	1	HIGH TEMP. PLASTIC	Black	
①	Housing	1	HIGH TEMP. PLASTIC	Black	

PLUG SPEC	SCHEMATIC	AFTER INSERT SCHEMATIC

一般公差 GENERAL TOLERANCE					绘图 DR.	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS		
X.X ±0.30	X' ±2*	校对 CHK.	李兴泽	W-20-0350-J063	ENDPT01	品名TITLE ø3.5mm Phone Jack CONN. 中心高-1.47				
X.XX ±0.20	X.X' ±1*	审核 CHK.	董东平	比例 SCALE 1/1 SHEET 1/1 版次 REV. A1						
X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.	董东平				杨章雄			
单位 UNIT mm		杨章雄	版次 REV. A1							

