

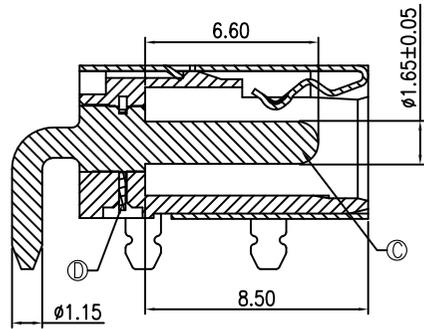
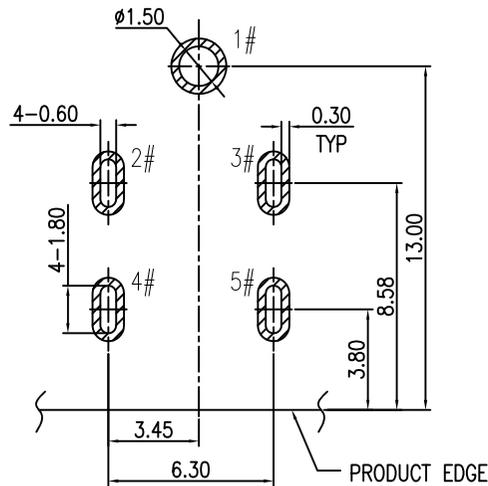




环保物料

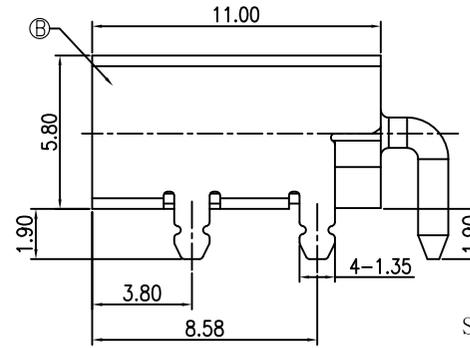

SECTION A-A




RECOMMENDED PCB LAYOUT(T=1.00)  
TOP VIEW TOLERANCE:±0.05

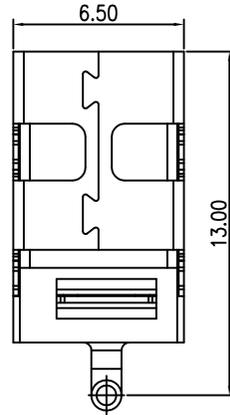


SPECIFICATION:

1. RATING: DC 20V 7A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 13N MIN.
7. DURABILITY: 5,000 CYCLES

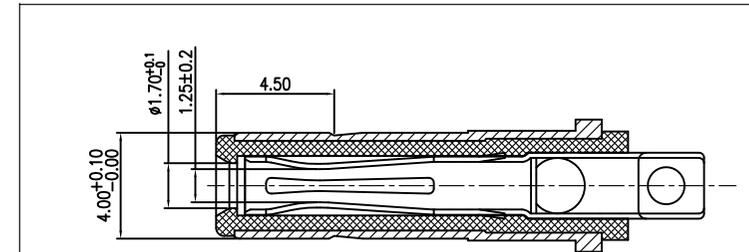

MATING PLUG







SCHEMATIC



NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
D	STOPPER	SUS		1
C	CENTER PIN	BRASS	Sn100u"/Ni 50u"	1
B	SHELL	COPPER ALLOY	Ni 50u"	1
A	HOUSING	PA10T UL 94V-0	BLACK	1

一般公差 GENERAL TOLERANCE					绘图 DR.	料号 PART NO.		文件编号 NUMBER		 TERMINAL&CONNECTORS		
X.X	±0.30	X'	±2'	校核 CHK.	W-DC-CH288-K15	ENDPT01						
X.XX	±0.20	X.X'	±1'	审核 CHK.	品名 TITLE		Φ4.0板上型 DC POWER JACK		比例 SCALE	SHEET	版次 REV.	
X.XXX	±0.10	▲ MAJOR DIM.		核准 APPD.	杨章雄		杨章雄		1/1	1/1	A1	
A1	21.09.26	更新图框发行	董东平	杨章雄	李兴泽							
A0	19.11.15	新图面发行	李兴泽	杨章雄	董东平							
版次 REV	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT							

# 环保物料

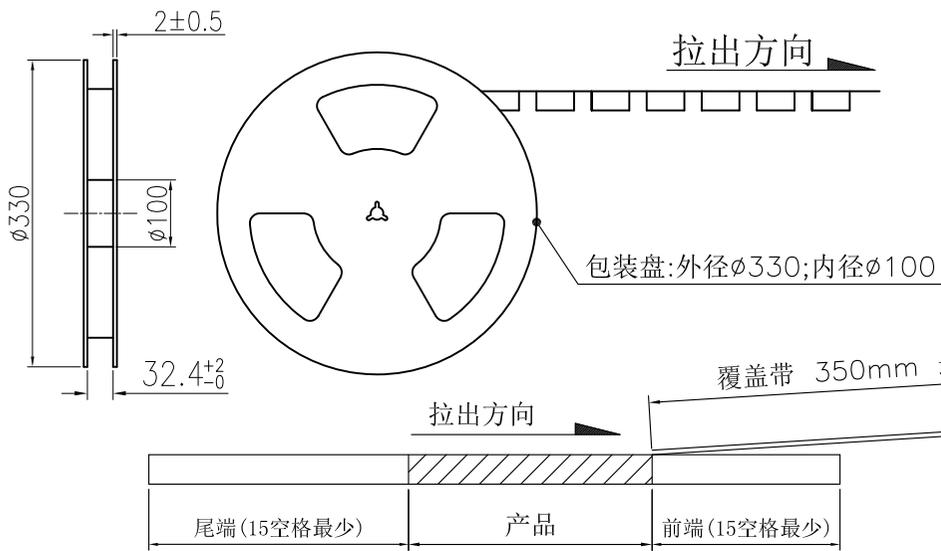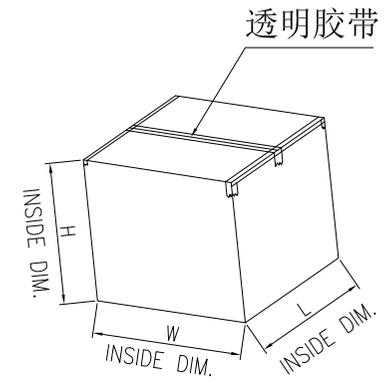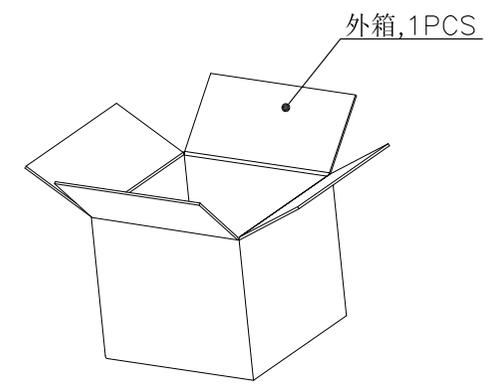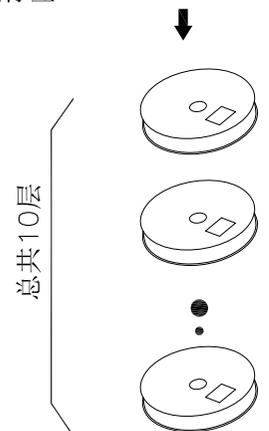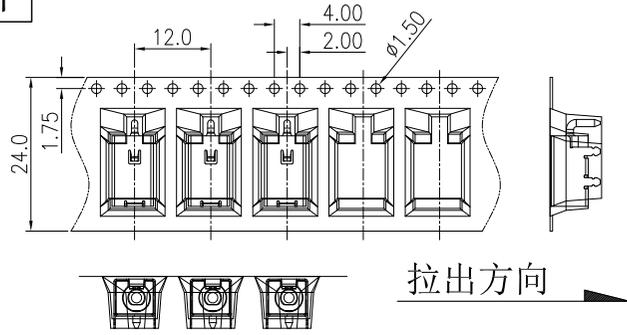

- 备注:
- 材料规格:
    - 1.1 载带: T=0.50mm, 黑色
    - 1.2 包装盘: 蓝色
    - 1.3 纸箱: L=335, W=335, H=380
  - 包装数量:
    - 600PCS/卷, 10卷(6000PCS)/箱
  - 上盖带拔离力: 0.1N~0.7N(10~70gf);  
拔离角度: 165°~180°;  
拔离速度: 300mm/分钟.

					一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS		
					X.X ±0.30	X* ±2*	校对 CHK.		W-DC-CH288-K15	ENDPT01			
					X.XX ±0.20	X.X* ±1*	审核 CHK.		品名 TITLE		比例 SCALE	SHEET	版次 REV.
					X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		Φ4.0板上型 DC POWER JACK		1/1	1/1	A1
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm							