

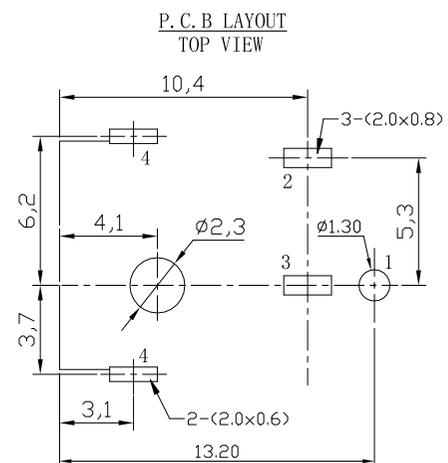
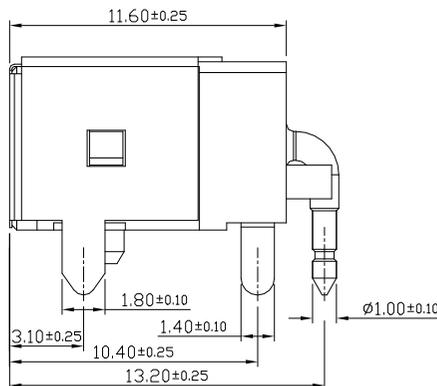
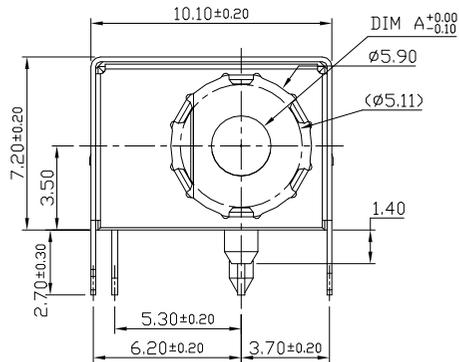
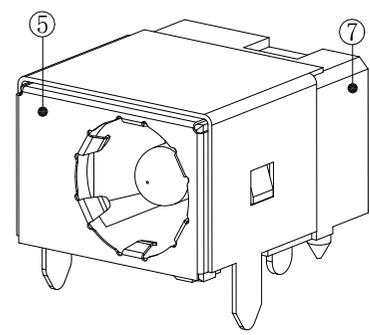
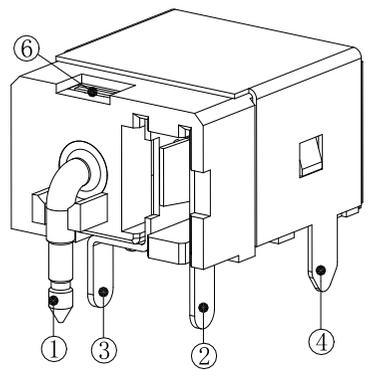
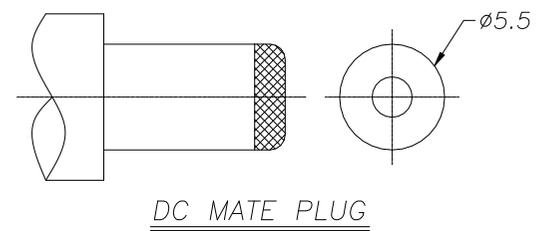



环保物料



SPECIFICATION
 1. Rating : DC 24V 7.0A;
 2. Contact resistance: ≤0.03Ω;
 3. Insulation resistance: ≥100MΩ (DC250V);
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 5-25N;
 6. life test: 5,000 cycles.



SCHMATIC



料号	DIM A
W-DC-CH350-K20	2.00
W-DC-CH350-K25	2.50

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	HOUSING	1	LCP/PA9T	
6	STOPPER	1	SUS301	
5	COVER	1	SUS301	
4	SHELL	1	COPPER ALLOY	Ni-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
2	SPRING PIECE	1	COPPER ALLOY	Ag-Plating
1	PIN	1	BRASS	Ni-Plating

一般公差 GENERAL TOLERANCE
 X.X ±0.30 X* ±2*
 X.XX ±0.20 X.X* ±1*
 X.XXX ±0.10 ▲ MAJOR DIM.

绘图 DR. 李兴泽
 校对 CHK. 赵立
 审核 CHK. 杨章雄
 核准 APPD.

JCTC® 胜蓝科技股份有限公司
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司
 品名 TITLE
 Φ5.5卧式 H=7.20 DC POWER JACK

料号 PART NO.
 W-DC-CH350-KXX
 文件编号 NUMBER
 ENDPT01
 比例 SCALE 1/1
 SHEET 1/1
 版次 REV. A0

版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A0	19.11.15	新图面发行	李兴泽	杨章雄

