
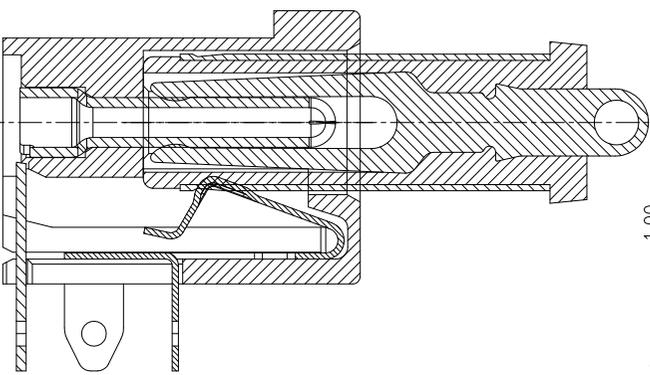
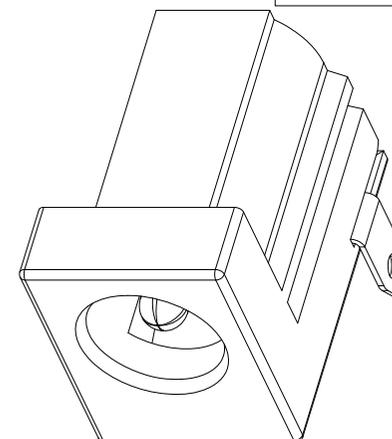
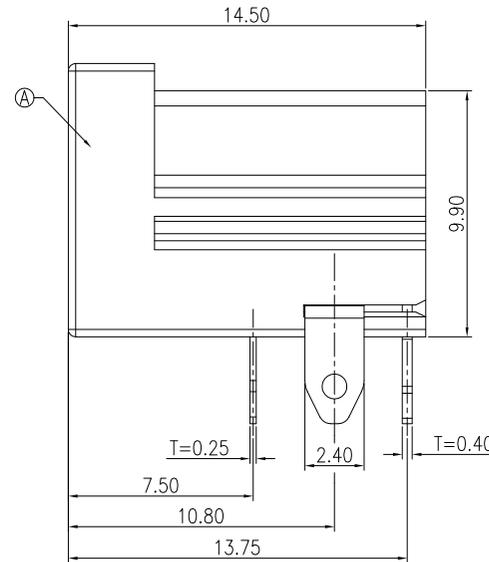
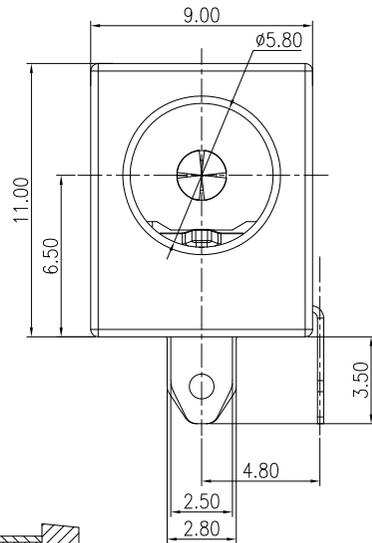



环保物料

检验规范


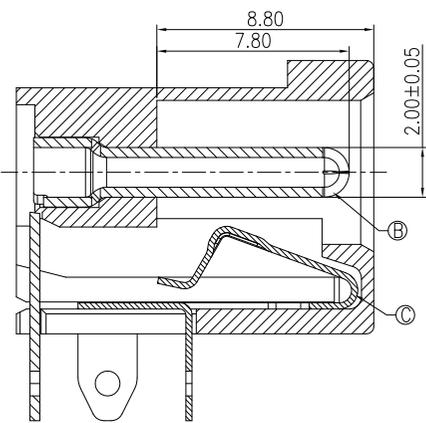


SPECIFICATION:

1. RATING: DC 35V 7A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 40N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

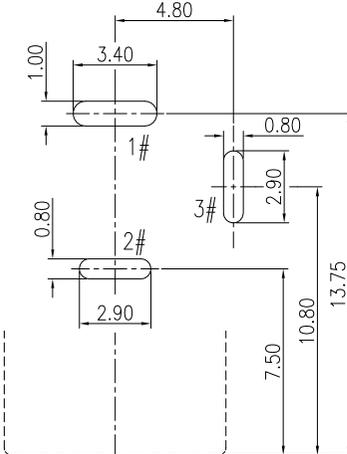

RECOMMENDED PCB LAYOUT  
TOP VIEW TOLERANCE: ±0.05

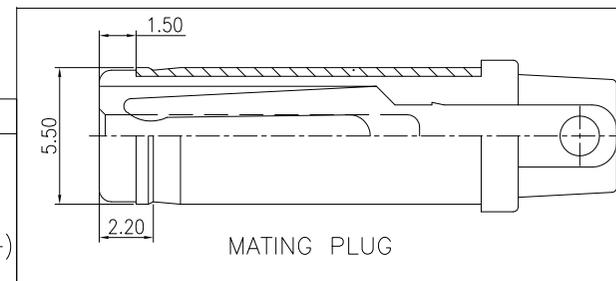


NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
C	SPRING	COPPER ALLOY	Sn80u"/Ni 40u"	1
B	CENTER PIN	BRASS	Sn80u"/Ni 40u"	1
A	HOUSING	PBT	BLACK	1


版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	一般公差 GENERAL TOLERANCE	绘图 DR.	料号 PART NO.	文件编号 NUMBER	JCTC® TERMINAL&CONNECTORS		
A1	21.07.15	更新图框发行	董东平	杨章雄	mm	X.X ±0.30 X.XX ±0.20 X.XXX ±0.10	李兴泽	W-DC-CH650-023	ENDPT01	比例 SCALE	SHEET	版次 REV.
A0	18.08.28	新图面发行	李兴泽	杨章雄		X' ±2' X.X' ±1' ▲ MAJOR DIM.	董东平	品名 TITLE		1/1	1/1	A1
							杨章雄	Φ5.5 H11.0卧式 DC POWER JACK				

环保物料

检验规范

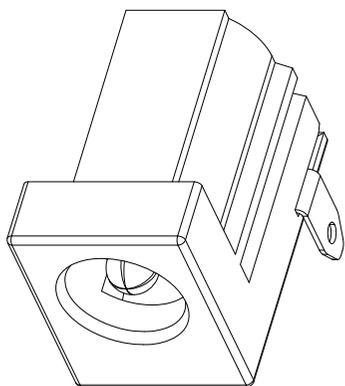


DC JACK

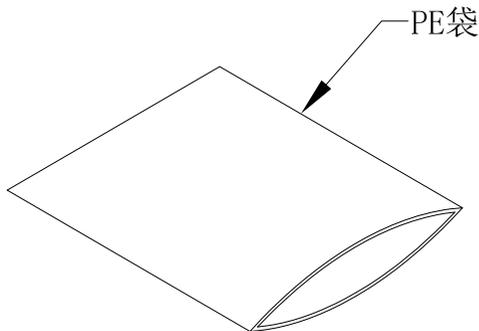

PE袋

500PCS/袋

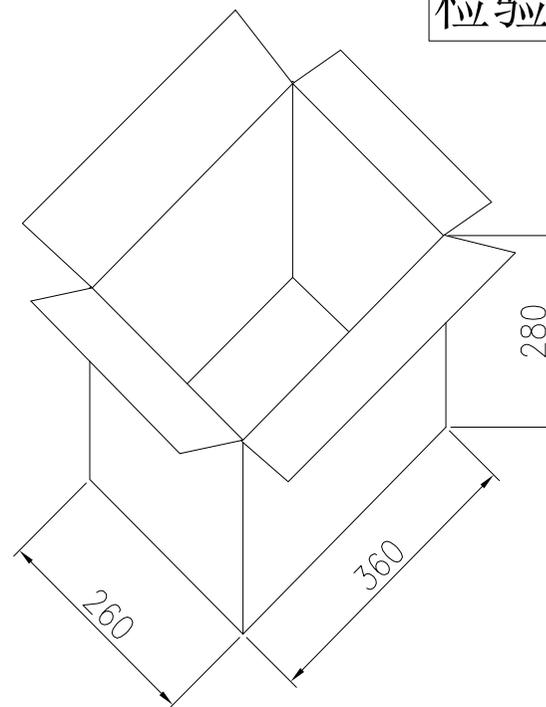

8000PCS/16袋/箱

备注:

- 1. 材料规格:  
纸箱: L=360, W=260, H=280
- 2. 包装数量:  
500PCS/袋, 8000PCS/箱

				一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER		 TERMINAL&CONNECTORS				
				X.X ±0.30	X* ±2*	校对 CHK.		W-DC-CH650-023		ENDPT01						
				X.XX ±0.20	X.X* ±1*	审核 CHK.		品名 TITLE				比例 SCALE	SHEET	版次 REV.		
				X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.									Φ5.5 H11.0卧式 DC POWER JACK	
A0	21.07.15	新图面发行	董东平	杨章雄	单位 UNIT	mm		核准 APPD.								
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.												