
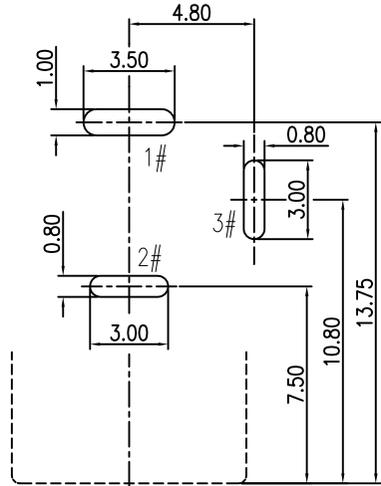
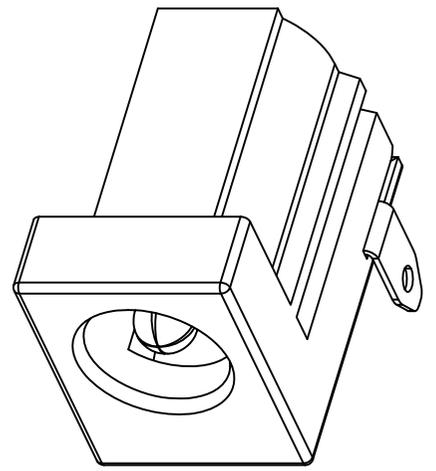
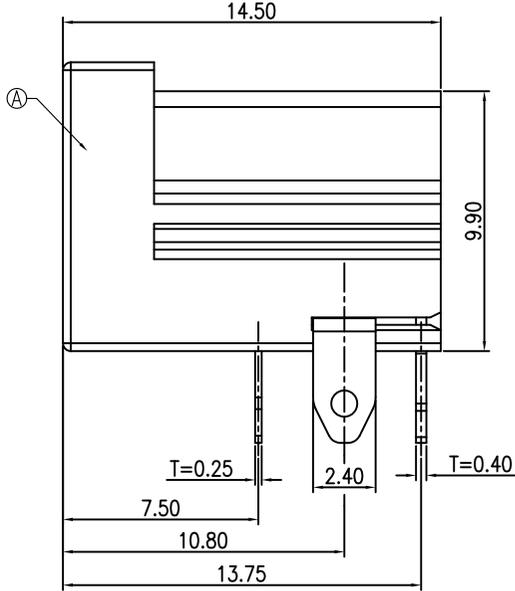
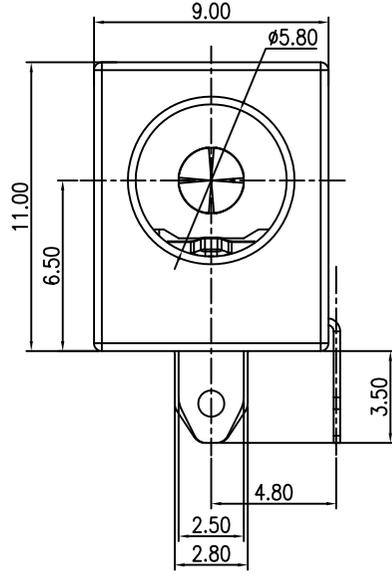


环保物料

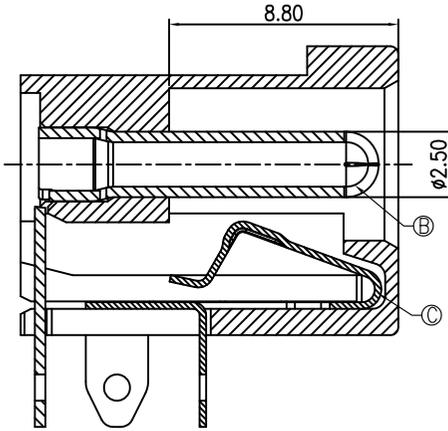

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

SPECIFICATION:


1. RATING: DC 35V 4A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 40N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

SCHEMATIC		<p>MATING PLUG</p>		
	1#(+)			
	2#/3#(-)			
C	SPRING	COPPER ALLOY	Sn80u"/Ni 40u"	1
B	CENTER PIN	BRASS	Sn80u"/Ni 40u"	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY


一般公差 GENERAL TOLERANCE					绘图 DR.	李兴泽	料号 PART NO.		文件编号 NUMBER		<p>TERMINAL&CONNECTORS</p>	
X.X	±0.30	X*	±2*	校对	董东平	W-DC-CH650-024		ENDPT01				
X.XX	±0.20	X.X*	±1*	审核	董东平	品名 TITLE		Φ5.5 H11.0卧式 DC POWER JACK		比例 SCALE	SHEET	版次 REV.
X.XXX	±0.10	▲ MAJOR DIM.		核准	杨章雄					1/1	1/1	A1
单位 UNIT	mm			核准 APPD.								

版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A1	21.07.21	更新图框发行	董东平	杨章雄
A0	18.09.04	换图框发行	李兴泽	杨章雄


环保物料




DC JACK




500pcs/袋



小纸盒 (500pcs)=1 盒

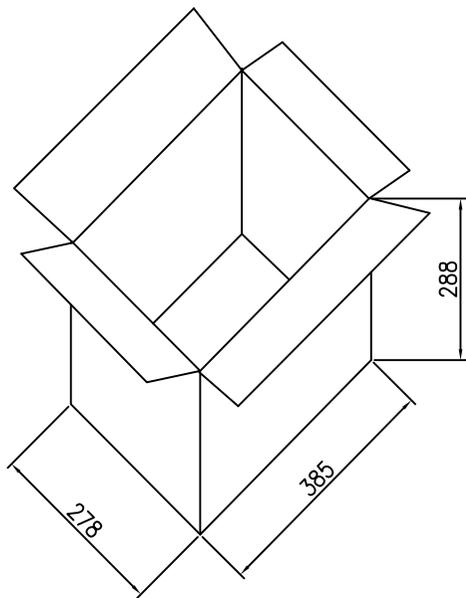

6000PCS/12盒/箱

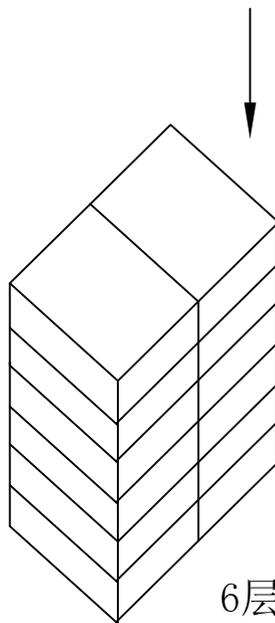

6层共12盒

备注:

1. 材料规格:
 - 1.1 小盒: L=260, W=190, H=44
 - 1.3 纸箱: L=385, W=278, H=288
2. 包装数量:
 - 500PCS/盒, 6000PCS/箱

						一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS	
						X.X ±0.30	X* ±2*	校对 CHK.		W-DC-CH650-024	ENDPT01		
						X.XX ±0.20	X.X* ±1*	审核 CHK.		品名 TITLE		比例 SCALE	
						X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		DC POWER JACK		SHEET	
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm				DC POWER JACK		1/1	版次 REV.
A1	21.07.21	更新图框发行	董东平	杨章雄						DC POWER JACK		1/1	A1
A0	18.09.04	换图框发行	李兴泽	杨章雄						DC POWER JACK		1/1	A1