
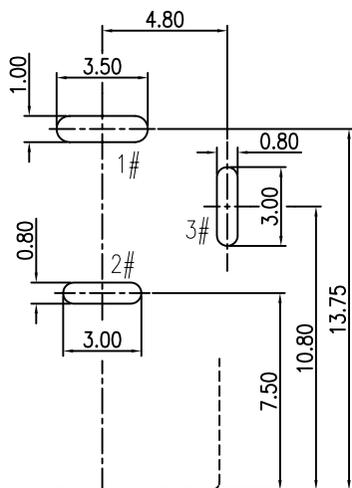
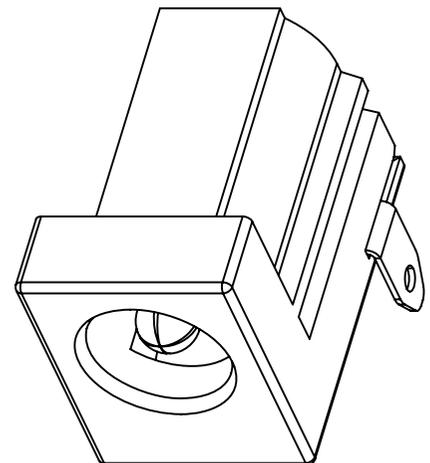
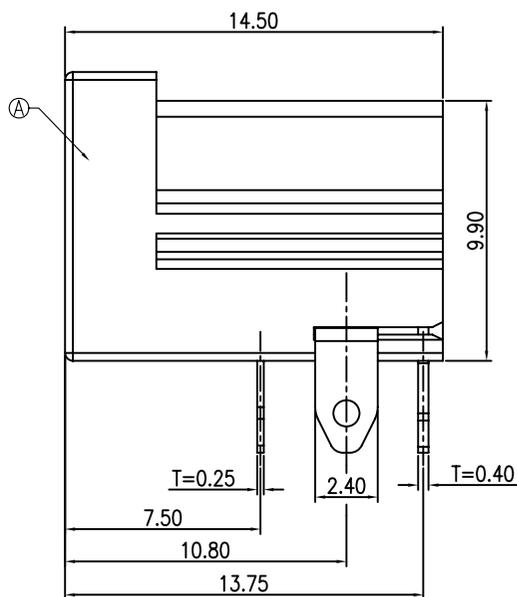
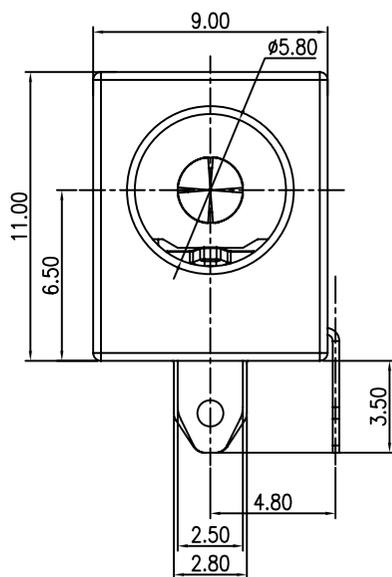


环保物料

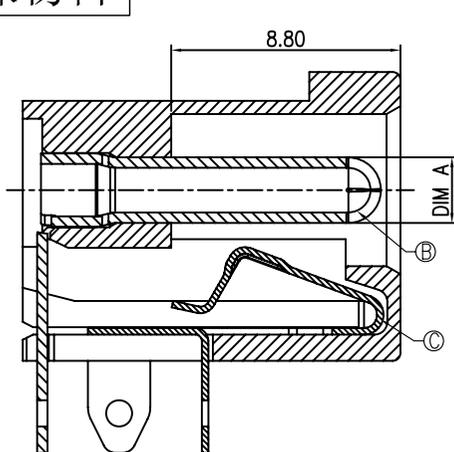


RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

P/N.	DIM A
W-DC-CH650-A200	φ2.00
W-DC-CH650-A250	φ2.50

SPECIFICATION:

1. RATING: DC 35V 7A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 40N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

SCHEMATIC	
	1#(+)
	2#/3#(-)

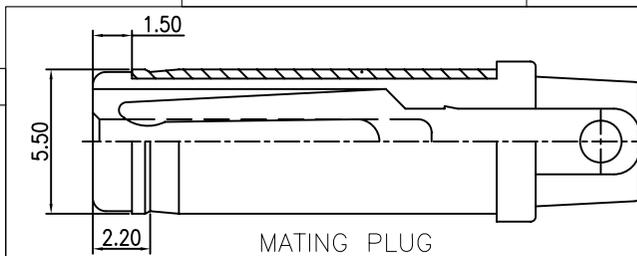

C	SPRING	COPPER ALLOY	Sn80u"/Ni 40u"	1
B	CENTER PIN	BRASS	Sn80u"/Ni 40u"	1
A	HOUSING	PA10T无卤	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

A0		18.09.04	换图框发行	李兴泽	
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	

一般公差 GENERAL TOLERANCE	
X.X ±0.30	X* ±2*
X.XX ±0.20	X.X* ±1*
X.XXX ±0.10	▲ MAJOR DIM.
单位 UNIT	mm

绘图 DR.	李兴泽
校对 CHK.	
审核 CHK.	
核准 APPD.	

JGTC 胜蓝科技股份有限公司
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司

品名 TITLE
 Φ5.5 H11.0卧式 DC POWER JACK

料号 PART NO.		W-DC-CH650-Axx	
文件编号 NUMBER		ENDPT01	
比例 SCALE	SHEET	版次 REV.	
1/1	1/1	A0	