环保物料

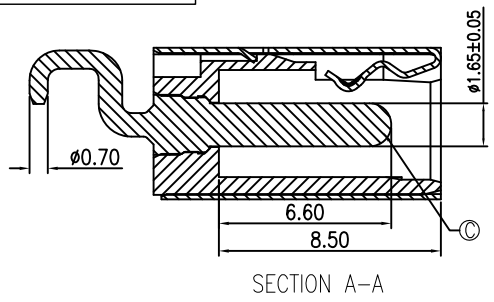

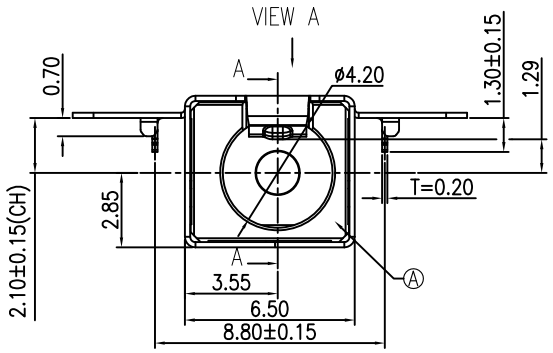

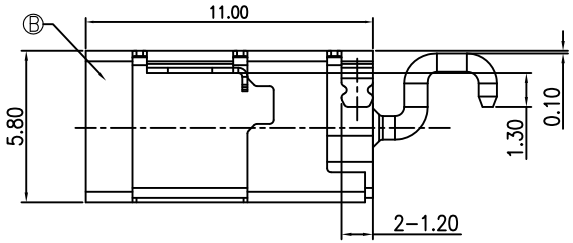



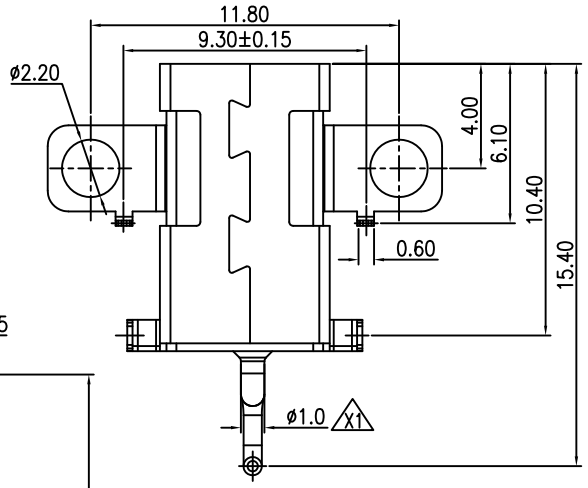

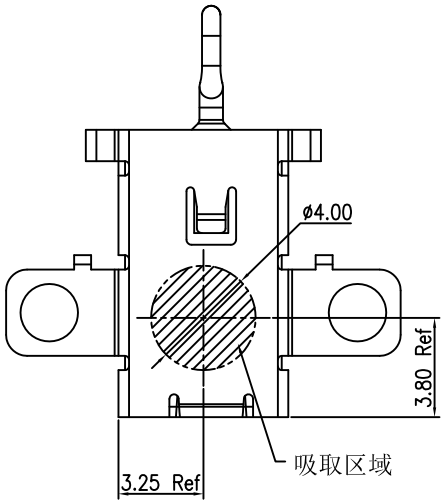

VIEW A

SPECIFICATION:

1. RATING: DC 20V 5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE:40N MAX.
6. EXTRACTION FORCE:3N MIN.
7. DURABILITY: 5,000 CYCLES

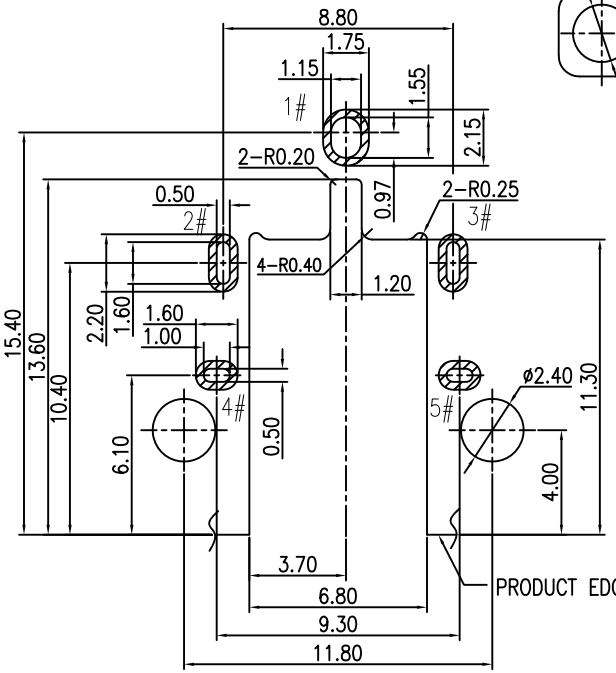

RECOMMENDED PCB LAYOUT(t=1.00)

TOP VIEW TOLERANCE:±0.05

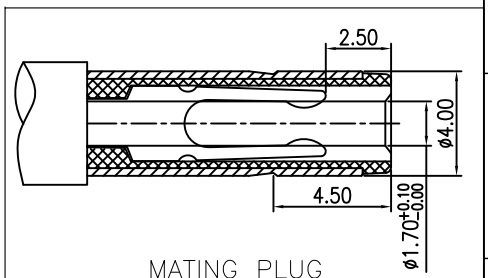

MATING PLUG

SCHEMATIC



NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
C	CENTER PIN	BRASS	Sn100u"/Ni 50u"	1
B	SHELL	C5210-EH	Ni 50u"	1
A	HOUSING	PA10T	BLACK	1

版次REV.	日 期 DATE	变 更 内 容 DESCRIPTION	审 核 CHK.	核 准 APPD.
A3	21.07.21	更新图框发行	董东平	杨章雄
A2	18.12.20	新增尺寸管控	李兴泽	杨章雄
A1	18.12.18	中心针根部直径加大 X1	李兴泽	杨章雄
A0	18.07.27	换图框发行	李兴泽	杨章雄

一般公差GENERAL TOLERANCE

X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
X° ±2°
X.X° ±1°
▲ MAJOR DIM.

单位UNIT mm

绘 图 DR.	李兴泽
校 对 CHK.	董东平
审 核 CHK.	董东平
核 准 APPD.	杨章雄

料号 PART NO. W-DC-CHF210-009

文件编号 NUMBER ENDPT01

品名TITLE Φ4.0沉板式(CH=-2.10) DC POWER JACK

JCTC®

TERMINAL&CONNECTORS

比例SCALE	SHEET	版次 REV.
1/1	1/1	A3

环保物料

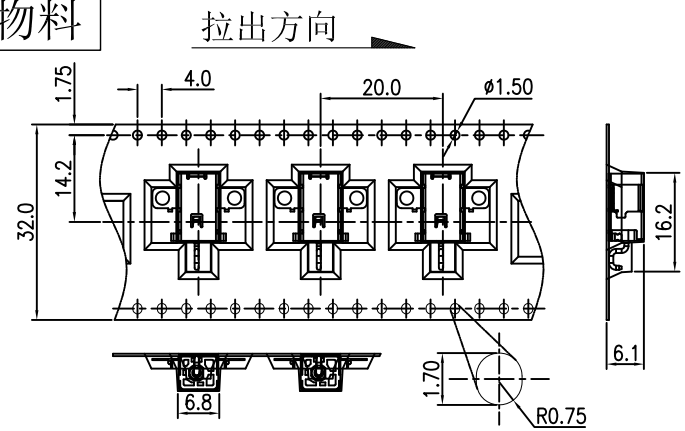

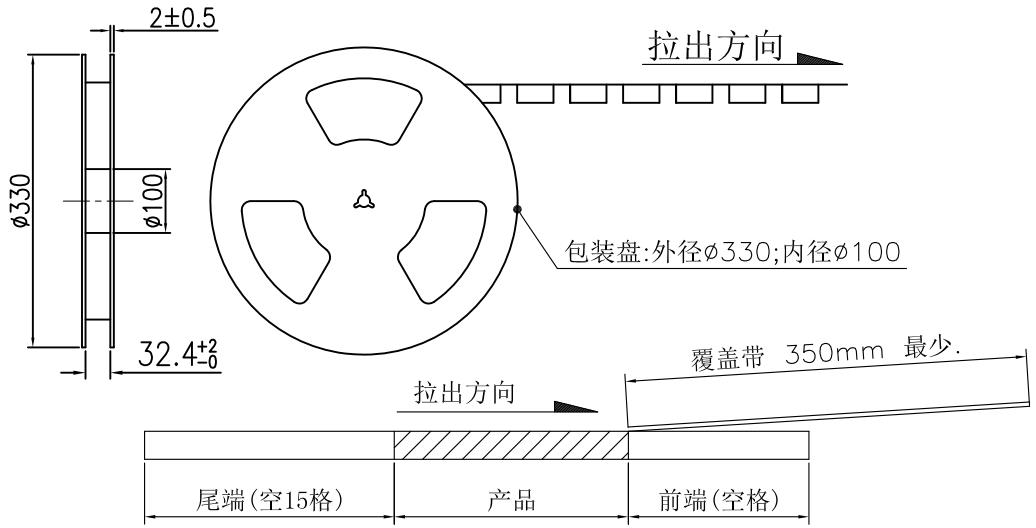

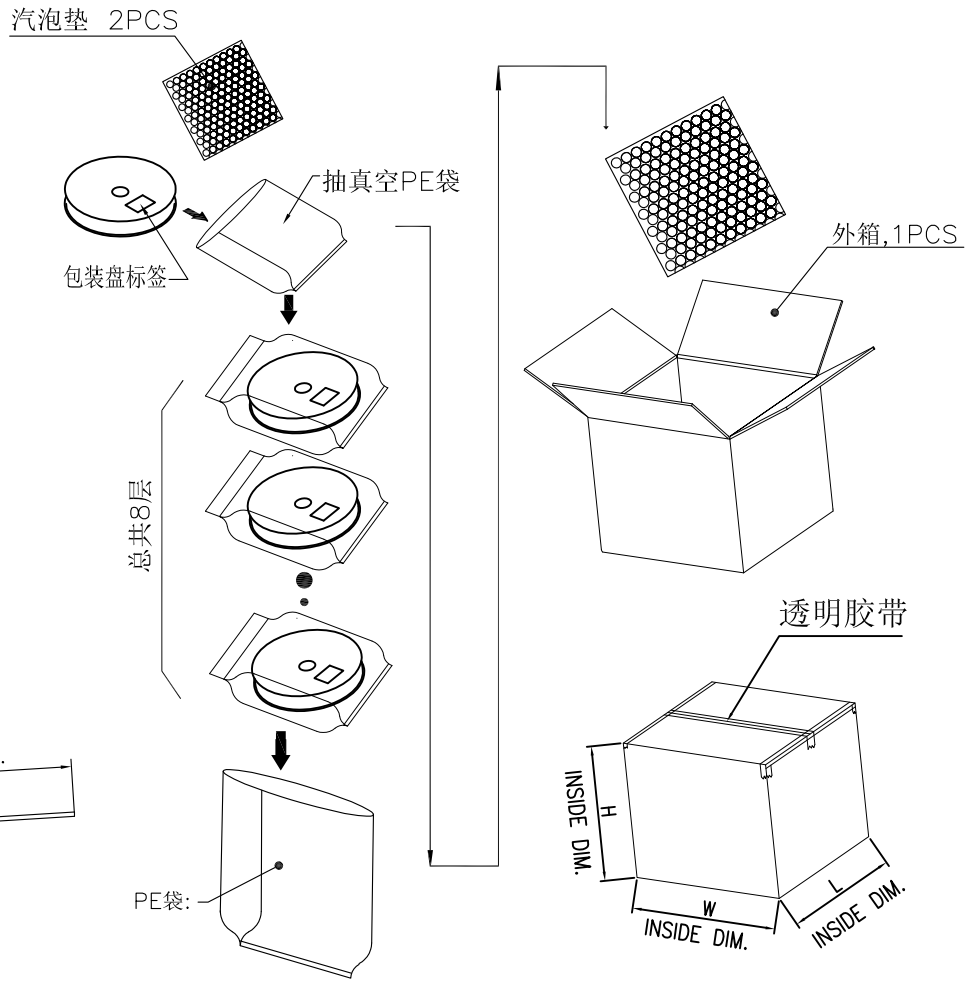

备注:

1. 材料规格:
   1.1 载带:T=0.50mm,黑色
   1.2 包装盘:蓝色
   1.3 纸箱: L=335,W=335,H=380
2. 包装数量:
   500PCS/卷, 10卷(5000PCS)/箱
3. 上盖带拔离力: 0.1N~0.7N(10~70gf);
   拔离角度: 165°~180°;
   拔离速度: 300mm/分钟.

版次REV.	日 期 DATE	变 更 内 容 DESCRIPTION	审 核 CHK.	核 准 APPD.
A2	21.07.21	更新图框发行	董东平	杨章雄
A1	19.09.23	更新产品包装方向	李兴泽	杨章雄
A0	18.07.27	换图框发行	李兴泽	杨章雄

一般公差 GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
X° ±2°
X.X° ±1°
▲ MAJOR DIM.
单位UNIT mm

绘 图 DR.	李兴泽
校 对 CHK.	
审 核 CHK.	
核 准 APPD.	

料号 PART NO. W-DC-CHF210-009

文件编号 NUMBER ENDPT01

品名TITLE Φ4.0沉板式(CH=-2.10) DC POWER JACK

JCTC®
TERMINAL&CONNECTORS

比例SCALE	SHEET	版次 REV.
1/1	1/1	A2