


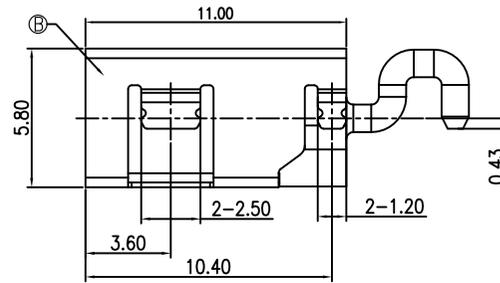
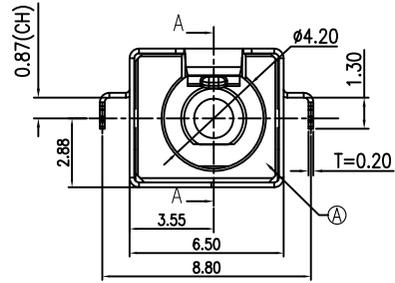


环保物料


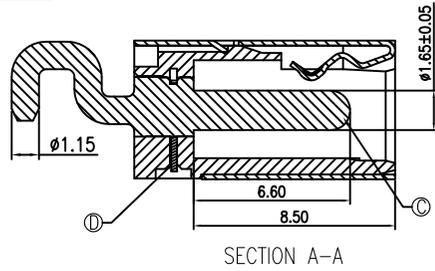


SPECIFICATION:

1. RATING: DC 20V 7A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 40N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

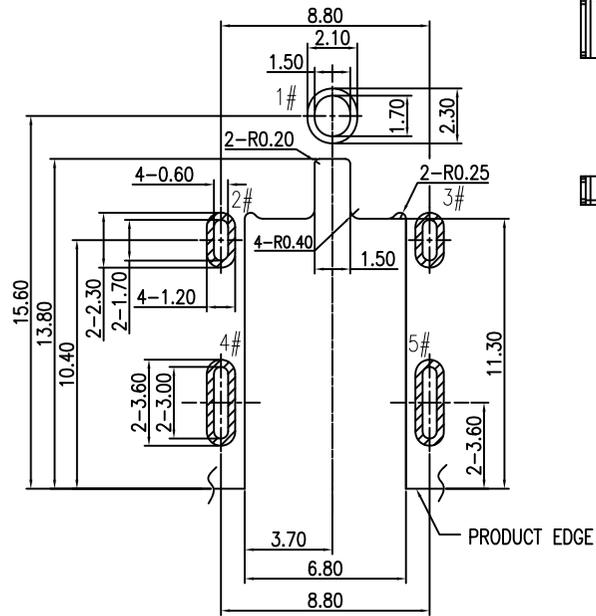

RECOMMENDED PCB LAYOUT(t=1.00)
TOP VIEW TOLERANCE:±0.05

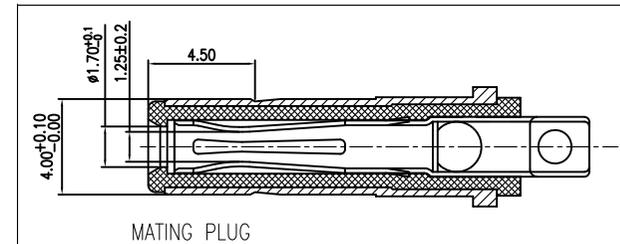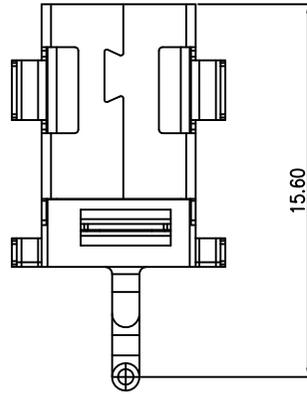


SCHEMATIC	D	STOPPER	SUS		1
○ 1# (+)	C	CENTER PIN	BRASS	Sn100u"/Ni 50u"	1
∧ 2#/3#4#/5# (-)	B	SHELL	COPPER ALLOY	Ni 50u"	1
	A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
	no.	DESCRIPTION	MATERIAL	REMARKS	QTY

一般公差 GENERAL TOLERANCE				
X.X	±0.30	X*	±2*	
X.XX	±0.20	X.X*	±1*	
X.XXX	±0.10	▲ MAJOR DIM.		
单位 UNIT	mm			

绘图 DR.	李兴泽	料号 PART NO.	W-DC-FH087-E08	文件编号 NUMBER	ENDPT01	 TERMINAL&CONNECTORS
校对 CHK.	董东平	品名 TITLE	Φ 4.0沉板式 (CH=-0.87) DC POWER JACK	比例 SCALE	1/1	
审核 CHK.	董东平	核次 REV.	A1	SHEET	1/1	
核准 APPD.	杨章雄					


环保物料

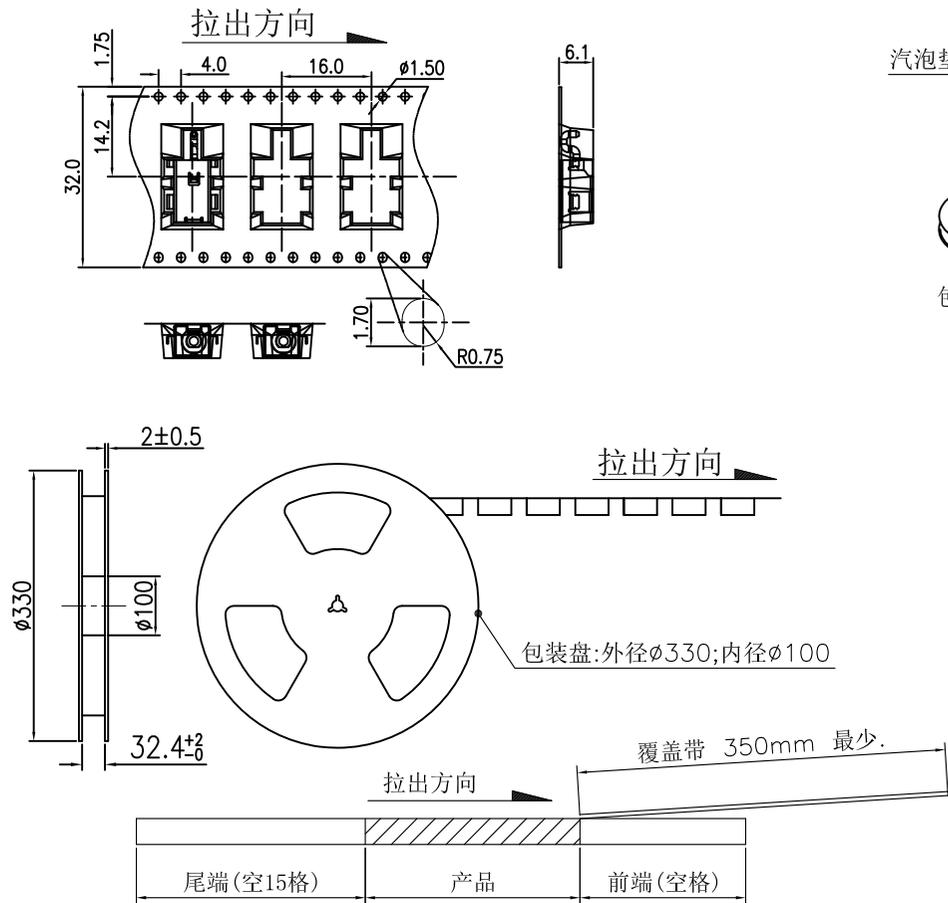

备注:

- 材料规格:
 - 载带: $T=0.50\text{mm}$, 黑色
 - 包装盘: 蓝色
 - 纸箱: $L=335, W=335, H=380$
- 包装数量:

600PCS/卷, 10卷(6000PCS)/箱
- 上盖带剥离力: $0.1\text{N} \sim 0.7\text{N}$ (10~70gf);
 剥离角度: $165^\circ \sim 180^\circ$;
 剥离速度: 300mm/分钟.

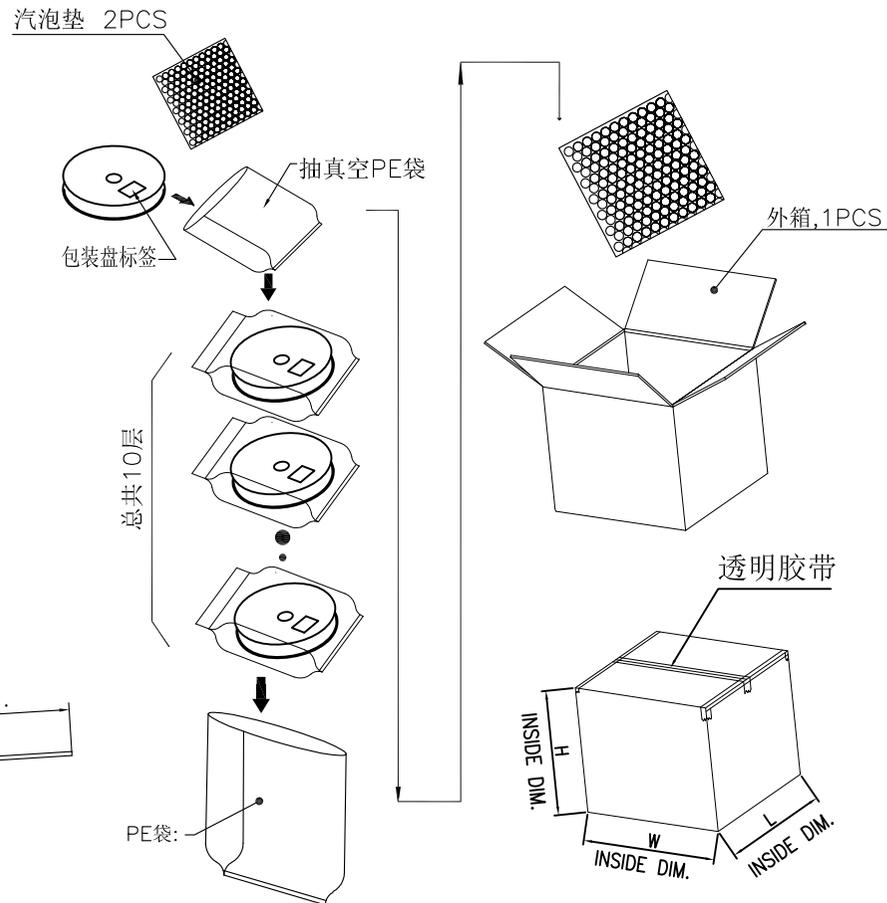

					一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS			
					X.X ±0.30	X* ±2*	校对 CHK.	董东平	W-DC-FH087-E08	ENDPT01				
					X.XX ±0.20	X.X* ±1*	审核 CHK.	董东平	品名 TITLE			比例 SCALE	SHEET	版次 REV.
					X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.	杨章雄	Φ 4.0 沉板式 (CH=-0.87) DC POWER JACK			1/1	1/1	A1
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm								