
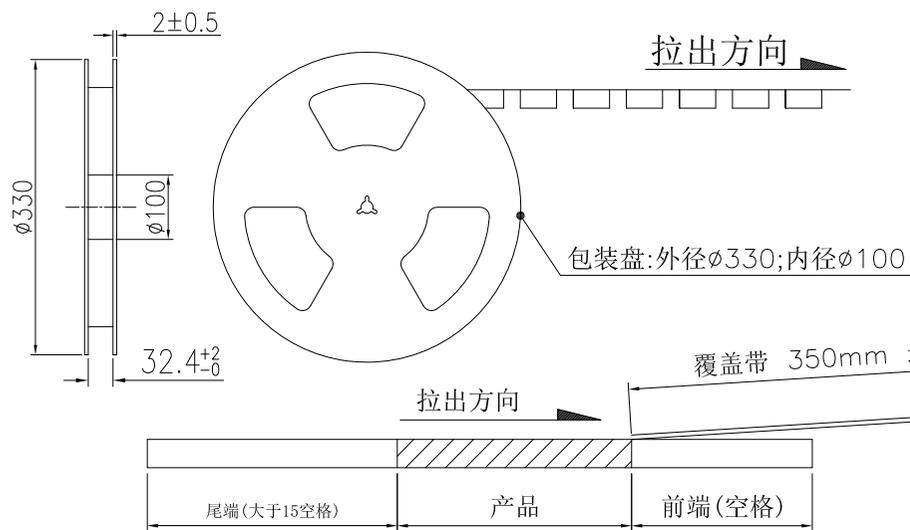



环保物料

检验规范

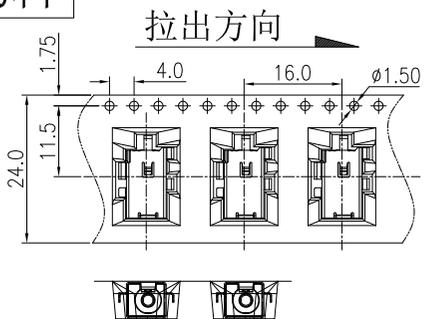

备注:

1. 材料规格:
 - 1.1 载带:T=0.50mm,黑色
 - 1.2 包装盘:蓝色
 - 1.3 纸箱: L=335,W=335,H=380
2. 包装数量:
 - 600PCS/卷, 10卷(6000PCS)/箱
3. 上盖带拨离力: 0.1N~0.7N(10~70gf);
 - 拨离角度: 165°~180°;
 - 拨离速度: 300mm/分钟.

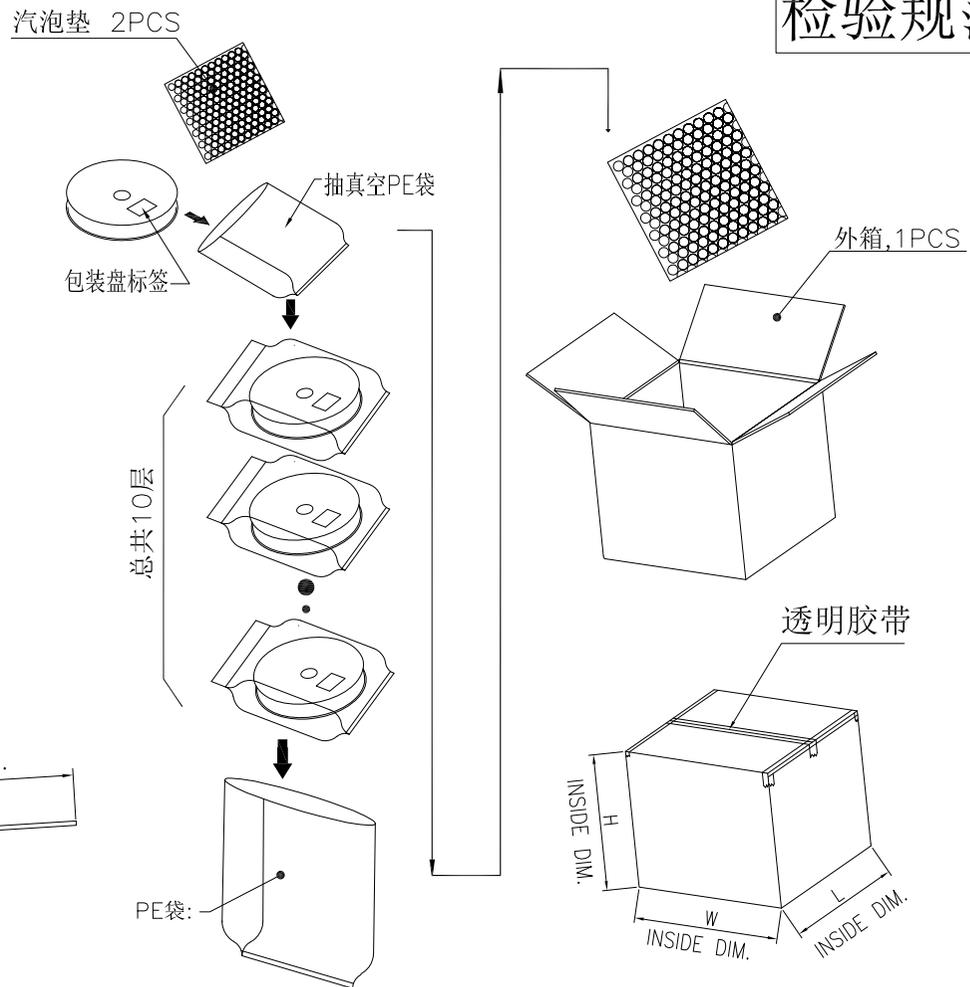

					一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	 TERMINAL & CONNECTORS			
					X.X ±0.30	X' ±2'	校对 CHK.		W-DC-FH100-R18	ENDPT01				
					X.XX ±0.20	X.X' ±1'	审核 CHK.		品名 TITLE			比例 SCALE	SHEET	版次 REV.
					X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		Φ4.0 沉板式 (CH=-1.0)			1/1	1/1	A1
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm	 		DC POWER JACK-包装图					