
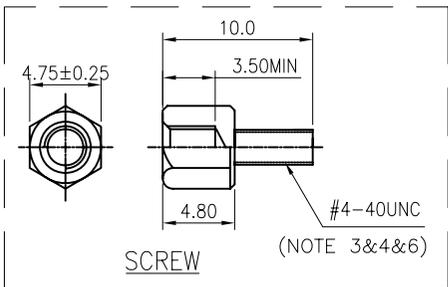
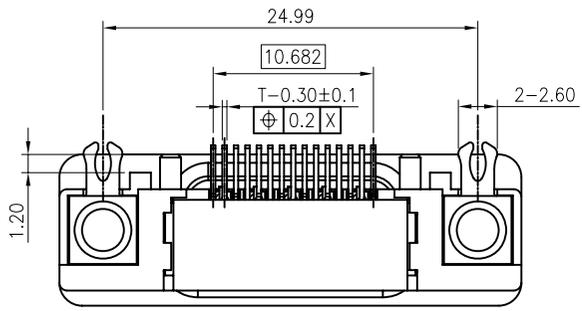



RECOMMENDED P.C.B LAYOUT  
P.B.C THICKNESS: 1.20mm,  
GENERAL TOLERANCE: ±0.05mm

- NOTE:
- MATERIAL:
    - HOUSING: PA9T UL 94V-0, COLOR:BLUE
    - CONTACTS: BRASS
    - SHELL: SPCC
    - SCREW: SPCC
    - BOARD LOCK: SPCC
    - RIVET: COPPER ALLOY OR SPCC
  - FINISH:
    - CONTACTS: GOLD (SEE TABLE) PLATED IN CONTACT AREA  
100u" MATTE-TIN PLATED IN SOLDER AREA  
50u" MIN.NICKEL UNDERPLATED OVERALL
    - SHELL: 50u" MIN.NICKEL PLATED
    - SCREW: 50u" MIN.NICKEL PLATED
    - BOARD LOCK:100u" MIN.TIN PLATED OVER  
50u" MIN.NICKEL UNDERPLATED OVERALL
    - RIVET: 50u" MIN.NICKEL PLATED
  - THE SCREW INTERNAL AND EXTERNAL THREADS TO WITHSTAND A MINIMUM APPLIED TORQUE OF 4.0 kgf.cm.
  - THE SCREW MINIMUM REMOVAL TORQUE OF 1.0 kgf.cm.
  - THE NUT INTERNAL THREADS TO WITHSTAND A MINIMUM APPLIED TORQUE OF 4.0 kgf.cm.
  - RECOMMENDED SCREW MOUNTING HARDWARE LESS THAN OR EQUAL TO NOTE 3&4&5 SPEC.
  - ELECTRICAL
    - Operation voltage: 250V Max.
    - Current rating: 2.5 Amps Max.
    - Contact resistance: 25 mohms initial
    - Insulation resistance: 3000 Mohms min @ 500 VDC
    - Dielectric withstanding voltage: 500 VAC / minute
    - Temperature range: -55°C TO +85°C
    - Mating cycles: 5000 insertions

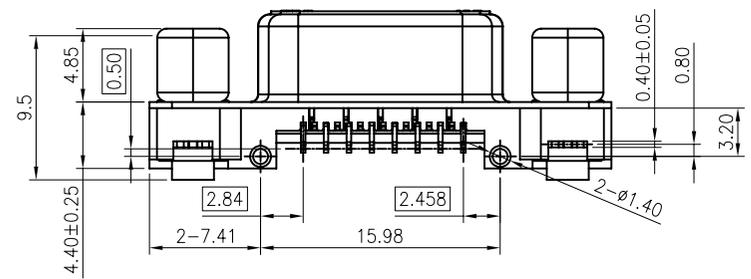

RoHS2+HF	15u"	W-DSU-15PG-E38
	G/F	W-DSU-15PG-A38
GP TYPE	MIN. GOLD THICKNESS	PART NUMBER

				一般公差 GENERAL TOLERANCE		CUSTOMER DRAWING		Fuconn Industrial Electronics Limited			料号 PART NO. W-DSU-15PG-X38	
				X.X ±0.25	X' ±5'	绘图 DR. 李兴泽		品名 TITLE D-SUB 15PIN FEMALE (FRONT 7BACK 8) H=10.00m CH=3.8mm, REC RA DIP TYPE			文件编号 NUMBER C-HE95	
				X.XX ±0.15	X.X' ±2'	审核 CHK.					比例 SCALE 1/1	
				X.XXX ±0.08	▲ MAJOR DIM.	核准 APPD.					版次 REV. A0	
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT mm						版次 REV. A0	

A

B

C

D

E

F

1

2

3


4

5


6

7

紙板1PCS




成品(100PCS/盒)  
10\*2=20盒




用拉伸膜捆扎

紙板1PCS



紙箱1PCS

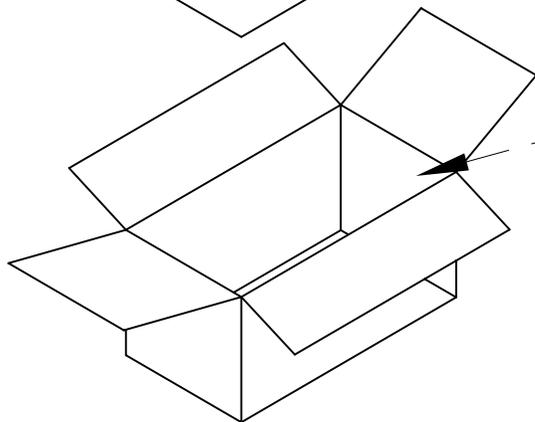

包裝方式：

紙箱尺寸:47\*35.5\*17CM

100	20	2000 PCS	--KG	--KG
PCS/ TRAY	TRAYS/ CARTON	QUANTITY	GROSS WEIGHT	WEIGHT

8

一般公差 GENERAL TOLERANCE

CUSTOMER DRAWING

X.X ±0.25

X' ±5'

绘图 DR. 李兴泽

Fuconn Industrial Electronics Limited

料号 PART NO.

W-DSU-15PG-X38

X.XX ±0.15

X.X' ±2'

审核 CHK.

品名 TITLE

文件编号 NUMBER C-HE95

X.XXX ±0.08

▲ MAJOR DIM.

核准 APPD.

D-SUB 15PIN FEMALE (FRONT 7BACK 8)  
H=10.00m CH=3.8mm, REC RA DIP TYPE

比例 SCALE

SHEET

版次 REV.

A0	2021.04.25	换图框发行	李兴泽		
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	

单位 UNIT

mm



1/1

1/1

A0

A

B

C

D

E

F