
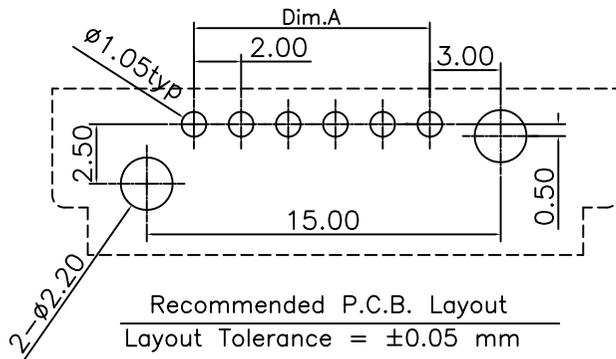
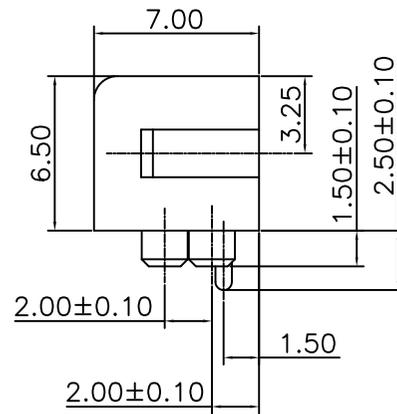
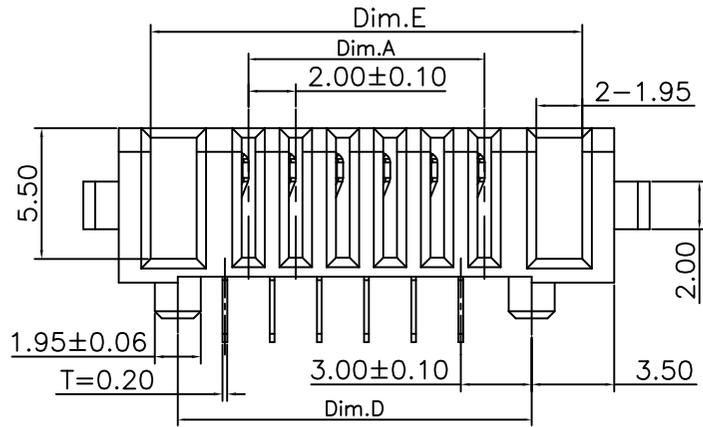


环保物料

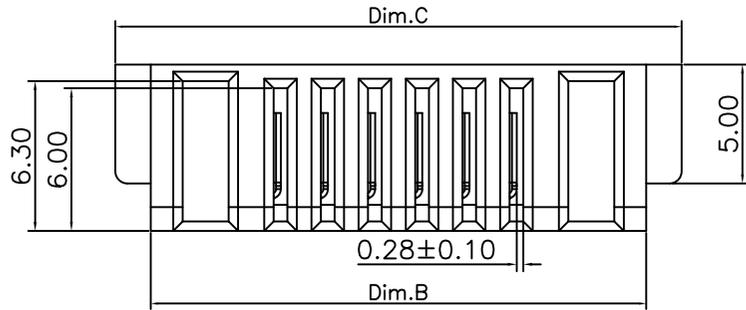

MATERIAL
 INSULATOR : NYLON 9T (UL94V-0)
 CONTACT : C5191-H
 CONTACT PLATED : Contact area: nickel 100u"~200u"
 SPECIFICATION:
 CURRENT RATING : 7A
 INSTANT CURRENT : 10A
 CONTACT RESISTANCE : 30mΩ
 INSULATION RESISTANCE : 100MΩ
 DIELECTRIC VOLTAGE : 500V
 OPERATING TEMPERATURE : -40° C~105° C
 Salt spray test : 96H

P/N.: W-F200-XP-80F

PIN NUMBER:
 02: 2PIN
 03: 3PIN
 ...:
 12: 12PIN

PIN NUMBER	Dim.A	Dim.B	Dim.C	Dim.D	Dim.E
2 PIN	2.00	13.00	16.00	7.00	10.30
3 PIN	4.00	15.00	18.00	9.00	12.30
4 PIN	6.00	17.00	20.00	11.00	14.30
5 PIN	8.00	19.00	22.00	13.00	16.30
6 PIN	10.00	21.00	24.00	15.00	18.30
7 PIN	12.00	23.00	26.00	17.00	20.30
8 PIN	14.00	25.00	28.00	19.00	22.30
9 PIN	16.00	27.00	30.00	21.00	24.30
10 PIN	18.00	29.00	32.00	23.00	26.30
11 PIN	20.00	31.00	34.00	25.00	28.30
12 PIN	22.00	33.00	36.00	27.00	30.30

一般公差 GENERAL TOLERANCE	
X.X ±0.30	X* ±2*
X.XX ±0.20	X.X* ±1*
X.XXX ±0.10	▲ MAJOR DIM.
单位 UNIT	mm

绘图 DR.	李兴泽
校对 CHK.	赵立
审核 CHK.	杨章雄
核准 APPD.	





料号 PART NO.	W-F200-XP-80F
文件编号 NUMBER	ENDPT01
品名 TITLE	2.0 PITCH 电池母座

比例 SCALE	1/1
SHEET	1/1
版次 REV.	A1

JCTC®
 TERMINAL & CONNECTORS

版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A1	21.06.17	变更系列图发行	李兴泽	杨章雄
A0	20.03.15	新图面发行	李兴泽	杨章雄

环保物料

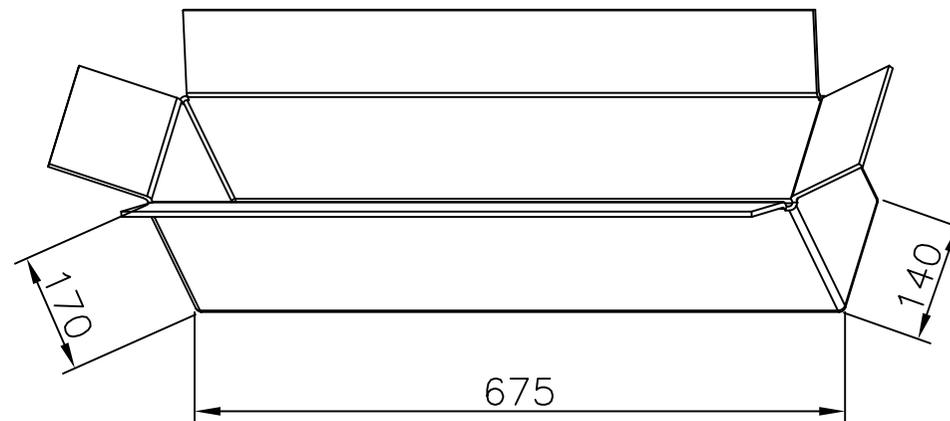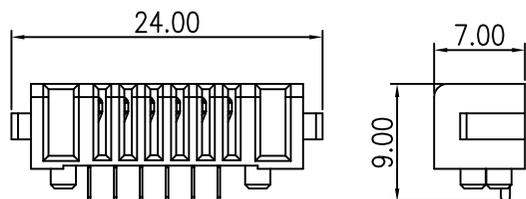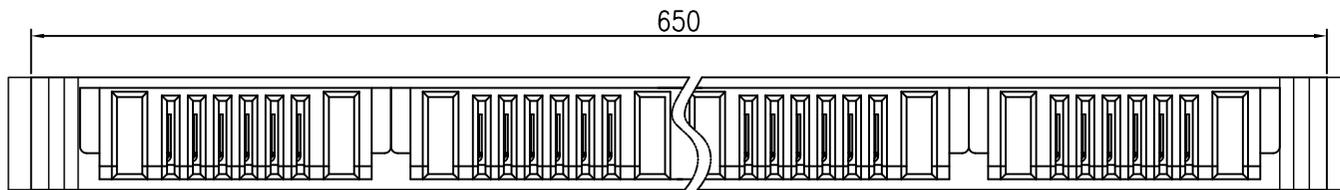

一支管要求包装26pcs(其中一管尾数包装8pcs).
每箱装193支管,共5000pcs.

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS				
A0	换图框发行	2020.03.15		LINEAR	ANGLES	APPROVED			W-F200-6P-80F	ENDE05					
A1	优化包材	2020.11.25	UNIT: MM	0.0±0.25	X° REF±6°	DESIGNER			TITLE 6PIN 2.0 PITCH电池母座			REV	A2	SHEET	1/1
A2	更新包装数量发行	2021.11.20		0.00±0.15	X° ±3°	DRAWN	Li Xing Ze	2021.11.20							
				SIZE: A4	0.000±0.08	X° X' ±2°									