
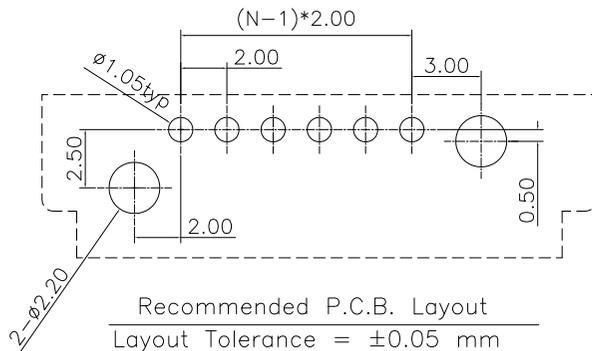
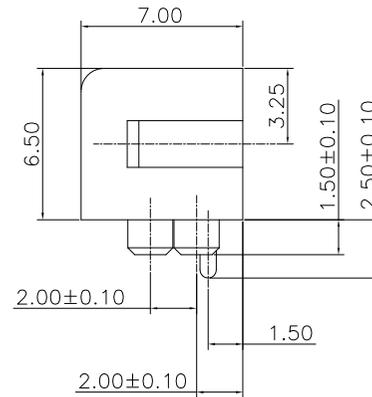
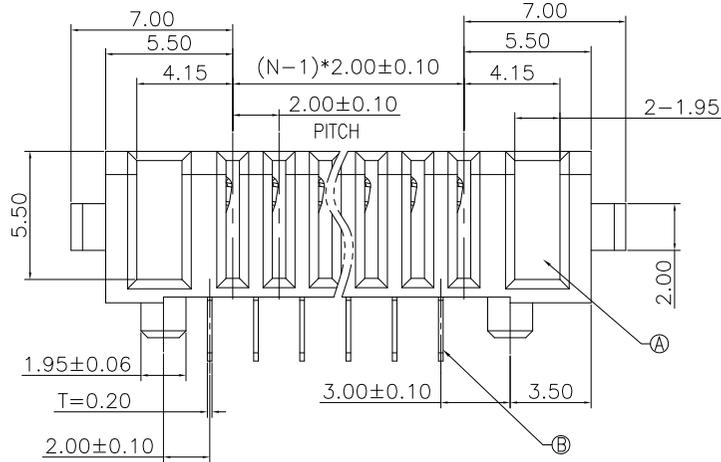


环保物料

SPECIFICATION:
 CURRENT RATING : 7A
 INSTANT CURRENT : 10A
 CONTACT RESISTANCE : 30MΩ MAX.
 INSULATION RESISTANCE : 100MΩ MIN.
 DIELECTRIC VOLTAGE : 500V
 OPERATING TEMPERATURE : -40°C~105°C
 P/N.: W-M200-NP-22D

PIN NUMBER:
 2: 2PIN
 3: 3PIN
 ...:
 12: 12PIN

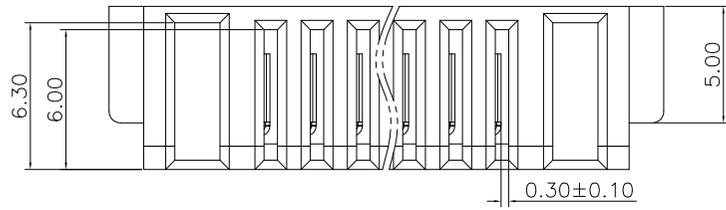

B	TERMINAL	C2680	GOLD FLASH/Ni 50u"	2~12
A	HOUSING	PA9T UL94V-0	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
AO	The new version file were released	21.01.15		LINEAR	ANGLES	1:1	杨章雄	2022.02.15	W-F200-NP-22D	ENDE05				
			UNIT: MM	0.0±0.30	X° REF±6°	APPROVED	董东平	2022.02.15	TITLE		REV	AO	SHEET	1/1
			SIZE: A4	0.00±0.20	X° ±3°	DESIGNER	Li Xing Ze	2022.02.15			2.0 PITCH电池母座			
				0.000±0.10	X° X' ±2°	DRAWN								

1

2

3

4





5

6

7

8

环保物料

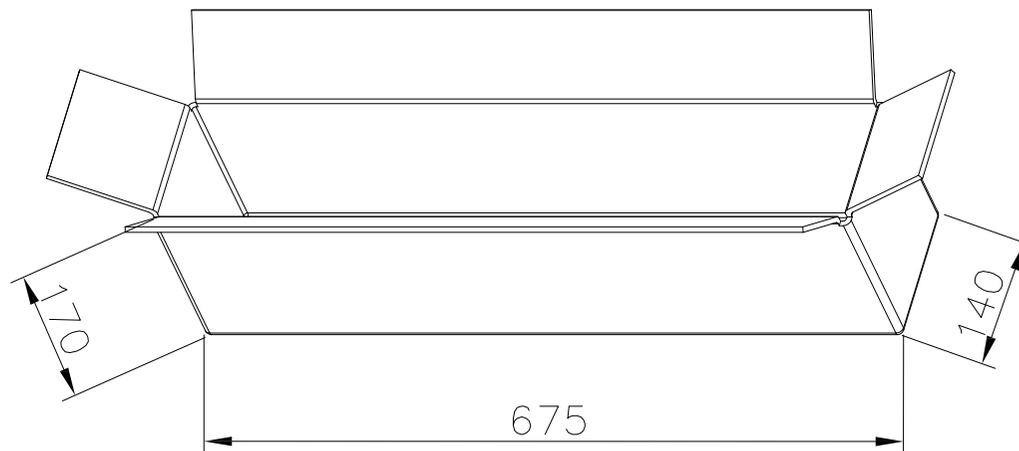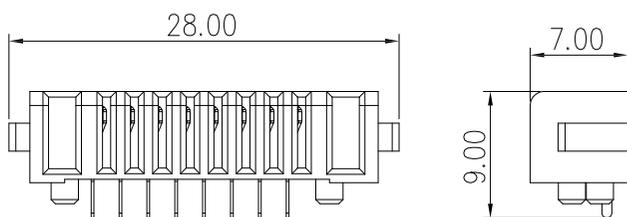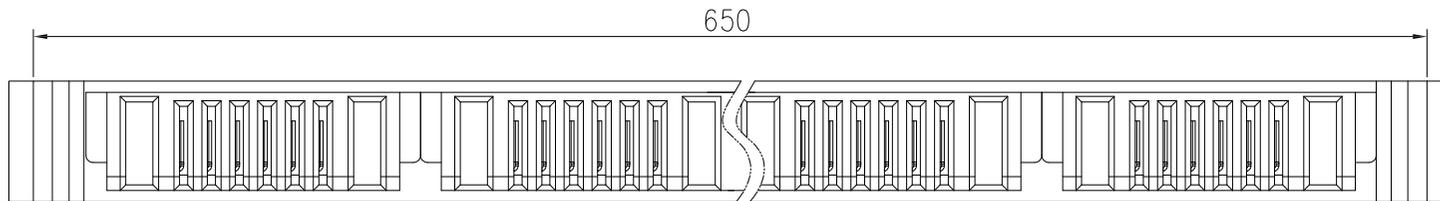

一支管要求包装22pcs(其中一管尾数包装18pcs).
每箱装182支管,共4000pcs.

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
AO	The new version file were released	2021.01.15		LINEAR	ANGLES	APPROVED			W-F200-8P-22D	ENDE05				
				0.0±0.25	X° REF±6°	DESIGNER			TITLE					
				UNIT: MM	0.00±0.15	X° ±3°	DRAWN	Li Xing Ze	2022.02.15	2.0 PITCH电池母座		REV	AO	SHEET
			SIZE: A4	0.000±0.08	X° X' ±2°									

1

2

3

4

5

6

7

8