


- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS
 - CURRENT RATING: 0.5 AMP
 - VOLTAGE RATING: 40 V
 - CONTACT RESISTANCE: 30MILLIOHMS MAX
 - INSULATION RESISTANCE: 100M MIN.@500V DC
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 4.5KGF MAX.
 - WITHDRAWING FORCE : 1KGF ~ 4KGF.
 - LIFE TEST: 10000 CYCLES
 - OPERATING TEMPERATURE: -25°C TO +85°C
 - PART NO. DESCRIPTION:

C	SHELL	1	C2680R-H NI 50U" T=0.5mm PLATING ALL OVER
B	TERMINAL	19	C2680R-H SEE PART NO.
A	HOUSING	1	LCP E130i UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	新图面发行	19.11.15	LINEAR	ANGLES	1:1			W-HDMI-L1540-0A4	ENDE05				
A1	换图框发行	23.10.16	0.0±0.30	X'REF±6°	APPROVED								
			0.00±0.20	X'±3°	DESIGNER			TITLE					
			UNIT: MM	0.00±0.10	X'X'±2°	DRAWN	Mlicky Ma	23.10.16	HDMI短体铜壳镀镍 螺孔高12.3 两K脚两直脚端子半光亮锡1u"	REV	A1	SHEET	1/1

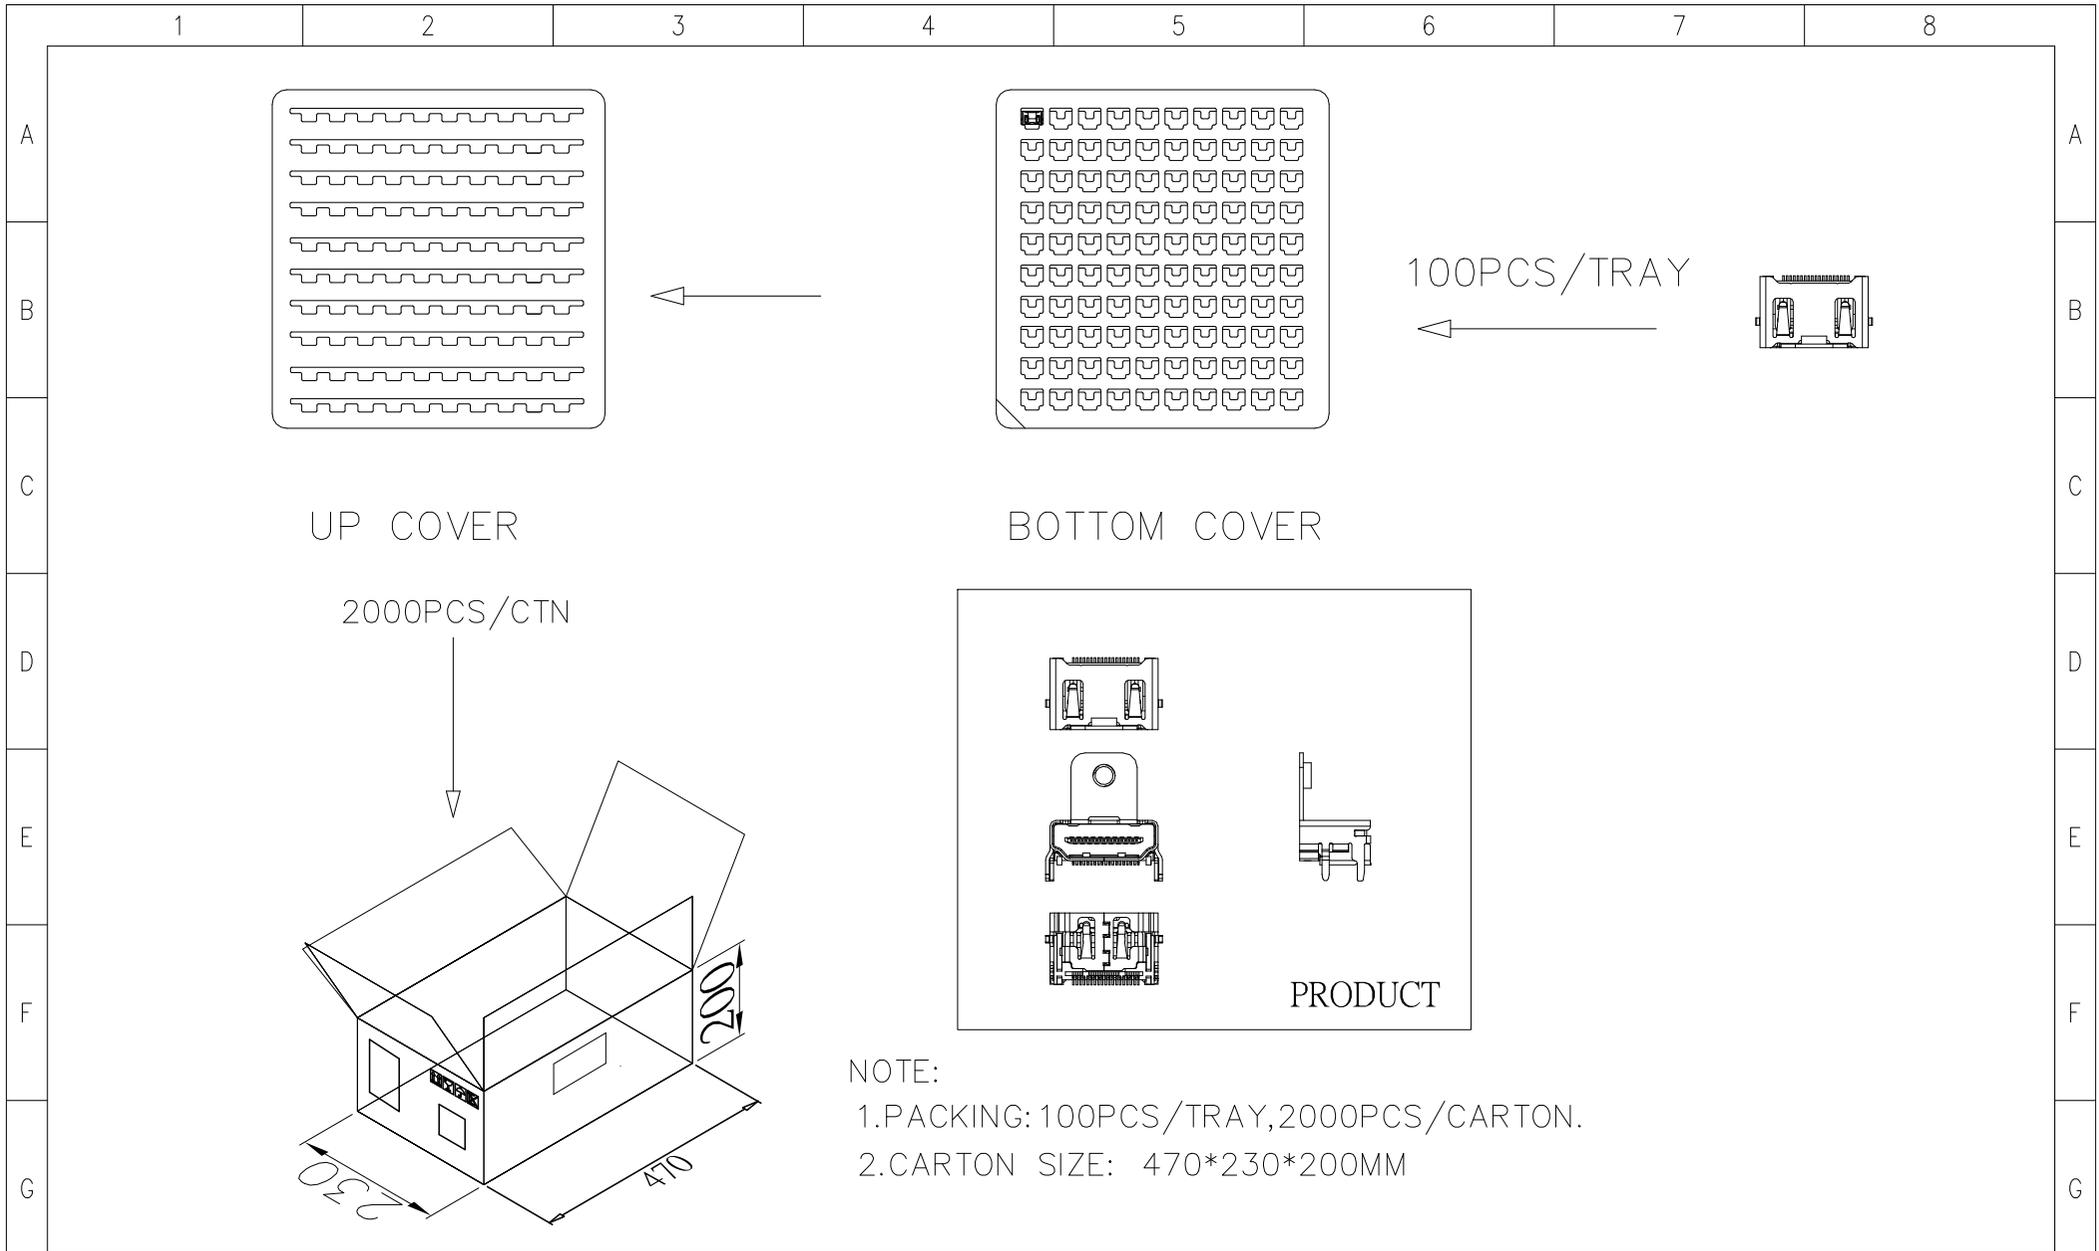

NOTE:
 1.PACKING: 100PCS/TRAY,2000PCS/CARTON.
 2.CARTON SIZE: 470*230*200MM

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	新图面发行	19.11.15		LINEAR	ANGLES	1:1								
A1	换图框发行	23.10.16	0.0±0.30	X°REF±6°	APPROVED			W-HDMI-L1540-0A4	ENDE05					
			UNIT: MM	0.00±0.20	X°±3°	DESIGNER			TITLE					
			SIZE: A4	0.000±0.10	X°X'±2°	DRAWN	Mlicky Ma	23.10.16	HDMI短体铜壳镀镍 螺孔高12.3 两K脚两直脚端子半金亮锡1u"	REV	A1	SHEET	1/1	

1

2

3

4

5

6

7

8