


SPECIFICATION

1. Rating : DC 12V 3A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.
7. PART No.



W-JA02603-0A00

JA: JACK L0: ROHS+HF
 OA: G/F L0: REEL


5	HOUSING	1	HIGH TEMP.THERMOPLASTIC UL 94V-0	BLACK COLOR
4	STOPPER	1	HIGH TEMP.THERMOPLASTIC UL 94V-0	BLACK COLOR
3	SHELL	1	COPPER ALLOY 0.2t	Ni:50U"
2	SPRING (-)	1	COPPER ALLOY 0.3t	GOLD FLASH OVER Ni50U"
1	PIN (+)	1	BRASS BAR	GOLD FLASH OVER Ni50U"
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

A2	21.07.21	更新图框发行	董东平	杨章雄	一般公差 GENERAL TOLERANCE X.X ±0.30 X' ±2' X.XX ±0.20 X.X' ±1' X.XXX ±0.10 ▲ MAJOR DIM. 单位 UNIT mm	绘图 DR. 李兴泽	料号 PART NO. W-JA02603-0A00 文件编号 NUMBER ENDPT01 品名 TITLE DC POWER JACK	比例 SCALE 1/1	SHEET 1/1	版次 REV. A2
A1	17.08.28	修改尺寸公差 Δ	李兴泽	杨章雄		校对 CHK. 董东平				
A0	17.08.18	新图面发行	李兴泽	杨章雄		审核 CHK. 董东平				
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.		核准 APPD. 杨章雄				


TERMINAL&CONNECTORS	

环保物料


检验规范

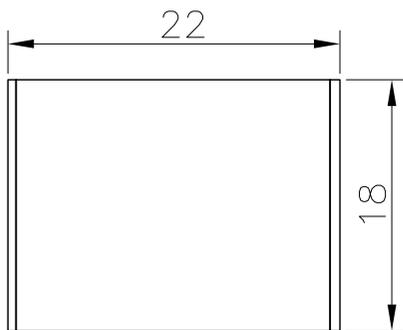


PE袋500pcs

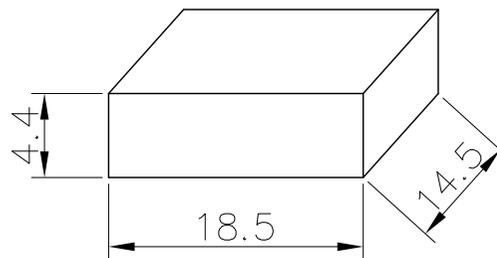

小纸盒 (1x500=500pcs)=1盒

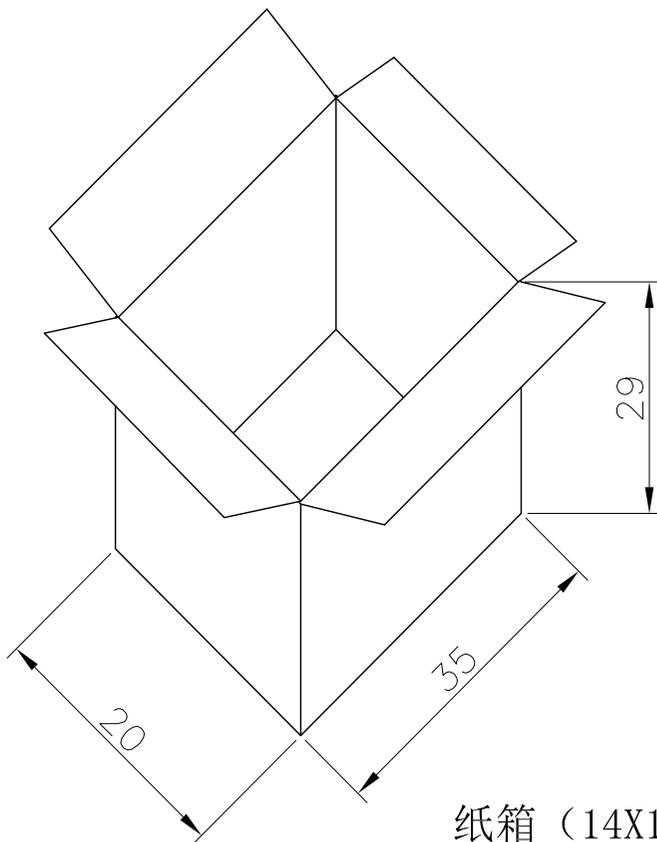

纸箱 (14X1X500=7000pcs) =1箱

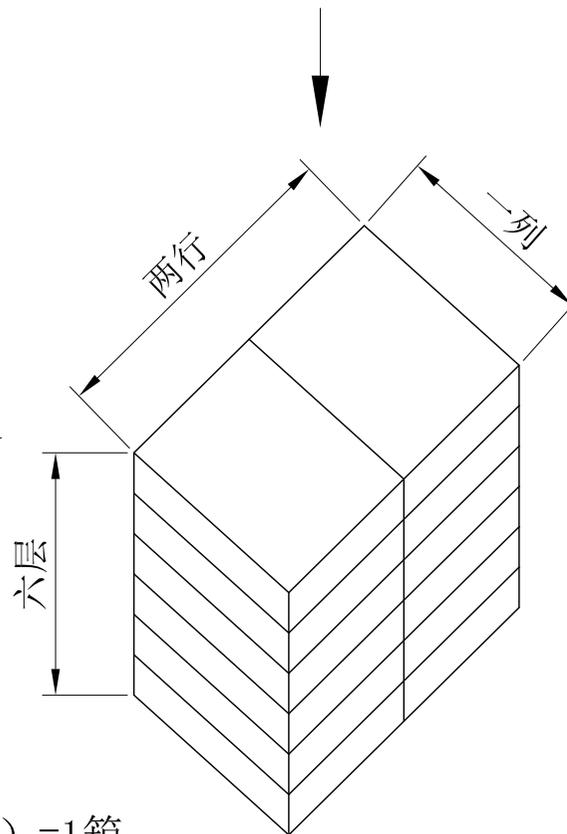

					一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS			
					X.X ±0.30	X' ±2'	校对 CHK.		W-JA02603-0A00	ENDPT01				
A1	21.07.21	更新图框发行	董东平	杨章雄	X.XX ±0.20	X.X' ±1'	审核 CHK.		品名 TITLE			比例 SCALE	SHEET	版次 REV.
A0	17.08.18	新图面发行	李兴泽	杨章雄	X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		DC POWER JACK			1/1	1/1	A1
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm	