

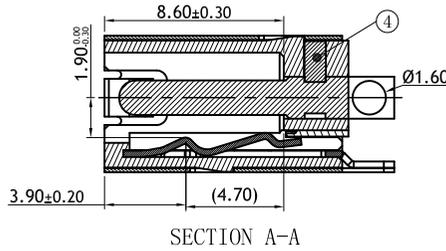






MATING PLUG






SECTION A-A

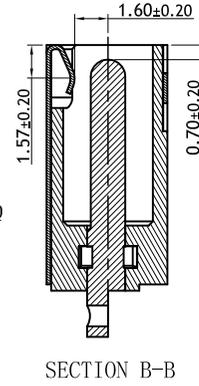

SECTION B-B

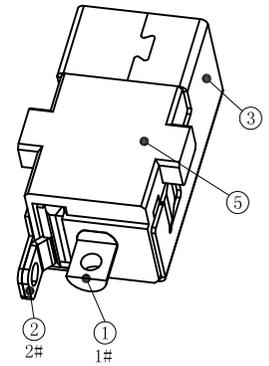

-B

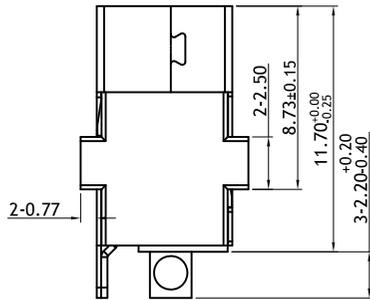

SPECIFICATION

1. Rating : DC 24V 3A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.
7. PART No.

SCHEMATIC	
	1# PIN(+)
	2# SPRING(-)

W-JA04502-0A00


JA: JACK
0A: G/F
0: ROHS+HF
0: REEL

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	HOUSING	1	LCP UL 94V-0	BLACK COLOR
4	STOPPER	1	LCP UL 94V-0	BLACK COLOR
3	SHELL	1	COPPER ALLOY 0.2t	Soldering Ni:50U"
2	SPRING (-)	1	COPPER ALLOY 0.3t	GOLD FLASH OVER Soldering Ni50U"
1	PIN (+)	1	BRASS BAR	GOLD FLASH OVER Soldering Ni50U"


一般公差 GENERAL TOLERANCE					绘图 DR.	李兴泽
X.X	±0.30	X'	±2'	校对	董东平	料号 PART NO. W-JA04502-0A00
X.XX	±0.20	X.X'	±1'	审核	董东平	
X.XXX	±0.10	▲ MAJOR DIM.		核准	杨章雄	
单位 UNIT	mm			核准 APPD.	杨章雄	品名 TITLE DC POWER JACK
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.		

文件编号 NUMBER		JCTC®	
ENDPT01		TERMINAL&CONNECTORS	
比例 SCALE	SHEET	版次 REV.	
1/1	1/1	A1	


环保物料

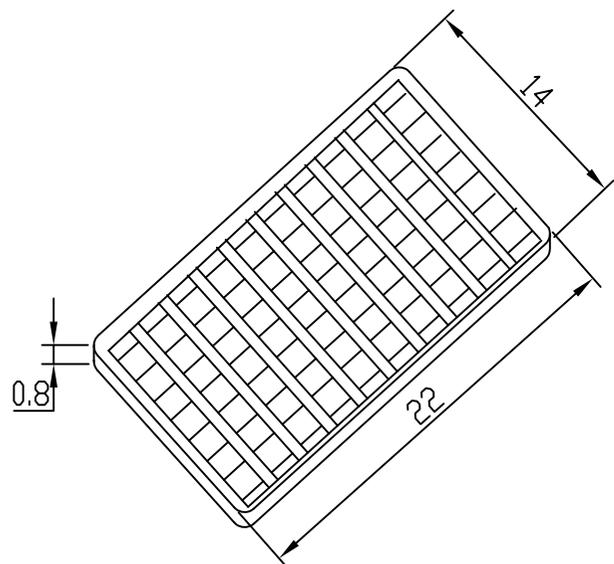


吸塑盒

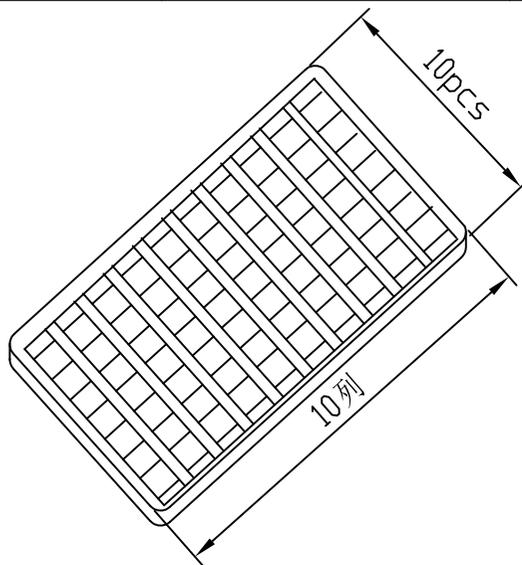

吸塑盒 (100pcs)

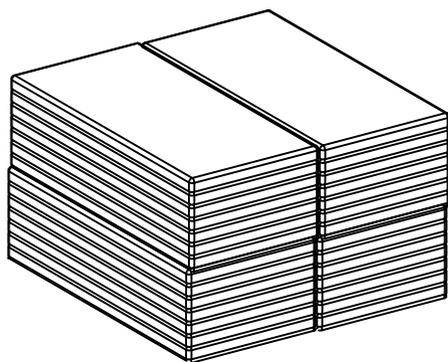

内箱 (100pcs*90盒=9000pcs)

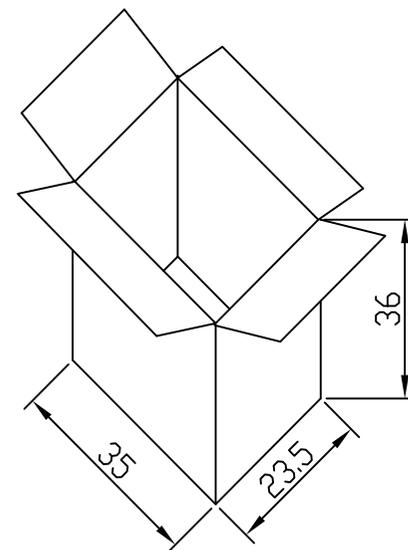

纸箱 (100pcs*90盒=9000pcs)

						一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO. W-JA04502-0A00		文件编号 NUMBER ENDPT01		 TERMINAL&CONNECTORS	
A1		21.07.21	更新图框发行	董东平	杨章雄	X.X ±0.30	X' ±2°	校对 CHK.		品名 TITLE		比例 SCALE			
A0		17.09.04	换图框发行	李兴泽	杨章雄	X.XX ±0.20	X.X' ±1°	审核 CHK.		DC POWER JACK 焊线式沉板		1/1		1/1	
版次 REV.		日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm	核准 APPD.				版次 REV.		A1	