


环保物料

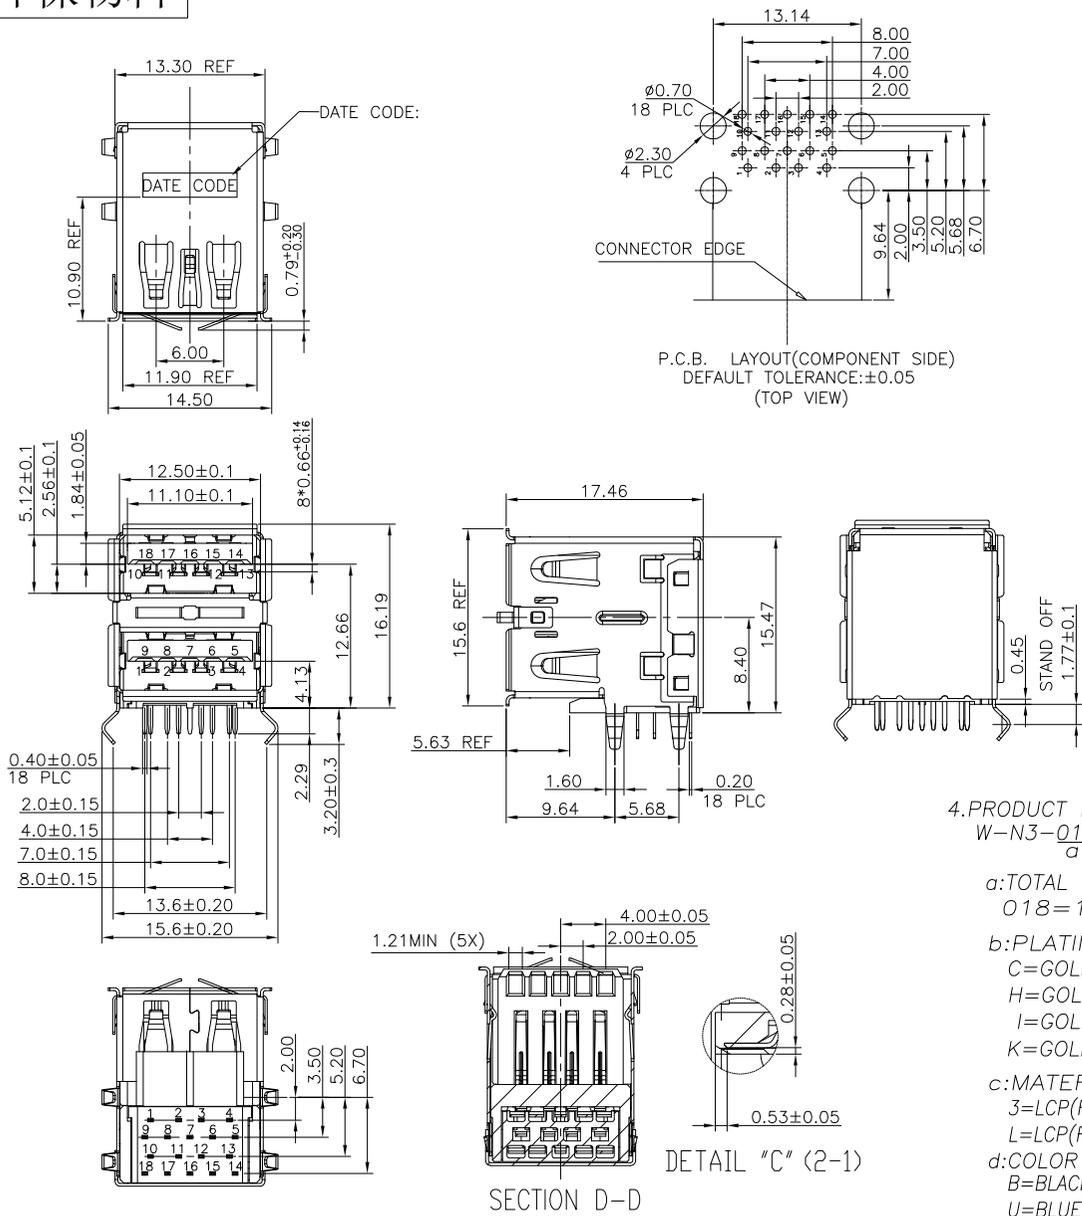

P.C.B. LAYOUT (COMPONENT SIDE)
DEFAULT TOLERANCE: ±0.05
(TOP VIEW)

- NOTES:
- MATERIAL:
 - HOUSING: LCP UL 94V-0, COLOR: SEE P/N.
 - INNER INSULATOR: LCP UL 94V-0, COLOR: SEE P/N.
 - 2.0 CONTACT: C2680R-EH T=0.20mm
 - 3.0 CONTACT: C2680R-EH T=0.20mm
 - SHELL: SUS201 T=0.25mm
 - MIDDLE SHELL: SUS201 T=0.20mm
 - FINISH:
 - CONTACT: GOLD PLATED (SEE TABLE) ON CONTACT AREA, 100U" TIN PLATED ON SOLDER TALLS, 50U" MIN. NICKEL UNDERPLATING OVER ALL.
 - SHELL: 80U" MIN. NICKEL UNDERPLATING OVER ALL.
 - ELECTRICAL:
 - CONTACT RESISTANCE: 30 mΩ (MAX) INITIAL FOR VBUS AND GND CONTACTS, 50 mΩ (MAX) INITIAL FOR OTHER CONTACTS
 - CURRENT RATING: VBUS & GND pins: 1.8Amps MAX PER PIN; OTHER PINS: 0.25A/PIN;
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR 1 MINUTE.
 - INSULATION RESISTANCE: 100 MΩ MIN

4. PRODUCT NO. MATRIX:
W-N3-018x-xx16
a b cd

a: TOTAL PIN
018 = 18pin

b: PLATING TYPE
C = GOLD G/F
H = GOLD 15u"
I = GOLD 20u"
K = GOLD 30u"


c: MATERIAL
3 = LCP (ROHS)
L = LCP (ROHS 2.0+HF)

d: COLOR
B = BLACK
U = BLUE

USB 2.0 CONTACT PINS		USB 3.0 CONTACT PINS			
Pin NUMBER	SIGNAL NAME	Pin NUMBER	SIGNAL NAME	Pin NUMBER	SIGNAL NAME
1	10	5	14	StdA_SSRX-	
2	11	6	15	StdA_SSRX+	
3	12	7	16	GND_DRAIN	
4	13	8	17	StdA_SSTX-	
Shell	Shield	9	18	StdA_SSTX+	

					一般公差 GENERAL TOLERANCE	绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	 TERMINAL & CONNECTORS		
A1	21.09.09	更新图框发行	董东平	杨章雄	X.X ±0.30 X' ±2°	校对 CHK.		W-N3-018x-xx16	ENDPT01			
A0	19.07.16	换图框发行	李兴泽	杨章雄	X.XX ±0.20 X.X' ±1°	审核 CHK.		品名 TITLE		比例 SCALE	SHEET	版次 REV.
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	X.XXX ±0.10 ▲ MAJOR DIM.	核准 APPD.		USB 3.0 H=15.52mm CH=8.40mm, STD-SHORT, DOUBLE STACKED DIP TYPE.		1/1	1/1	A1

环保物料

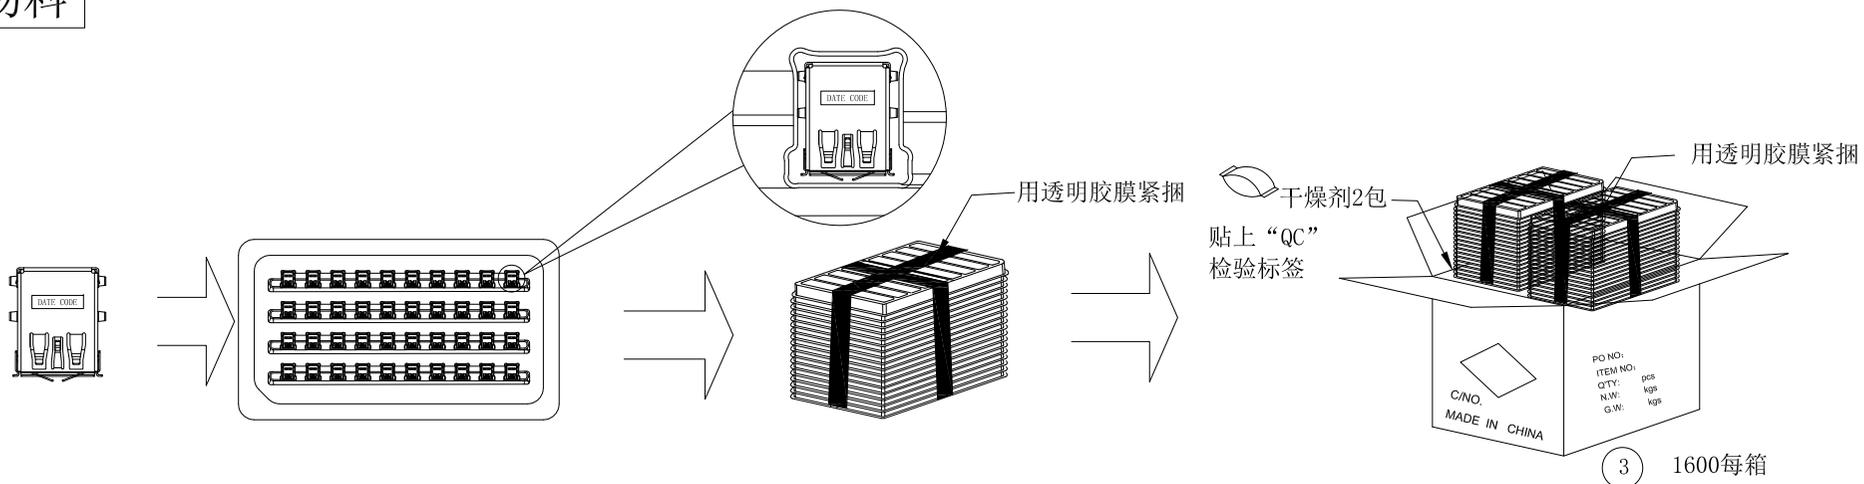


产品 ①

40每盘 ②


20盘/叠 ②

③ 1600每箱


外箱物料标签

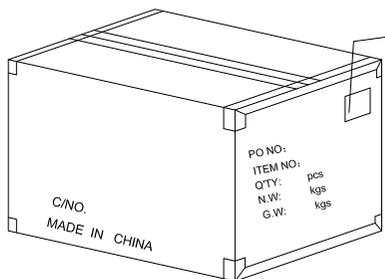

⑥ 依图示粘贴产品或其它标签.

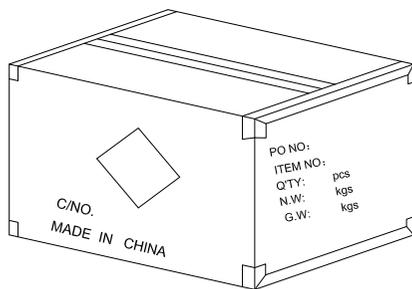

⑤ 外箱用透明胶纸带封“工”字型.

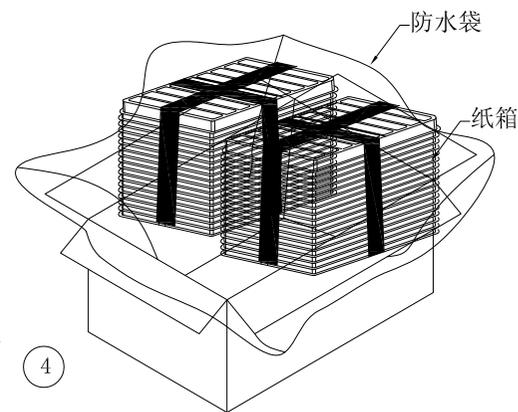

④

备注:

1. 将检验好的产品端子脚朝下放入真空盒内, 每盘装成品40Pcs;
2. 将20个+1TRAY做上盖装满成品的真空盒重叠放置后, 用保鲜膜紧捆
3. 每箱2叠共1.6K PCS;并放干燥剂
3. 外箱尺寸与规格印刷: 详见包材图面;
4. 外箱用透明胶纸带封“工”字型;
5. 依外箱图示位置粘贴好产品或其它标签.
(若客户另有贴标签要求, 则按其定单注明之要求贴)

					一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	 TERMINAL & CONNECTORS			
					X.X ±0.30	X' ±2°	校对 CHK.		W-N3-018x-xx16	ENDPT01				
					X.XX ±0.20	X.X' ±1°	审核 CHK.		品名 TITLE			比例 SCALE	SHEET	版次 REV.
					X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		USB 3.0 H=15.52mm CH=8.40mm, STD-SHORT, DOUBLE STACKED DIP TYPE.			1/1	1/1	A1
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm								