

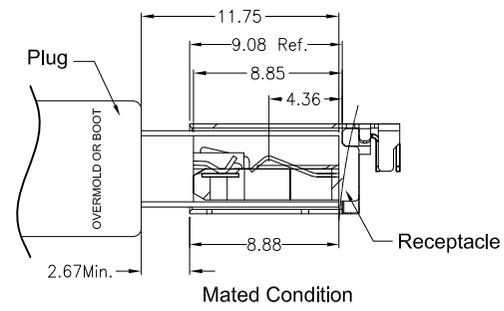
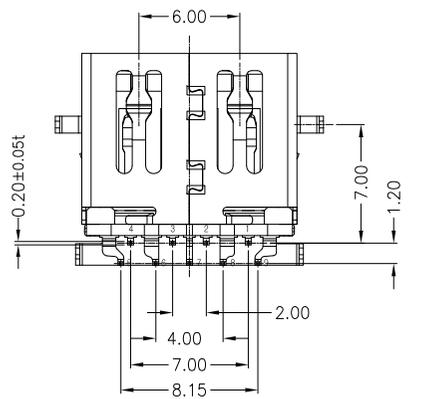




- NOTES:
- MATERIAL:  
Housing: High Temperature Plastic.UL94V-0,Blue/Black  
Contact: Copper Alloy.  
Shell: Stainless Steel.
  - PLATING:  
Contact: Au Plated on Contact Area,  
Matt-Sn 100u" Plated on Solder Tails.  
Ni 50u" min UnderPlated.  
Shell: Ni 50u"Min Plated All Over
  - MECHANICAL CHARACTERISTIC  
Mating Force: 0.6~2.0Kg.  
Unmating Force: 0.8~2.0Kg(Initial);  
0.6~2.0Kg(After)  
Durability: 5000 Cycles.
  - ELECTRICAL CHARACTERISTIC  
Current Rating: 1.5A  
Contact Resistance: 30m Ohm Max.  
Insulation Resistance: 1000M Ohm Min  
Dielectric Withstanding Voltage: 500V AC Min
  - TEMPERATURE  
Operating Temperature: -40°C~+85°C  
Storage Temperature: -60°C~+105°C
  - ORDER INFORMATION:  
W-N3-CF085-X XX
- A: Black  
R: Blue
- Contact Area plating on contacts  
01: G/F  
03: Au 3u"  
05: Au 5u"  
10: Au 10u"  
15: Au 15u"  
30: Au 30u"

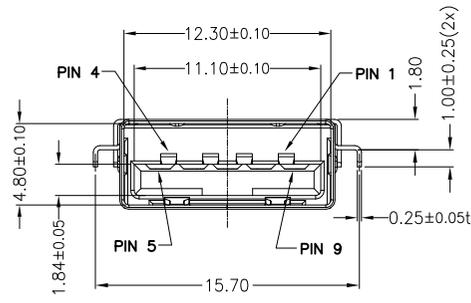


Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	StdA_SSRX-
PIN6	StdA_SSRX+
PIN7	GND_DRAIN
PIN8	StdA_SSTX-
PIN9	StdA_SSTX+
Shell	Shield

					一般公差 GENERAL TOLERANCE	绘图 DR.	马仔	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS		
					X.X ±0.35 X' ±2*	校对 CHK.	董东平	W-N3-CF085-XXX	ENDPT01			
					X.XX ±0.25 X.X' ±1*	审核 CHK.	董东平	品名 TITLE		比例 SCALE	SHEET	版次 REV.
					X.XXX ±0.15 ▲ MAJOR DIM.	核准 APPD.	杨章雄	USB3.0 A/F DIP RVS Type		1/1	1/1	A1
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT			CH=-0.85mm Product				


PACKAGING INSTRUCTION:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON  
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED  
IN THE CHART.



PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
W-N3-CF085-XXX	4000 (PCS)	400 (PCS)	10

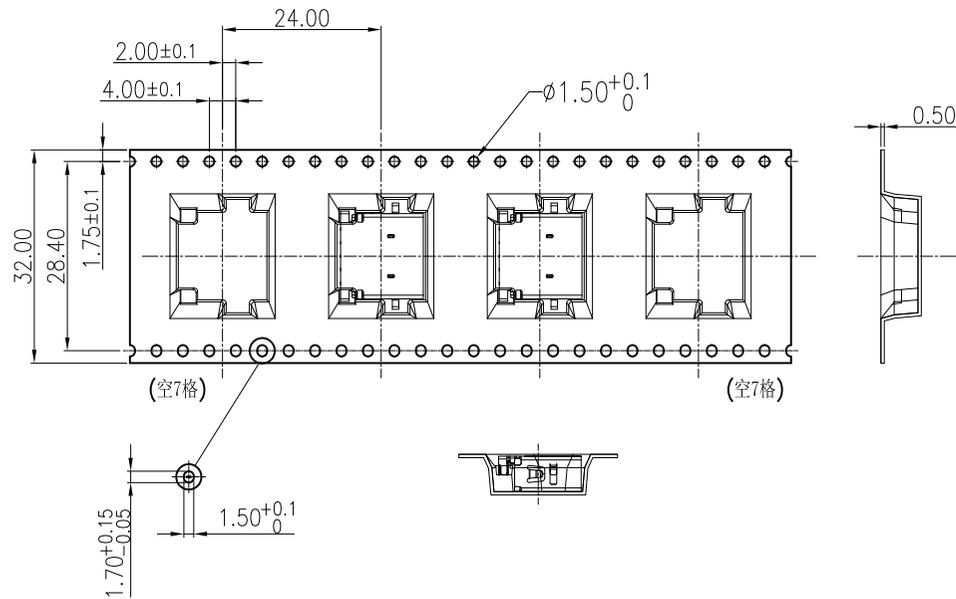

1. QUANTITY: 400 PCS
2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

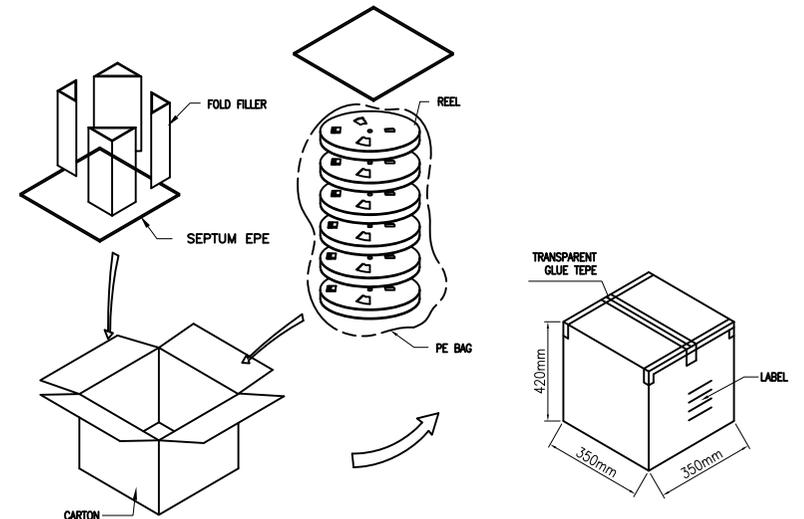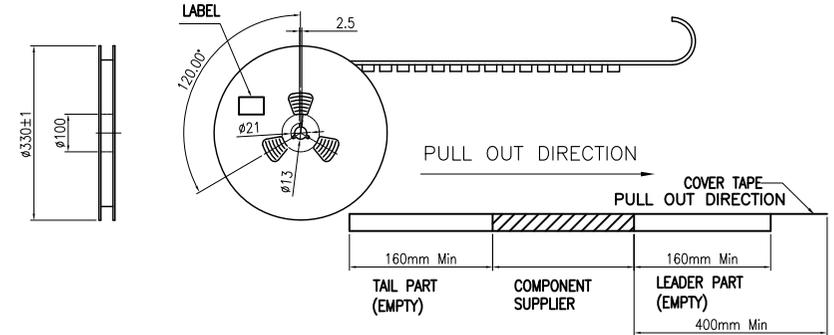

版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A0	20. 12. 04	新图面发行	董东平	杨章雄

一般公差 GENERAL TOLERANCE	
X.X ±0.30	X* ±2*
X.XX ±0.20	X.X* ±1*
X.XXX ±0.10	▲ MAJOR DIM.

绘图 DR.	李兴泽
校对 CHK.	董东平
审核 CHK.	董东平
核准 APPD.	杨章雄

料号 PART NO.	W-N3-CF085-XXX
品名 TITLE	USB3.0 AF R/A DIP TYPE CH=-0.85包装规范

文件编号 NUMBER	ENDPT01
-------------	---------

JGTC® TERMINAL&CONNECTORS		
比例 SCALE	SHEET	版次 REV.
1/1	1/1	A0