
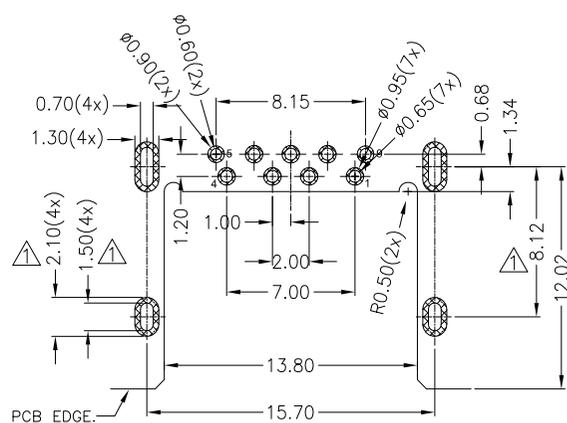


环保物料




检验规范

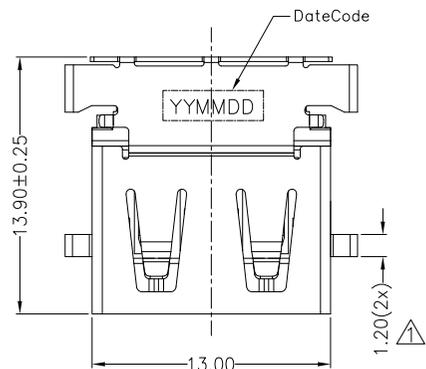




RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCES: ±0.05 (T=0.8~1.0mm)

NOTES:

- MATERIAL:**
Housing: High Temperature Plastic.UL94V-0,Blue.
Contact: Copper Alloy.
Shell: Stainless Steel.
- PLATING:**
Contact: Au Plated on Contact Area,
Matt-Sn 100u" Plated on Solder Tails.
Ni 50u" min UnderPlated.
Shell: Ni 50u"Min Plated All Over
- MECHANICAL CHARACTERISTIC**
Mating Force: 25N max.
Unmating Force: 7~20N(Initial);
10000 Cycles: No More Than 50% Form Initial,
10000 Cycles: Function Ok.
Durability: 10000 Cycles.
- ELECTRICAL CHARACTERISTIC**
Current Rating: 1.5A
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min
Dielectric Withstanding Voltage: 500V AC Min
- TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- ORDER INFORMATION:**
W-N3-CF140-GXX

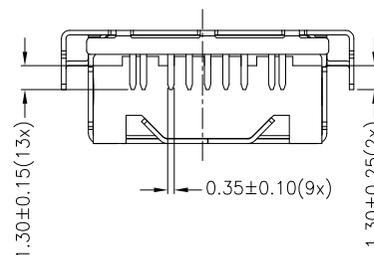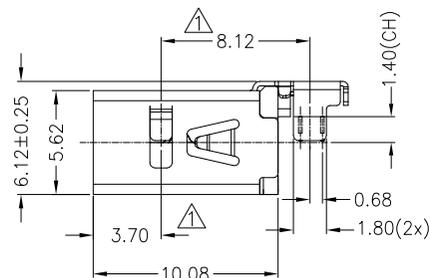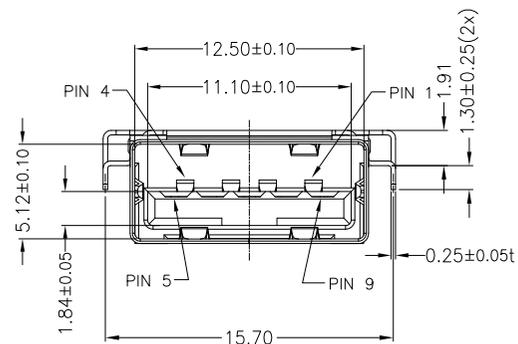

Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

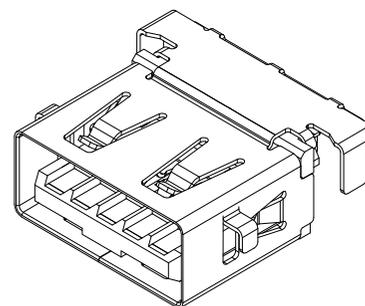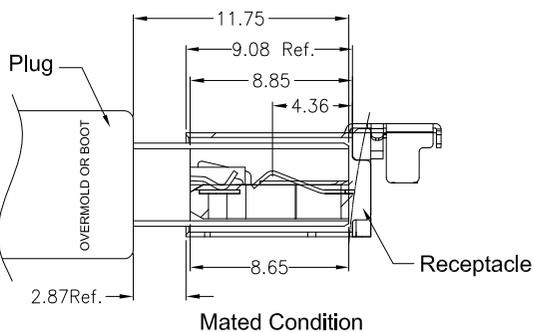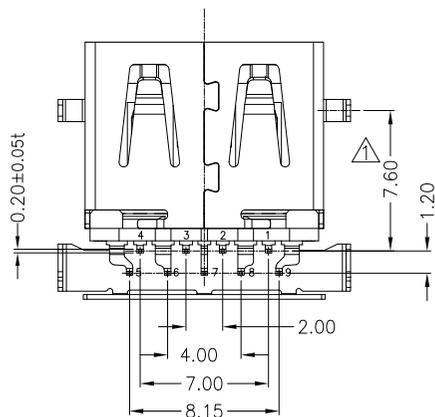


Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	StdA_SSRX-
PIN6	StdA_SSRX+
PIN7	GND_DRAIN
PIN8	StdA_SSTX-
PIN9	StdA_SSTX+
Shell	Shield

A				B				C				D				E				F			
				一般公差GENERAL TOLERANCE				绘图DR.				料号 PART NO.				文件编号 NUMBER							
A1				21.01.11				X.X ±0.30				W-N3-CF140-GXX				ENDPT01							
A0				20.12.03				X.XX ±0.20				品名TITLE				USB3.0 A/F DIP RVS Type							
修改外壳脚位去除盖子				董东平				X.X* ±2°				CH= -1.4mm Product				比例SCALE							
新图面发行				李兴泽				X.X* ±1°				SHEET				1/1							
变更内容				杨章雄				▲ MAJOR DIM.				核准 APPD.				版次 REV.							
DESCRIPTION				杨章雄				单位UNIT				核准 APPD.				A1							
mm								mm															

PACKAGING INSTRUCTION:


1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED IN THE CHART.

PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
W-N3-CF140-GXX	3500 (PCS)	350 (PCS)	10


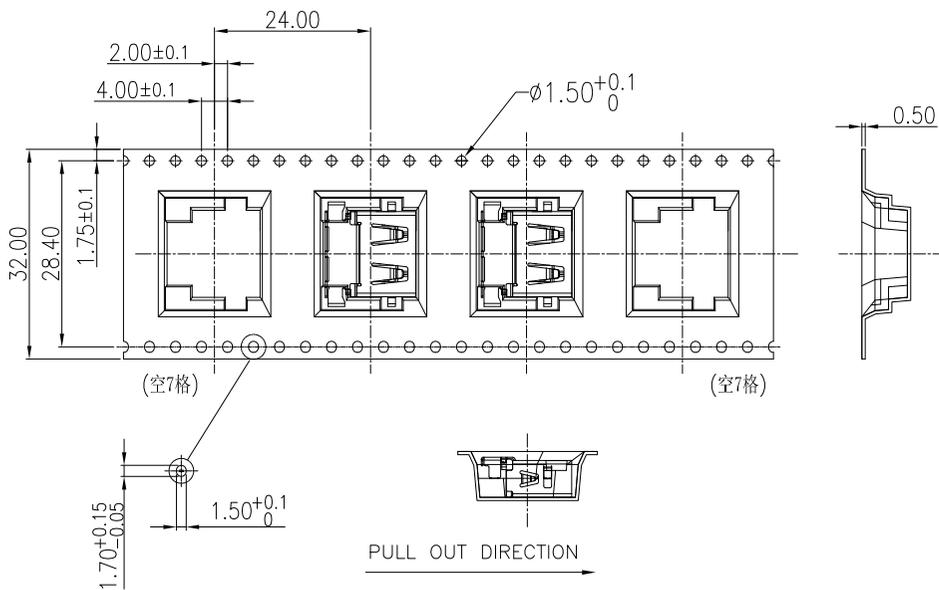


1. QUANTITY: 350 PCS

2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

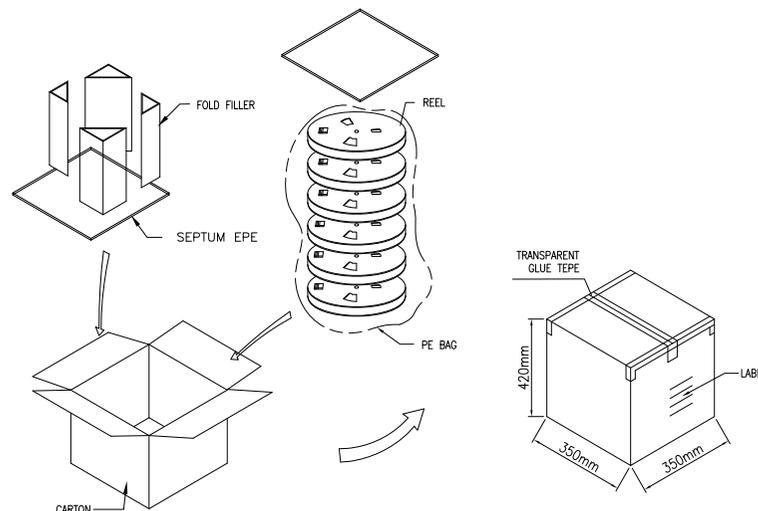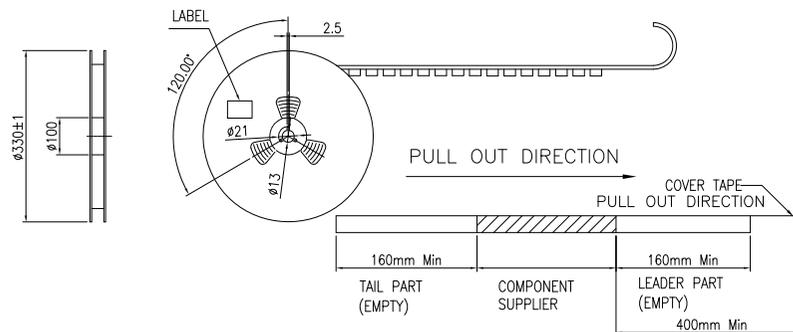

版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A1	21.01.11	修订包装规范	董东平	杨章雄
A0	20.12.03	新图面发行	董东平	杨章雄

一般公差 GENERAL TOLERANCE	
X.X ±0.30	X' ±2°
X.XX ±0.20	X.X' ±1°
X.XXX ±0.10	▲ MAJOR DIM.
单位 UNIT	
mm	

绘图 DR.
校对 CHK.
审核 CHK.
核准 APPD.

料号 PART NO.
W-N3-CF140-GXX
品名 TITLE
USB3.0 AF R/A DIP TYPE CH=-1.4 包装规范

文件编号 NUMBER
ENDPT01

JCTC ® TERMINAL & CONNECTORS		
比例 SCALE	SHEET	版次 REV.
1/1	1/1	A1