
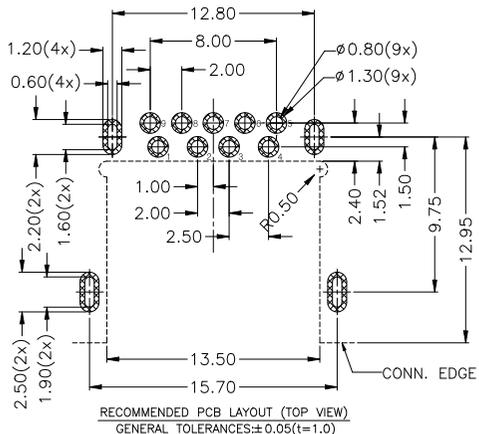










环保物料 HF

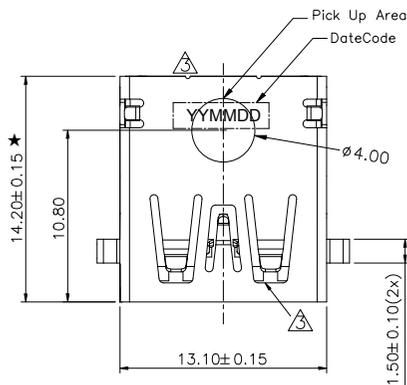

- NOTES:
- MECHANICAL CHARACTERISTIC
 - Mating Force: 25N Max.
Unmating Force: 10~25N
 - Contact retention: 5N/pin min after IR
 - ELECTRICAL CHARACTERISTIC
 - Rating Voltage: 30V AC.
 - Current Rating: 1.8A(For VBUS And GND Pin)
Other Contacts 0.25A
 - Contact Resistance: 30m Ohm Max, after Δ10m Ohm
 - Insulation Resistance: 1000M Ohm Min
 - Dielectric Withstanding Voltage: 500V AC Min
 - Meet Gen2.
 - TEMPERATURE
 - Operating Temperature: -40°C~+85°C
 - Salt Spray: 48Hours.
 - Burr: 0.05mm Max.
 - Tape and reel packing satisfy EIA-364-481-D standard.
 - Dimension marked Δ should 100% CCD inspecte
Dimension marked ★ should CPK>1.33
Dimension marked ▲ should SIP inspecte by QC and IQC
 - ORDER INFORMATION:
W-N3-CH000-XXX

8=Blue
9=Black

Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

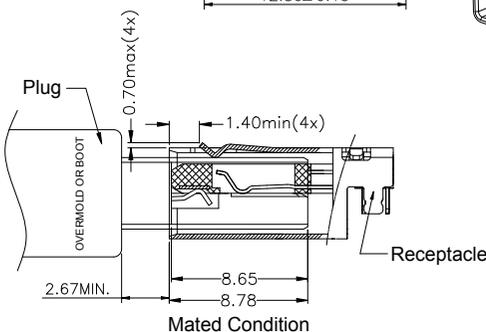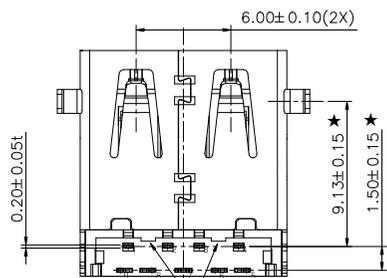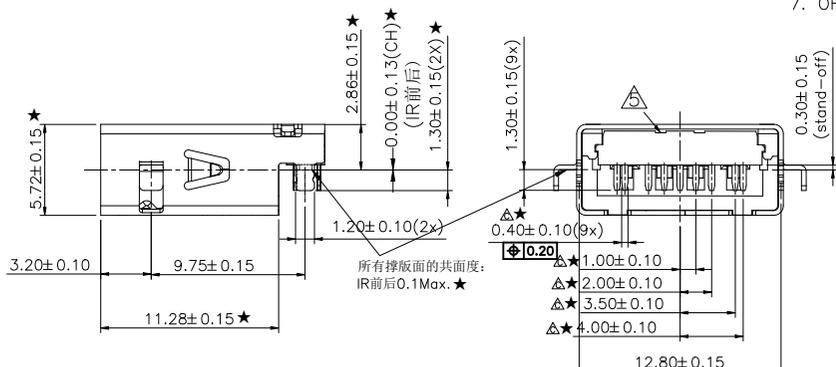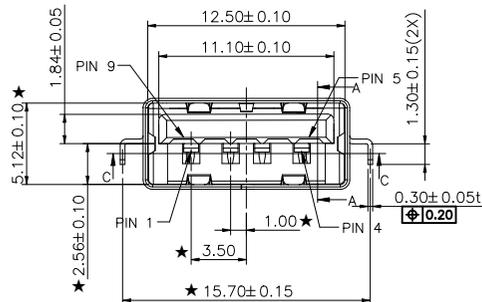

CONNECTOR BOM:

4	HOUSING	1	LCP	BLACK or BLUE,U94 V-0
3	SHELL	1	SUS201-H,T=0.30	Ni 50u"MIN PLATED OVER ALL
2	4P CONTACT	4	C5191-H,T=0.20	CONTACT AREA 1/2"MIN,SOLDER AREA PLATING 80u"MIN MATTE TIN,UNDER PLATING 50u"MIN NICKEL
1	5P CONTACT	5	C5191-H,T=0.20	
ITEM	PART NAME	QTY	MATERIA	FINISH/PLATING

塑胶进胶口, 模具对称,
进胶口有在左或在右有现象。

REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4
A0	新图面发行	20.08.21		
A3	依实物更新图纸	21.07.03		
A4	按客户规范更新图纸	23.03.13		
A5	依实物更新图纸	24.01.17		

GENERAL TOLERANCES		SCALE	NAME	DATE
LINEAR	ANGLES	1:1	Frey Yang	24.01.17
0.0±0.30	X° REF±6°	APPROVED	Daniel Dong	24.01.17
0.00±0.25	X° ±3°	DESIGNER	Micky Ma	24.01.17
0.000±0.10	X° X' ±2°	DRAWN		

PART NO.	DWG NO.
W-N3-CH000-XXX	ENDE05
TITLE	
USB3.1 A TYPE RECEPTACLE	
RIGHT ANGLE DIP C/H=0.0mm	



Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	StdA_SSRX-
PIN6	StdA_SSRX+
PIN7	GND_DRAIN
PIN8	StdA_SSTX-
PIN9	StdA_SSTX+
Shell	Shield

JCTC ®			
TERMINAL&CONNECTORS			
REV	A5	SHEET	1/1

PACKAGING INSTRUCTION I:


1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.

PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
W-N3-CH000-XXX	4000 (PCS)	400 (PCS)	10

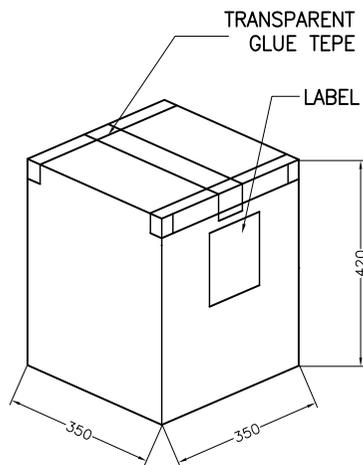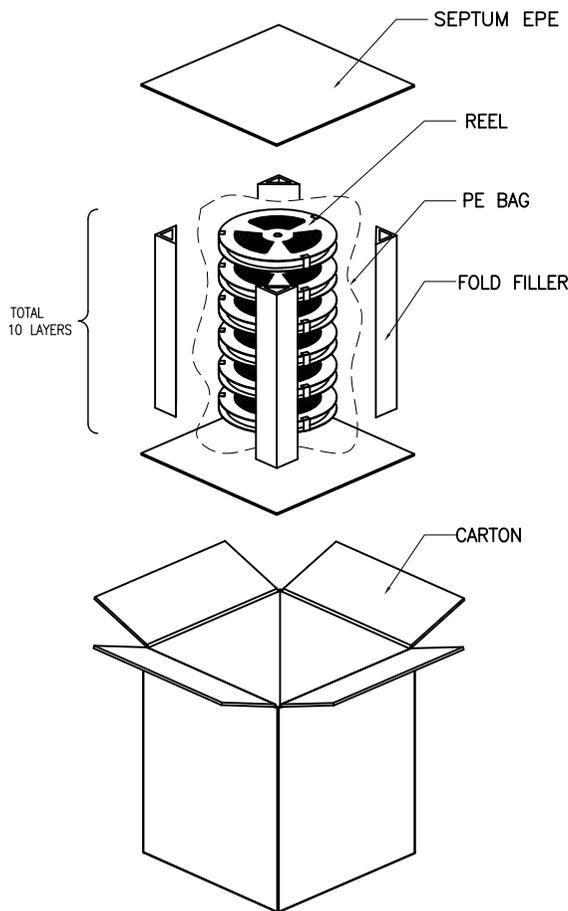


1. QUANTITY: 400 PCS

2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

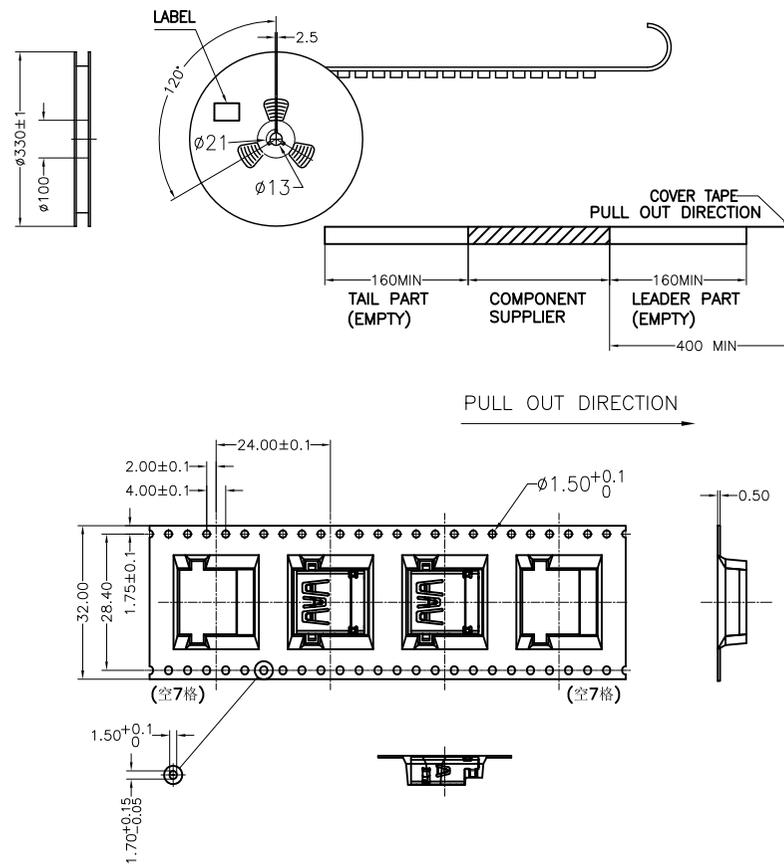

版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A0	20.09.22	新图面发行	董东平	杨章雄

一般公差 GENERAL TOLERANCE	
X.X ±0.30	X* ±2*
X.XX ±0.25	X.X* ±1*
X.XXX ±0.15	▲ MAJOR DIM.

绘图 DR.	
校对 CHK.	
审核 CHK.	
核准 APPD.	

料号 PART NO.	W-N3-CH000-XXX
品名 TITLE	USB3.1 A TYPE RECEPTACLE RIGHT ANGLE DIP C/H=0.0mm

文件编号 NUMBER	ENDPT01
-------------	---------

 TERMINAL&CONNECTORS		
比例 SCALE	SHEET	版次 REV.
1/1	1/1	A0