

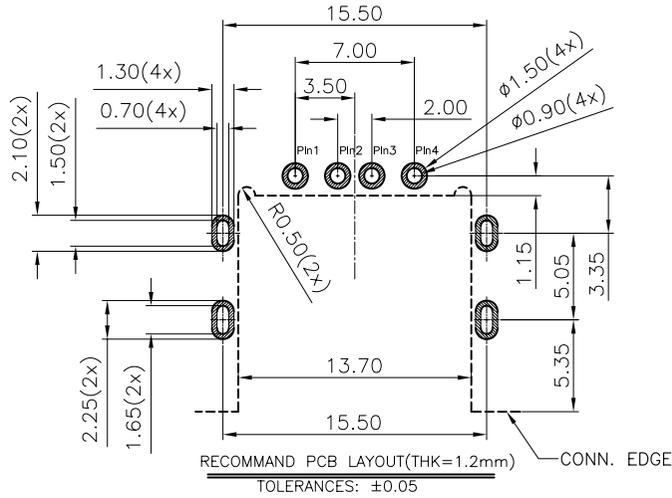
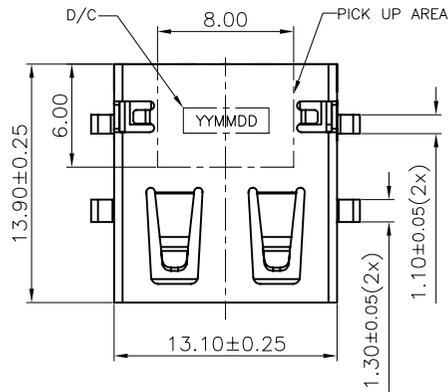


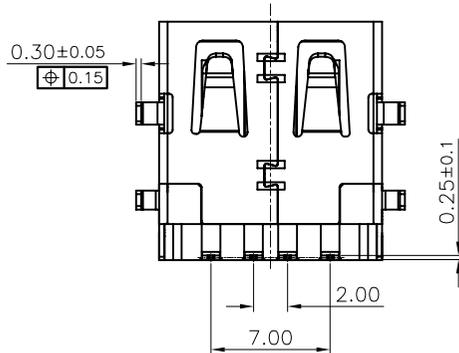
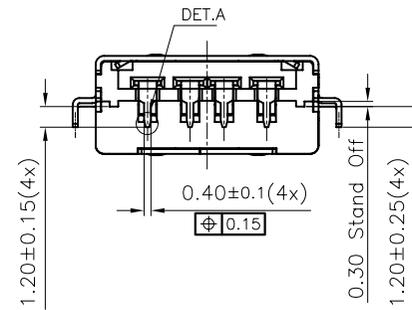


环保物料

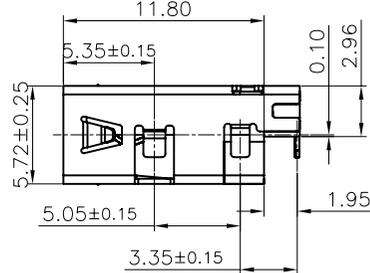

- NOTES:
- MATERIAL AND PLATING:  
Housing: LCP+30%G.F,UL94V-0,Black  
Contact: Phosphor Bronze,Au And Sn Plated.  
Shell: Steel,Ni Plated.
  - MECHANICAL CHARACTERISTIC  
Mating Force: 35N(3.57Kgf) Max.  
Unmating Force: 10N(1.02Kgf) Min.  
Durability: 1,500 Cycles.
  - ELECTRICAL CHARACTERISTIC  
Current Rating: 1.5A  
Voltage Rating: 30V AC Max.  
Contact Resistance: 30m Ohm Max.  
Insulation Resistance: 1000M Ohm Min.  
Dielectric Withstanding Voltage: 500V AC.
  - TEMPERATURE  
Operating Temperature: -40°C~+85°C  
Storage Temperature: -60°C~+105°C
  - DATE CODE: YYMMDD (Y:YEAR M:MONTH D:DATE)
  - ORDER INFORMATION:  
W-N3-CH001-RXX

Contact Area plating on contacts  
01: G/F      03: Au 3u"  
05: Au 5u"    10: Au 10u"  
15: Au 15u"   30: Au 30u"

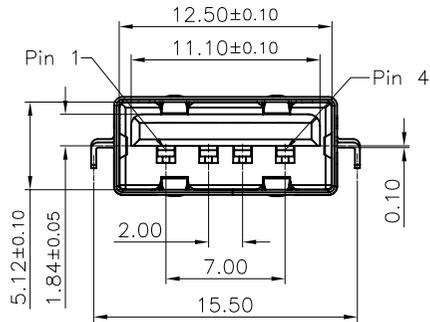

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND

一般公差 GENERAL TOLERANCE					绘图 DR.	料号 PART NO.	文件编号 NUMBER	JCTC® TERMINAL&CONNECTORS		
X.X	±0.30	X'	±2'		校对 CHK.	W-N3-CH001-RXX	ENDPT01			
X.XX	±0.20	X.X'	±1'		审核 CHK.	品名 TITLE				
X.XXX	±0.10	▲ MAJOR DIM.			核准 APPD.	USB2.0 AF R/A DIP TYPE CH=0.1		比例 SCALE	SHEET	版次 REV.
单位 UNIT	mm							1/1	1/1	A1

