
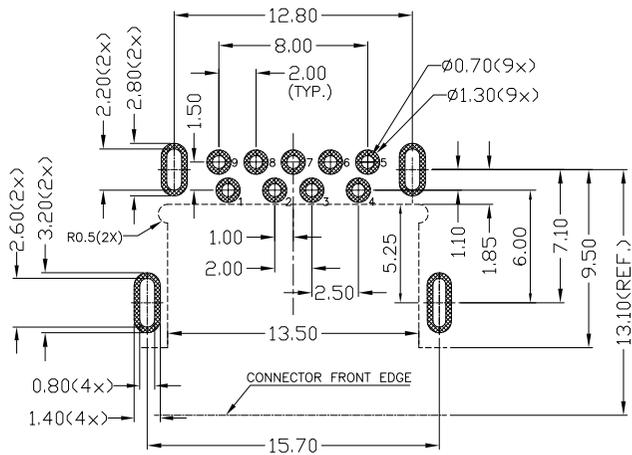








环保物料

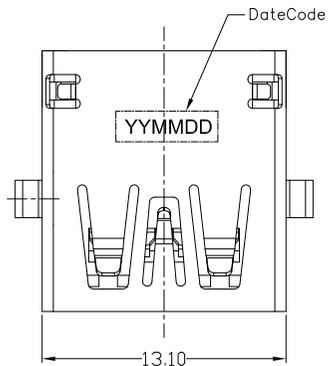

RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCES: ±0.05 (t=1.2)

NOTES:

- MATERIAL AND PLATING:**
Housing: LCP+30%G.F/PA9T+30%G.F (300C) HF,UL94V-0,Blue.
Contact(4Pin): Phosphor Bronze,Gold flash And Plated Sn 100u"MIN.
Contact(5Pin): Brass,Gold flash And Plated Sn 100u"MIN .
Shell: Stainless Steel,Plated Ni 50u"MIN.
- MECHANICAL CHARACTERISTIC**
Mating Force: 35N(3.57Kgf) Max.
Unmating Force: 10N(1.02Kgf) Min.
Durability: 5,000 Cycles.
- ELECTRICAL CHARACTERISTIC**
Current Rating: 1.8A(Pin1,4),0.25A For Other Contacts.
Voltage Rating: 30V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min.
Dielectric Withstanding Voltage: 100V AC.
- TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- DATECODE INFORMATION:**
YYMMDD (Y:YEAR M:MONTH D:DATE)
- ORDER INFORMATION:**

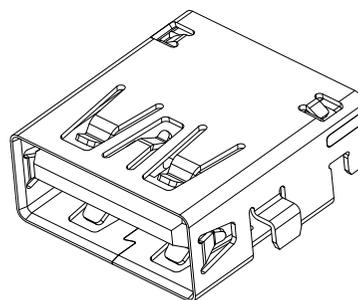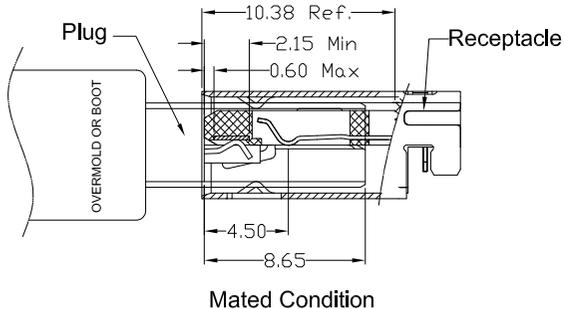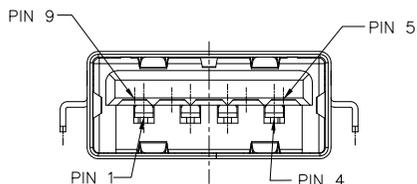

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	StdA_SSRX-
PIN6	StdA_SSRX+
PIN7	GND_DRAIN
PIN8	StdA_SSTX-
PIN9	StdA_SSTX+
Shell	Shield

					一般公差GENERAL TOLERANCE		绘图DR.		料号 PART NO.		文件编号 NUMBER		 JCTC ® TERMINAL&CONNECTORS	
					X.X ±0.30	X' ±2'	校对CHK.		W-N3-CH011-TXXX		ENDPT01			
					X.XX ±0.20	X.X' ±1'	审核CHK.		品名TITLE		USB3.1 GEN2 AF R/A Type CH=0.11MM		比例SCALE	
					X.XXX ±0.10	▲ MAJOR DIM.	核准APPD.				1/1		SHEET 1/1	
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位UNIT	mm						版次 REV.		A1

