

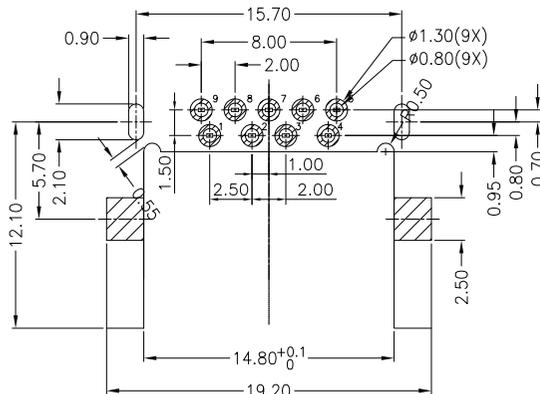

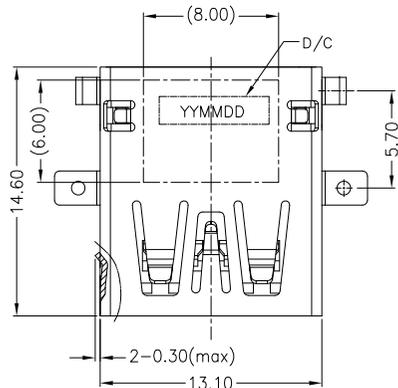
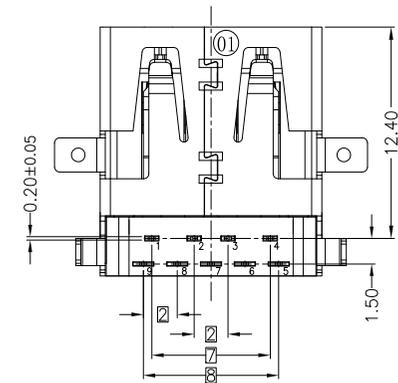




环保物料

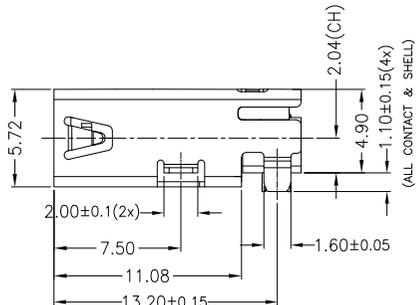

RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCES:±0.05 (t=1.2)

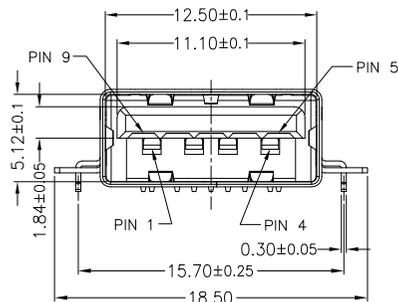


Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	StdA_SSRX-
PIN6	StdA_SSRX+
PIN7	GND_DRAIN
PIN8	StdA_SSTX-
PIN9	StdA_SSTX+
SheII	Shield



- NOTES:
- MATERIAL AND PLATING:
Housing:PA9T+30%G.F,UL94V-0,Blue.
Contact: Phosphor Bronze,Au And Sn Plated.
Shell: Stainless Steel,Ni Plated.
 - MECHANICAL CHARACTERISTIC
Mating Force: 35N(3.57Kgf) Max.
Unmating Force: 10N(1.02Kgf) Min.
Durability: 5,000 Cycles.
 - ELECTRICAL CHARACTERISTIC
Current Rating: 1.8A(Pin1,4),
0.25A For Other Contacts.
Voltage Rating: 30V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min.
Dielectric Withstanding Voltage: 100V AC.
 - TEMPERATURE
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
 - DATECODE INFORMATION:
YYMMDD (Y:YEAR M:MONTH D:DATE)
 - ORDER INFORMATION:
W-N3-CH204-XX Z


Solder Area plating on contacts
7: Tin G: G/F
Contact Area plating on contacts
00: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

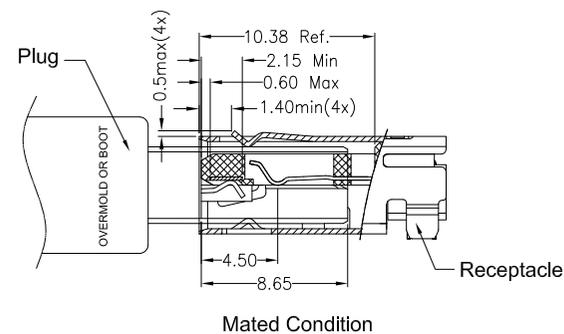

一般公差GENERAL TOLERANCE

X.X	±0.30	X'	±2°
X.XX	±0.20	X.X'	±1°
X.XXX	±0.10	▲	MAJOR DIM.

单位UNIT
mm



绘图 DR.
校对 CHK.
审核 CHK.
核准 APPD.

料号 PART NO.
W-N3-CH204-XX7

文件编号 NUMBER
ENDPT01

品名TITLE
USB3.0 AF R/A DIP TYPE CH=2.04

JGTC[®]
TERMINAL&CONNECTORS

比例SCALE
1/1

SHEET
1/1

版次REV.
A1

版次REV	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A2	21.07.14	更新图框发行	董东平	杨章雄
A1	20.01.02	按实物修改尺寸	董东平	杨章雄
A0	19.05.31	换图框发行	李兴泽	杨章雄

环保物料


PACKAGING INSTRUCTION I:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.



PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
W-N3-CH204-XX7	3500 (PCS)	350 (PCS)	10

1. QUANTITY: 350 PCS

2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

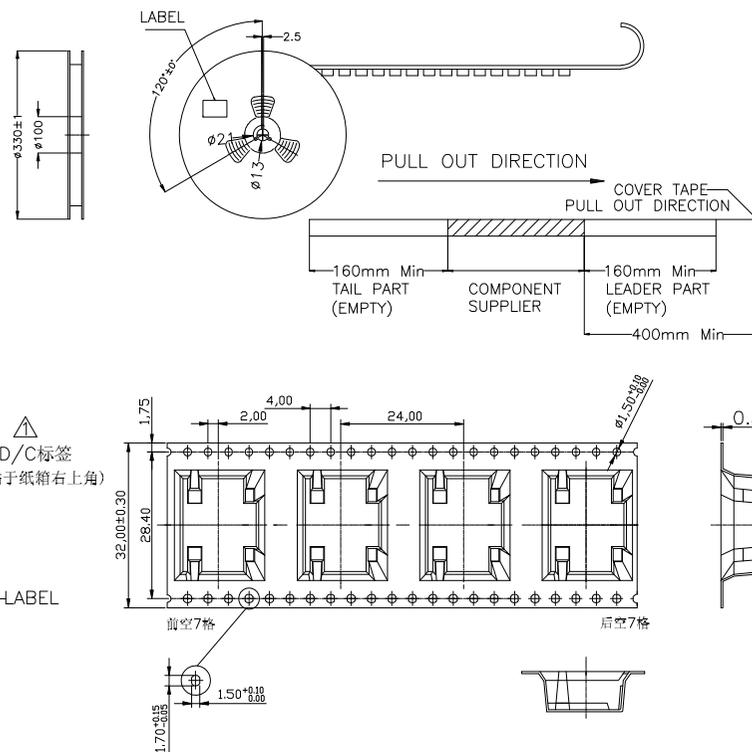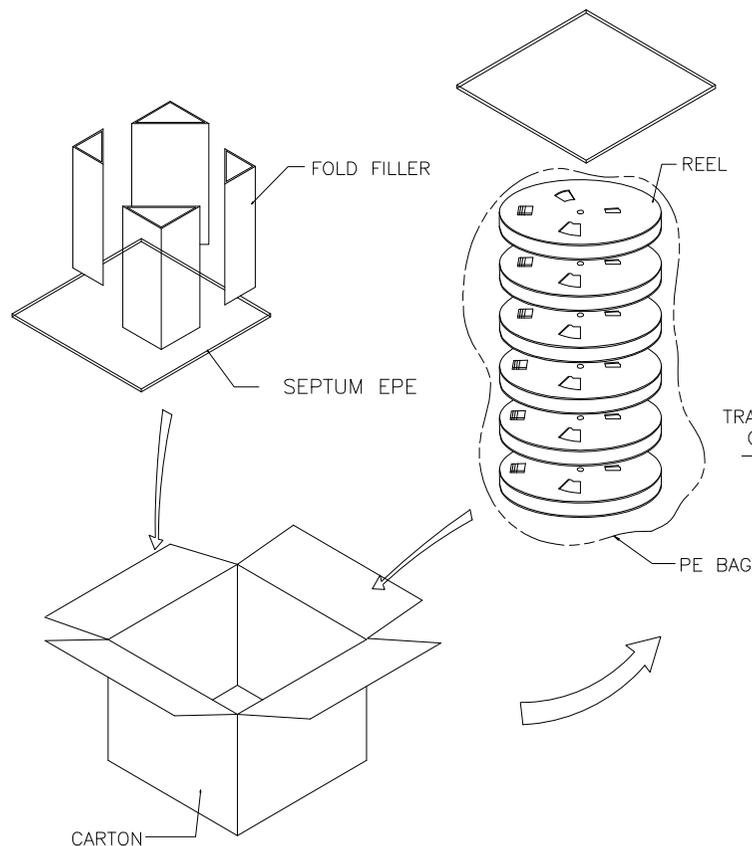

					一般公差 GENERAL TOLERANCE		绘图 DR. 李兴泽		料号 PART NO. W-N3-CH204-XX7	
					X.X ±0.30	X' ±2'	校对 CHK. 杨章雄		文件编号 NUMBER	
					X.XX ±0.20	X.X' ±1'	审核 CHK.		ENDPT01	
					X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		比例 SCALE	
A0	19.11.15	新图面发行	李兴泽	杨章雄	单位 UNIT		品名 TITLE		1/1	版次 REV.
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	mm		USB3.0 AF R/A DIP TYPE CH=2.04		1/1	A0

JCTC® 胜蓝科技股份有限公司
TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司

料号 PART NO. W-N3-CH204-XX7
文件编号 NUMBER
ENDPT01
比例 SCALE 1/1
SHEET 1/1
版次 REV. A0