

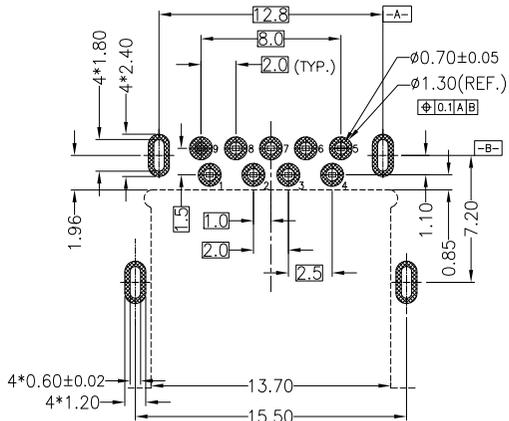


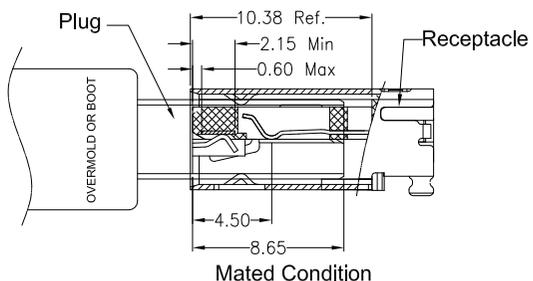



环保物料

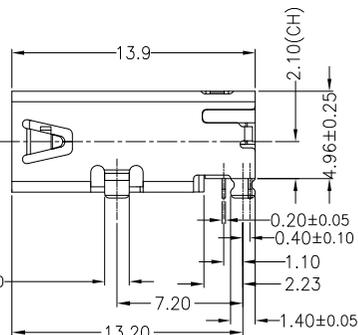

RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCES: ±0.05

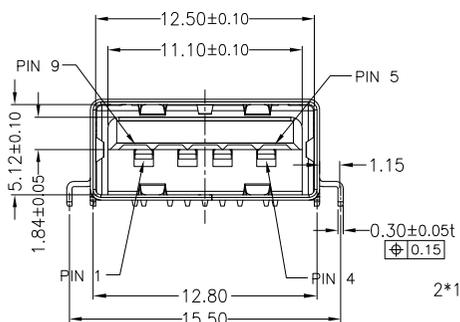

NOTES:

- MATERIAL AND PLATING:
Housing: PA9T+30%G.F (300C) HF,UL94V-0,Blue.
Contact(4Pin): Phosphor Bronze,Gold flash And Plated Sn 100u"MIN.
Contact(5Pin): Brass,Gold flash And Plated Sn 100u"MIN .
Shell: Stainless Steel,Plated Ni 50u"MIN.
- MECHANICAL CHARACTERISTIC
Mating Force: 35N(3.57Kgf) Max.
Unmating Force: 10N(1.02Kgf) Min.
Durability: 5,000 Cycles.
- ELECTRICAL CHARACTERISTIC
Current Rating: 2.5A(Pin1,4),
0.25A For Other Contacts.
Voltage Rating: 30V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min.
Dielectric Withstanding Voltage: 100V AC.
- TEMPERATURE
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- DATECODE INFORMATION:
YYMMDD (Y:YEAR M:MONTH D:DATE)
- ORDER INFORMATION:
W-N3-CH210-T XX

Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"
Solder Area plating on contacts
T: Tin

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	StdA_SSRX-
PIN6	StdA_SSRX+
PIN7	GND_DRAIN
PIN8	StdA_SSTX-
PIN9	StdA_SSTX+
Shell	Shield

				一般公差GENERAL TOLERANCE		绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	JCTC® TERMINAL&CONNECTORS			
				X.X ±0.30	X' ±2'	校对 CHK.		W-N3-CH210-TXX	ENDPT01				
A1		21.09.06	更新图框发行	董东平	杨章雄	X.XX ±0.20	X.X' ±1'	品名TITLE			比例SCALE	SHEET	版次REV.
A0		19.11.26	新图面发行	李兴泽	杨章雄	X.XXX ±0.10	▲ MAJOR DIM.	USB3.0 Rece. A Type 90° DIP Type CH=2.10MM			1/1	1/1	A1
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位UNIT	mm							

环保物料


PACKAGING INSTRUCTION I:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.




PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
W-N3-CH210-TXX	4000 (PCS)	400 (PCS)	10

1. QUANTITY: 400 PCS

2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

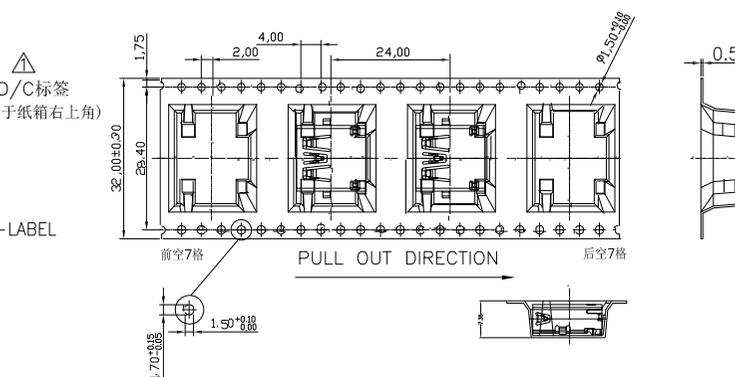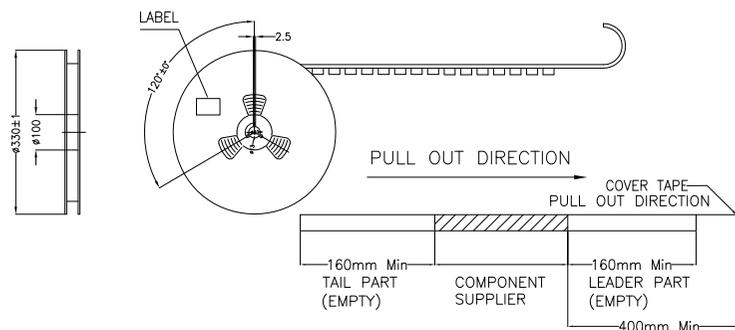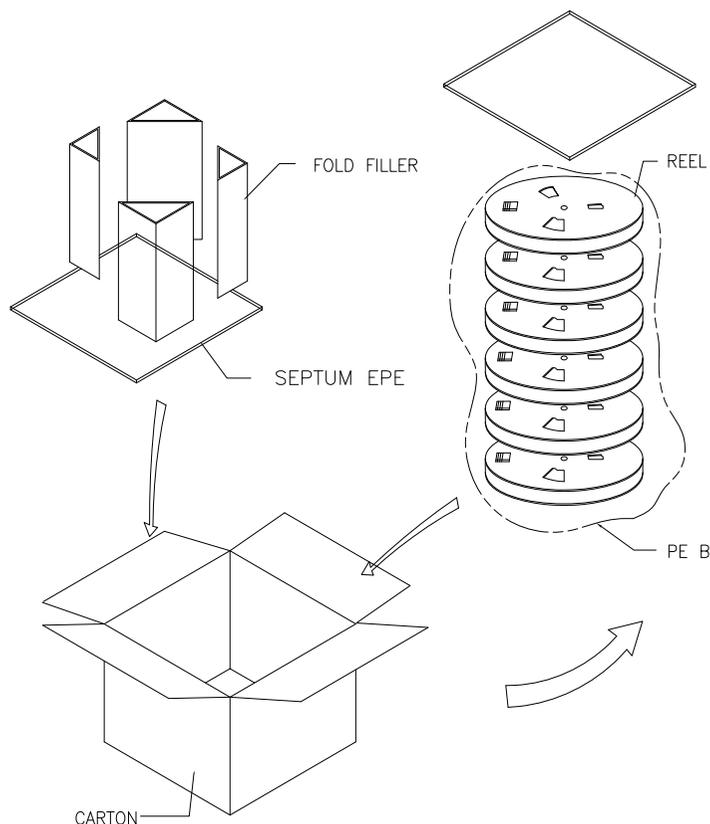

版次REV			日期 DATE			变更内容 DESCRIPTION			审核 CHK.		核准 APPD.		单位UNIT		mm		绘图 DR.		料号 PART NO.		文件编号 NUMBER		比例SCALE			SHEET		版次 REV.	
A1			21.09.06			更新图框发行			董东平		杨章雄		X.X ±0.30		X' ±2'		李兴泽		W-N3-CH210-TXX		ENDPT01		1/1			1/1		A1	
A0			19.11.15			新图面发行			李兴泽		杨章雄		X.XX ±0.20		X.X' ±1'		李兴泽		USB3.0 Rece. A Type 90° DIP Type CH=2.10MM				1/1			1/1		A1	
A0			19.11.15			新图面发行			李兴泽		杨章雄		X.XXX ±0.10		▲ MAJOR DIM.		李兴泽						1/1			1/1		A1	

