

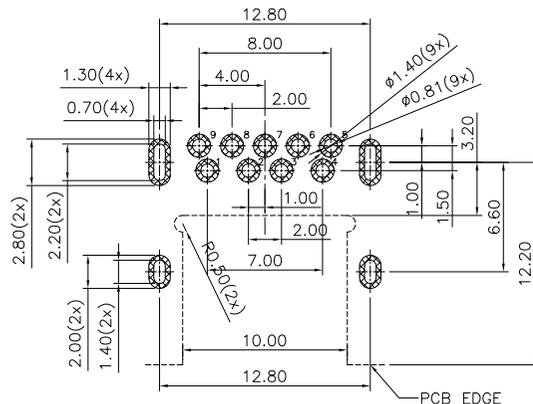
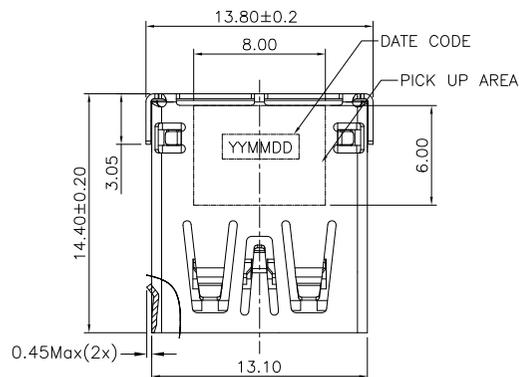
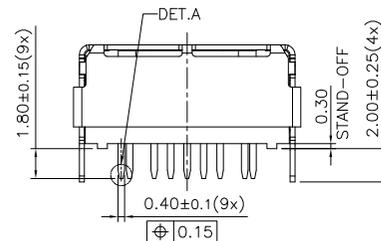


环保物料




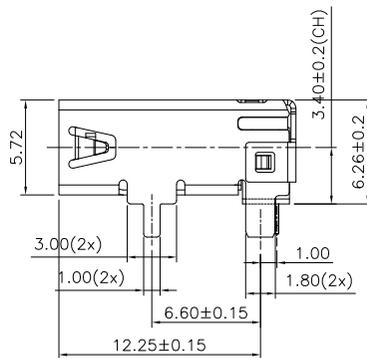


RECOMMENDED PCB LAYOUT (TOP VIEW)  
GENERAL TOLERANCES:±0.05 (t=1.0)

- NOTES:
- MATERIAL:  
Housing: PA9T+30%G.F.UL94V-0,Black.  
Contact: Copper Alloy.  
Shell: Stainless Steel.
  - PLATING:  
Contact: Au Plated on Contact Area,  
Matt-Sn 100u" Plated on Solder Tails.  
Ni 50u" min UnderPlated.  
Shell: Ni 80u"min Plated All Over
  - MECHANICAL CHARACTERISTIC  
Mating Force: 35N(3.57Kgf) max.  
Unmating Force: 9.8N(1Kgf) min.  
Durability: 5000 Cycles.
  - ELECTRICAL CHARACTERISTIC  
Contact Resistance: 30m Ohm Max.  
Insulation Resistance: 1000M Ohm Min  
Dielectric Withstanding Voltage: 500V AC Min
  - TEMPERATURE  
Openrating Temperature: -40°C~+85°C  
Storage Temperature: -60°C~+105°C
  - ORDER INFORMATION:  
W-N3-CH340-FXX

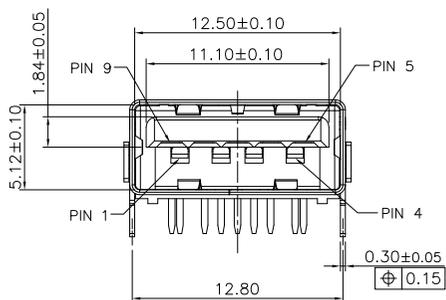

Contact Area plating on contacts  
01: G/F 03: Au 3u"  
05: Au 5u" 10: Au 10u"  
15: Au 15u" 30: Au 30u"

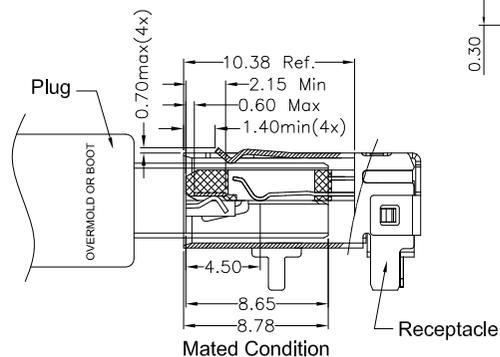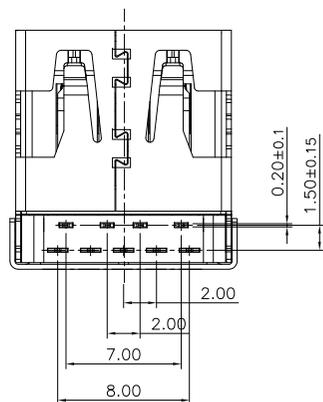

| Contact Number | Signal Name |
|----------------|-------------|
| PIN1           | VBUS        |
| PIN2           | D-          |
| PIN3           | D+          |
| PIN4           | GND         |
| PIN5           | StdA_SSRX-  |
| PIN6           | StdA_SSRX+  |
| PIN7           | GND_DRAIN   |
| PIN8           | StdA_SSTX-  |
| PIN9           | StdA_SSTX+  |
| Shell          | Shield      |


|        |         |                  |         |          |                       |              |         |  |                            |     |                          |     |                         |    |         |  |
|--------|---------|------------------|---------|----------|-----------------------|--------------|---------|--|----------------------------|-----|--------------------------|-----|-------------------------|----|---------|--|
|        |         |                  |         |          | 一般公差GENERAL TOLERANCE |              | 绘图DR.   |  | 料号 PART NO.                |     | 文件编号 NUMBER              |     | <br>TERMINAL&CONNECTORS |    |         |  |
|        |         |                  |         |          | X.X ±0.30             | X' ±2'       | 校对CHK.  |  | W-N3-CH340-FXX             |     | ENDPT01                  |     |                         |    |         |  |
|        |         |                  |         |          | X.XX ±0.20            | X.X' ±1'     | 审核CHK.  |  | 品名TITLE                    |     | USB3.1 A TYPE RECEPTACLE |     | 比例SCALE                 |    |         |  |
|        |         |                  |         |          | X.XXX ±0.10           | ▲ MAJOR DIM. | 核准APPD. |  | RIGHT ANGLE DIP C/H=3.40mm |     | 1/1                      |     | SHEET                   |    | 版次 REV. |  |
| 版次REV. | 日期 DATE | 变更内容 DESCRIPTION | 审核 CHK. | 核准 APPD. | 单位UNIT                | mm           |         |  |                            | 1/1 |                          | 1/1 |                         | A1 |         |  |

# 环保物料

## PACKAGING INSTRUCTION I:


1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON  
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED  
IN THE CHART.

| PRODUCT P/N    | PARTS PER SHIPPING CARTON | PARTS PER REEL (S.P.Q.) | TOTAL REELS PER PRIMARY CARTON |
|----------------|---------------------------|-------------------------|--------------------------------|
| W-N3-CH340-FXX | 4000 (PCS)                | 400 (PCS)               | 10                             |


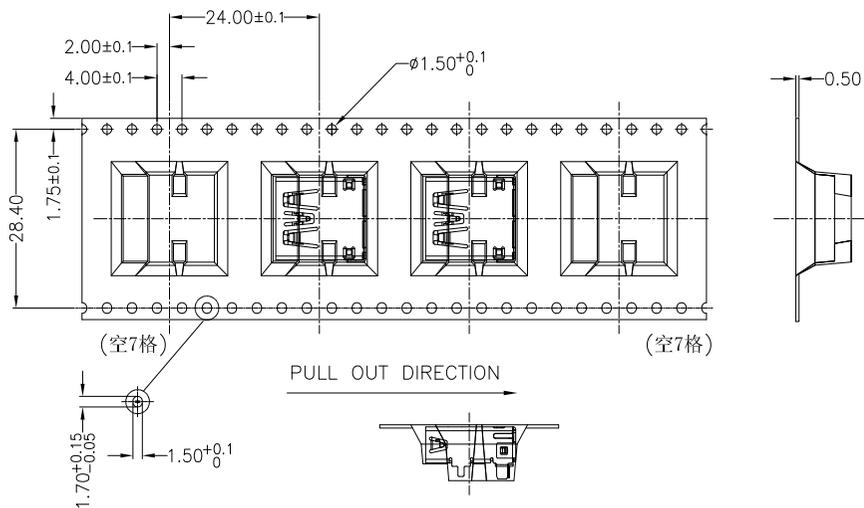


1. QUANTITY: 400 PCS

2. COVER TAPE PEELING FORCE:




3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

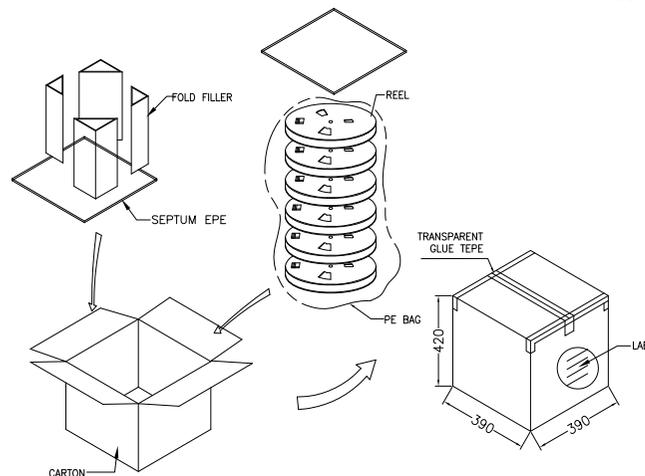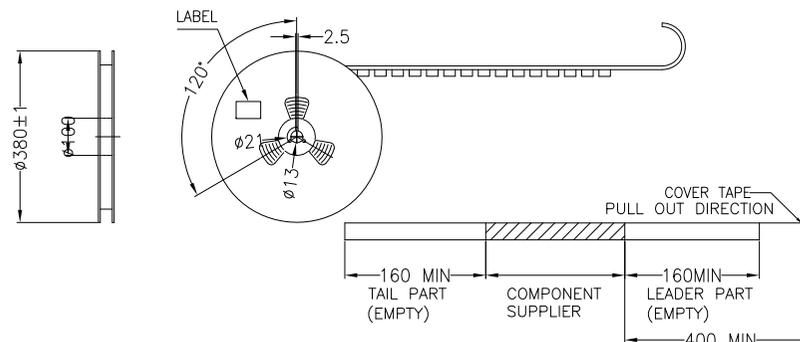

### 一般公差 GENERAL TOLERANCE

|       |       |      |            |
|-------|-------|------|------------|
| X.X   | ±0.30 | X'   | ±2'        |
| X.XX  | ±0.20 | X.X' | ±1'        |
| X.XXX | ±0.10 | ▲    | MAJOR DIM. |

单位 UNIT  
mm



绘图 DR.  
校对 CHK.  
审核 CHK.  
核准 APPD.

料号 PART NO.  
W-N3-CH340-FXX

文件编号 NUMBER  
ENDPT01

品名 TITLE  
USB3.1 A TYPE RECEPTACLE  
RIGHT ANGLE DIP C/H=3.40mm

**JCTC**®  
TERMINAL&CONNECTORS

|          |       |         |
|----------|-------|---------|
| 比例 SCALE | SHEET | 版次 REV. |
| 1/1      | 1/1   | A1      |

| 版次 REV. | 日期 DATE  | 变更内容 DESCRIPTION | 审核 CHK. | 核准 APPD. |
|---------|----------|------------------|---------|----------|
| A1      | 21.07.15 | 更新图框发行           | 董东平     | 杨章雄      |
| A0      | 20.04.26 | 新图面发行            | 李兴泽     | 杨章雄      |