

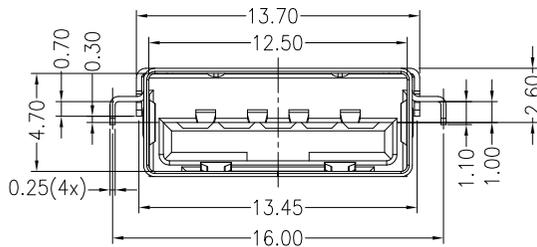
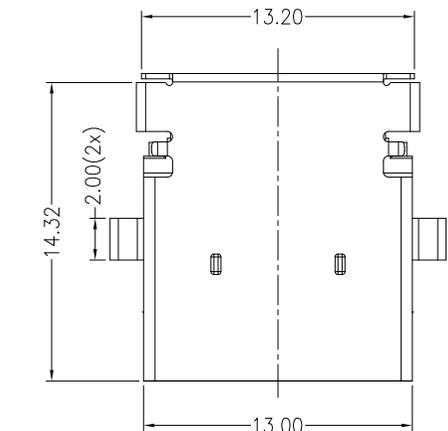
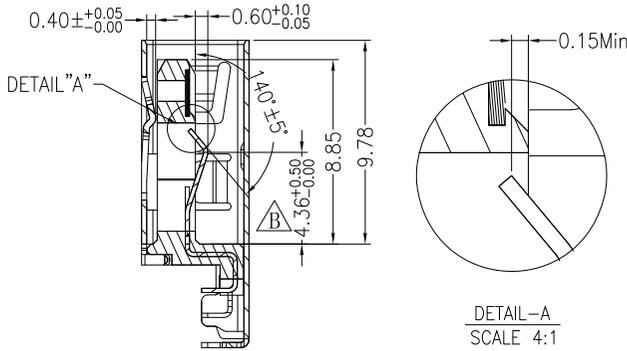
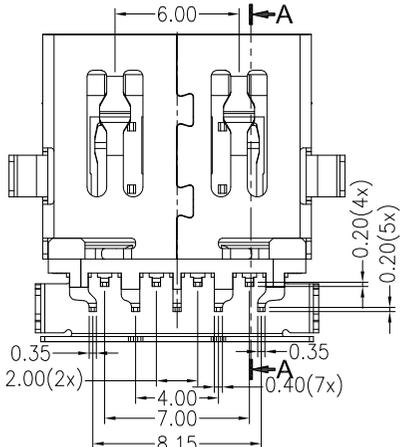


环保物料

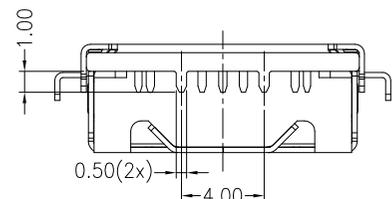

PIN	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	VBUS	POWER	SECOND
2	D-	USB 2.0 DIFFERENTIAL PAIR	THIRD
3	D+	DIFFERENTIAL PAIR	
4	GND	GROUND FOR POWER RETURN	SECOND
5	StdA_SSRX-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR	LAST
6	StdA_SSRX+		
7	GND_DRAIN	GROUND FOR SIGNAL RETURN	
8	StdA_SSTX-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR	FRIST
9	StdA_SSTX+		
Shell	Shield	CONNECTOR METAL SHELL	

NOTE:  
 1.MATERIAL:  
 1.1 INSULATOR:LCP130I UL94V-0;Blue  
 1.2 CONTACT:C5210-EH(T=0.20mm)  
 1.3 SHELL:SUS304-1/2H(T=0.25mm)  
 2.ELECTRICAL CHARACTERISTICS;  
 2.1 CONTACTRESISTANCE:30mΩ Max  
 2.2 CONTACT CURRENT RATING:1.5A  
 2.3 DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.  
 2.4 INSULATION RESISTANCE 100 MEGOHMS Min  
 2.5 OPERATING TEMPEROTURE:-40°C ~ 85°C  
 3 MECHANICAL CHARACTERISTICS:  
 3.1 MATING FORCE:25 N Max  
 3.2 UNMATED FORCE:7N~20N INITIAL; 1000CYCLES:CHANGE NO MORE THAN 50% FROM INITIAL, 10000CYCLES: FUNCTION OK.  
 3.3 DURABILITY:10,000 CYCLES

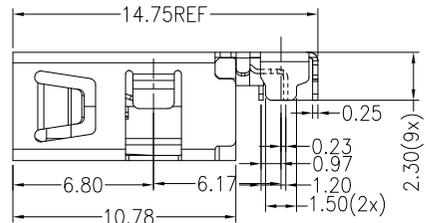




SEC.A-A

DETAIL-A SCALE 4:1


NO.	PARTS	Q'TY	MATERIAL	PLATING&COLOUR
3	SHELL	1	SUS304-1/2H T=0.25mm	ALL OVER Ni
2	TERMINAL	9	C5210-EH,T=0.20mm	Au ON CONTACT ARER Sn 100 u"ON SOLDER AREA ALL OVER Ni 50 u" Min
1	HOUSING	1	LCP130I UL94 V-0	BLUE

版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位UNIT	mm	一般公差GENERAL TOLERANCE	绘图 DR.	李兴泽	JCTC® 胜蓝科技股份有限公司	料号 PART NO.	文件编号 NUMBER	比例SCALE	SHEET	版次 REV.
A0	19.05.07	换图框发行	李兴泽				X.X ±0.30 X.XX ±0.20 X.XXX ±0.10	X' ±2' X.X' ±1' ▲ MAJOR DIM.	校对 CHK. 审核 CHK. 核准 APPD.	TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	W-N3-CL100-B15	ENDPT01	1/1	1/1	A0
										品名TITLE	USB3.0 SLIM REVERSE DIP TYPE CL1.0				

环保物料

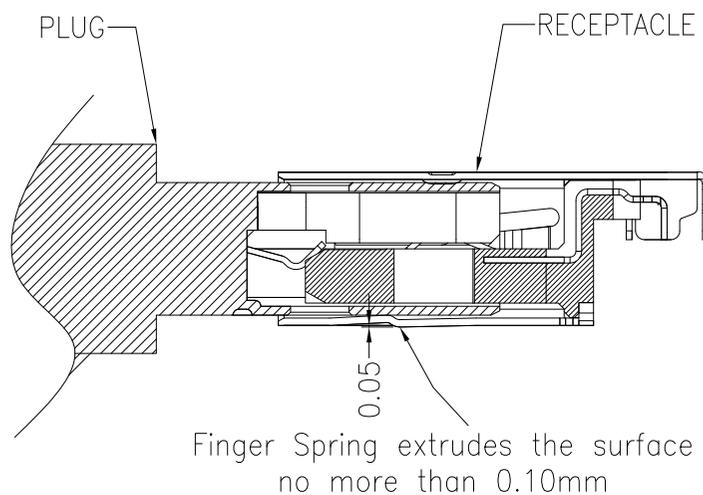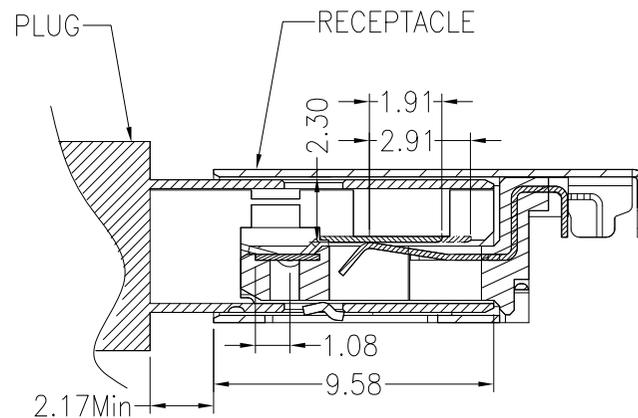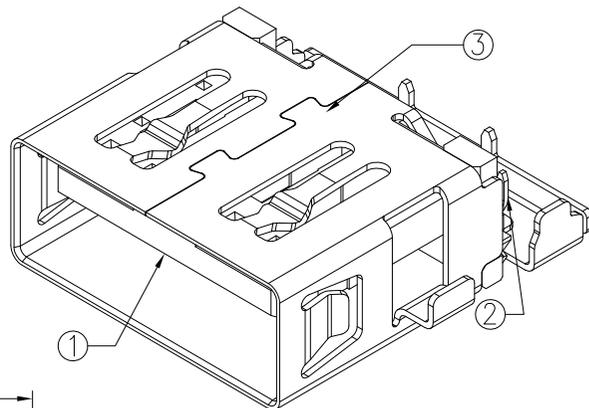

MATING DRAWING

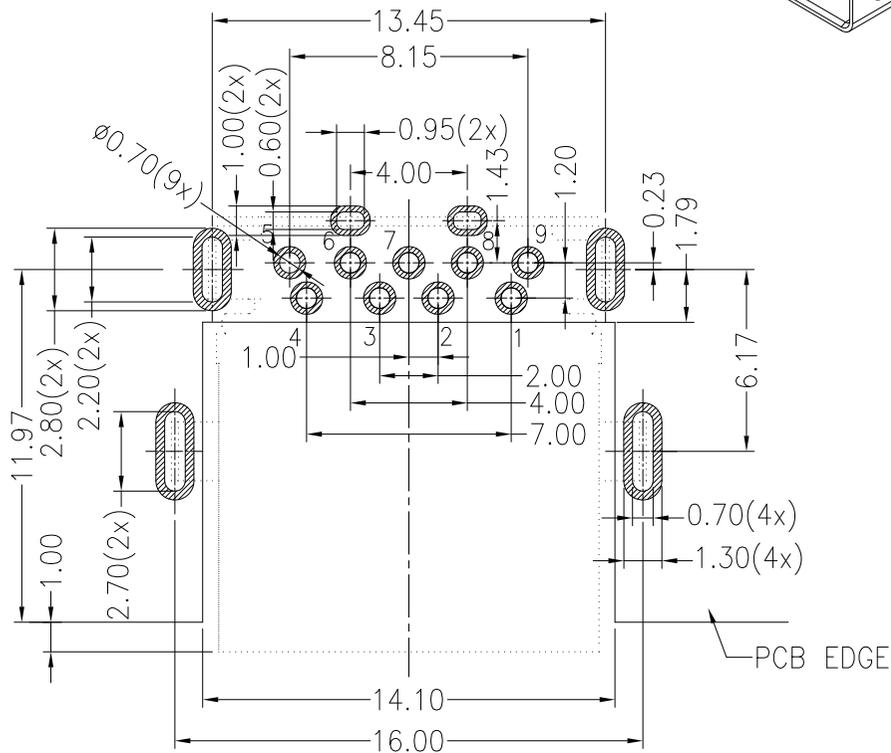

TOLERANCE:  $\pm 0.05$ , THICKNESS: 0.7mm  
RECOMMENDED PCB LAYOUT

				一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽	JCTC® 胜蓝科技股份有限公司		料号 PART NO. W-N3-CL100-B15			
				X.X $\pm 0.30$	X' $\pm 2^\circ$	校对 CHK.		TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司		文件编号 NUMBER ENDPT01			
				X.XX $\pm 0.20$	X.X' $\pm 1^\circ$	审核 CHK.		品名 TITLE		比例 SCALE		SHEET	版次 REV.
				X.XXX $\pm 0.10$	▲ MAJOR DIM.	核准 APPD.		USB3.0 SLIM REVERSE DIP TYPE CL1.0		1/1		1/1	A0
单位 UNIT	mm												
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.									
A0	19.05.07	换图框发行	李兴泽										

# 环保物料


## PACKAGING INSTRUCTION I:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON  
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED  
IN THE CHART.




PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
W-N3-CL100-B17	4000 (PCS)	400 (PCS)	10

1. QUANTITY: 400 PCS

2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

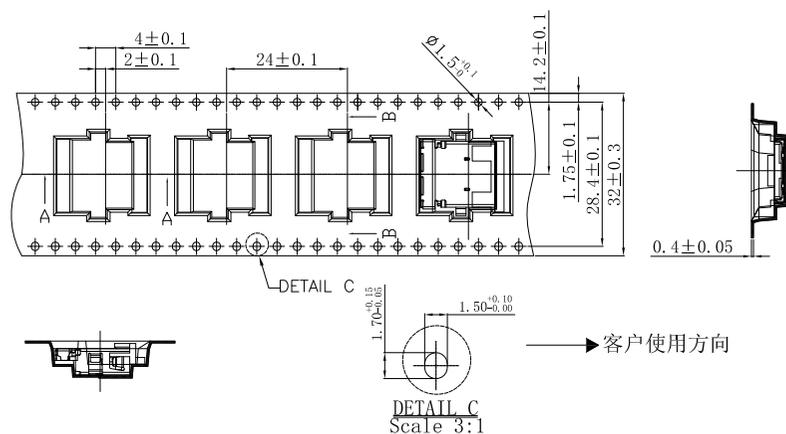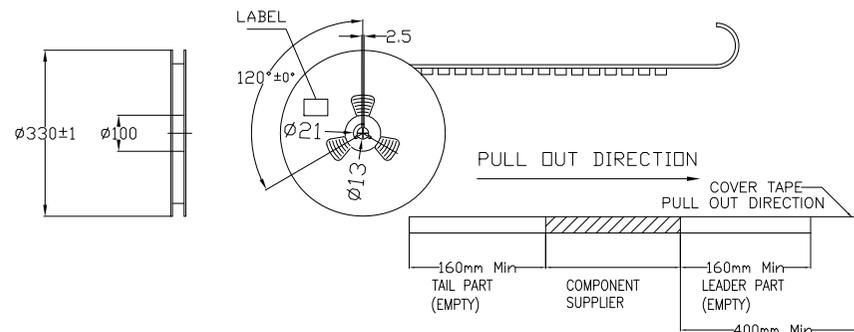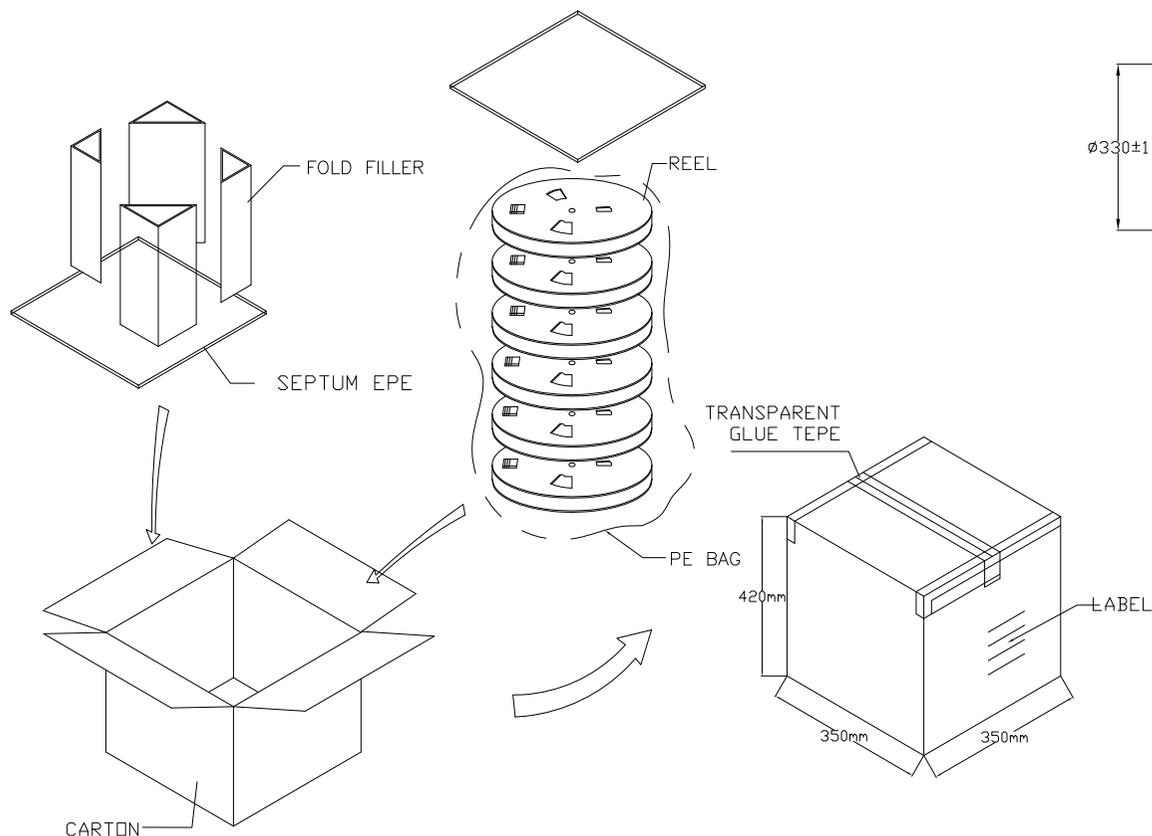

			一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司		料号 PART NO. W-N3-CL100-B17		
			X.X ±0.30	X' ±2'	校对 CHK.				文件编号 NUMBER ENDPT01		
			X.XX ±0.20	X.X' ±1'	审核 CHK.	品名 TITLE USB3.0 SLIM REVERSE DIP TYPE CL1.0	比例 SCALE		SHEET		版次 REV.
			X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		1/1		1/1		A1
A0	19.05.07	新图面发行	李兴泽	单位 UNIT	mm						
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.							