

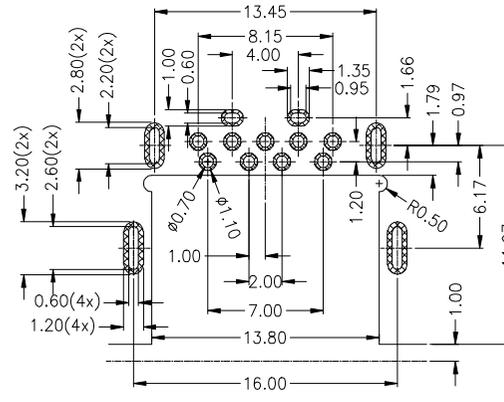
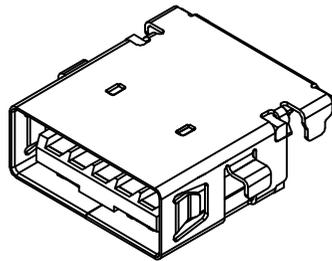
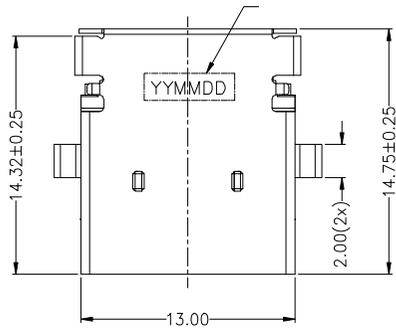
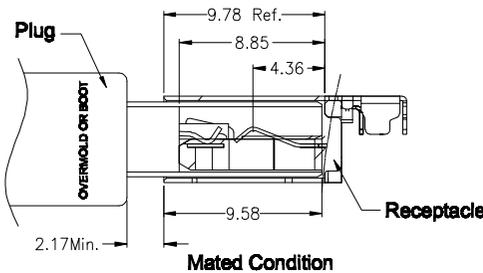
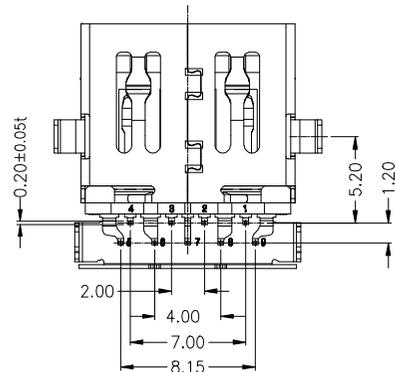
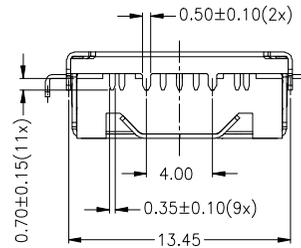


环保物料 HF

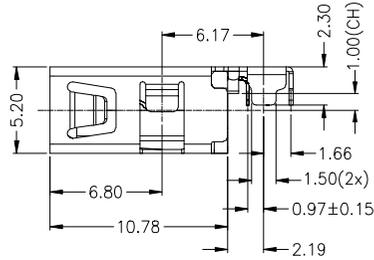


RECOMMENDED PCB LAYOUT (TOP VIEW)  
GENERAL TOLERANCES:T=0.70±0.05

- NOTES:
- MATERIAL:**  
Housing: High Temperature Plastic.UL94V-0,Blue.  
Contact: Copper Alloy.  
Shell: Stainless Steel.
  - PLATING:**  
Contact: Au Plated on Contact Area,  
Matt-Sn 100u" Plated on Solder Tails.  
Ni 50u" min UnderPlated.  
Shell: Ni 50u"Min Plated All Over
  - MECHANICAL CHARACTERISTIC**  
Mating Force: 25N max.  
Unmating Force: 7~20N(Initial);  
10000 Cycles: No More Than 50% Form Initial;  
10000 Cycles: Function Ok.  
Durability: 10000 Cycles.
  - ELECTRICAL CHARACTERISTIC**  
Current Rating: 1.5A  
Contact Resistance: 30m Ohm Max.  
Insulation Resistance: 1000M Ohm Min  
Dielectric Withstanding Voltage: 500V AC Min
  - TEMPERATURE**  
Operating Temperature: -40°C~+85°C  
Storage Temperature: -60°C~+105°C

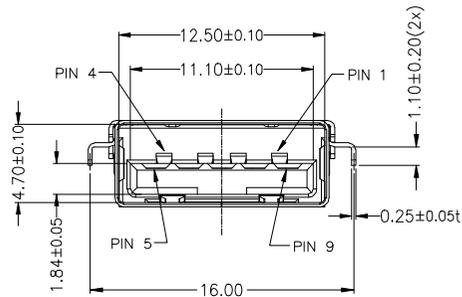

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	StdA_SSRX-
PIN6	StdA_SSRX+
PIN7	GND_DRAIN
PIN8	StdA_SSTX-
PIN9	StdA_SSTX+
Shell	Shield

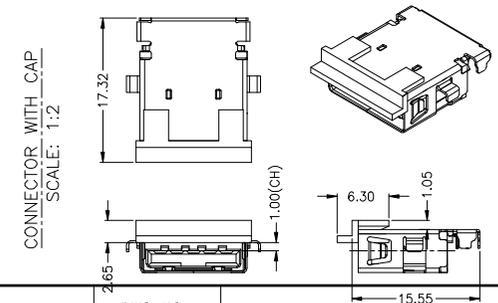

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
				LINEAR	ANGLES									
A0	新图面发行	20.06.23		0.0±0.30	X° REF±6°	1:1	Frey Yang	23.08.04	W-N3-CL100-B17	ENDE05	<b>JCTC</b> <sup>®</sup>			
A1	更新PCB LAYOUT	21.08.10		0.00±0.20	X° ±3°	APPROVED	Daniel Dong	23.08.04						
A2	更新PCB LAYOUT	21.08.16		0.000±0.10	X° X' ±2°	DESIGNER	Micky Ma	23.08.04						
A3	更新PCB LAYOUT	23.08.22	SIZE: A4			DRAWN			TITLE	USB3.0 A/F DIP RVS Type CH=-1.0mm Product	REV	A3	SHEET	1/1

# 环保物料


## PACKAGING INSTRUCTION:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON  
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED  
IN THE CHART.




PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
W-N3-CL100-B17	4000 (PCS)	400 (PCS)	10

1. QUANTITY: 400 PCS

2. COVER TAPE PEELING FORCE:

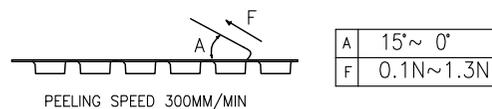

3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

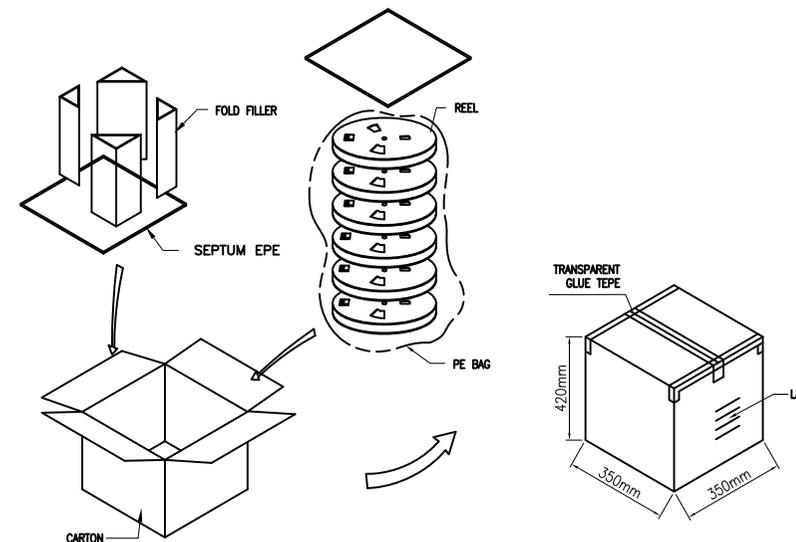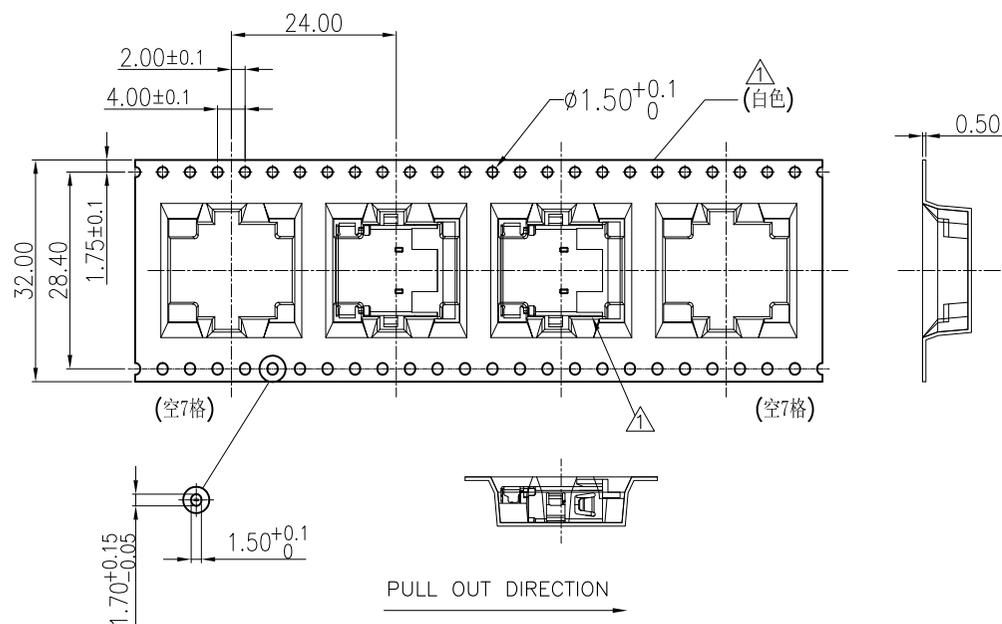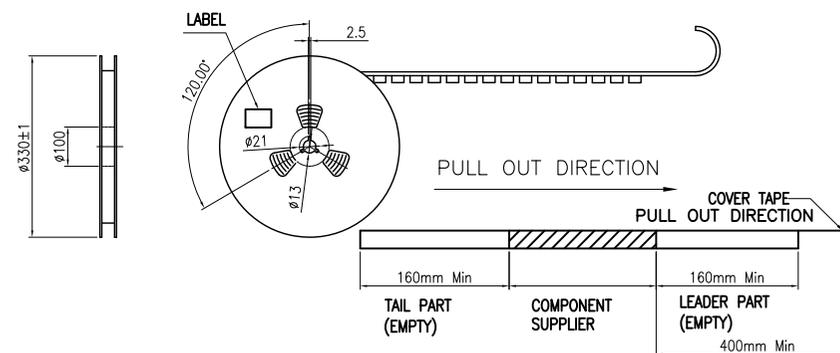

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 <b>JCTC</b> ® TERMINAL&CONNECTORS
A0	新图面发行	20.06.25 <th>LINEAR</th> <th>ANGLES</th> <th>APPROVED</th> <td>Frey Yang</td> <td>22.08.19</td> <td>W-N3-CL100-B17</td> <td>ENDE05</td>		LINEAR	ANGLES	APPROVED	Frey Yang	22.08.19	W-N3-CL100-B17	ENDE05	
A1	更新载带颜色	22.08.19 <th>0.00±0.25</th> <th>X° ±3°</th> <th>DESIGNER</th> <td>Daniel Dong</td> <td>22.08.19</td> <td colspan="2">TITLE</td>	0.00±0.25	X° ±3°	DESIGNER	Daniel Dong	22.08.19	TITLE			
			0.00±0.10	X° X' ±2°	DRAWN	Micky Ma	22.08.19	USB3.0 AF R/A DIP TYPE CH=1.0包装规范			
REV	A1	SHEET	1/1								