

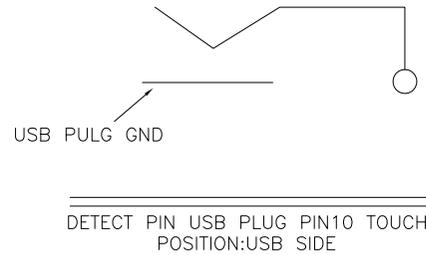
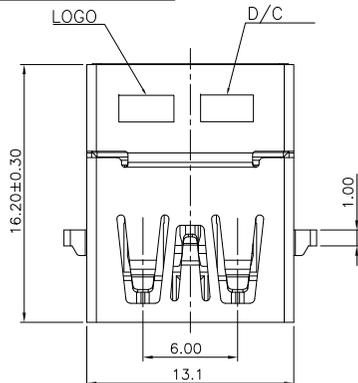
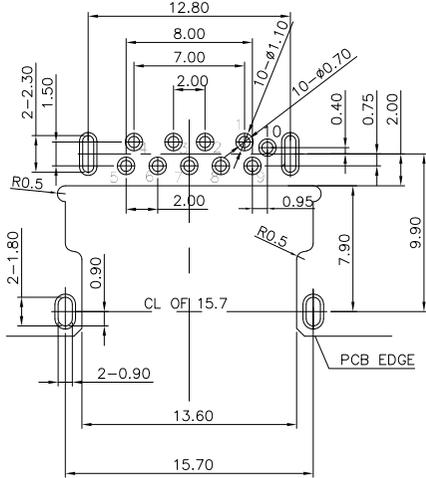

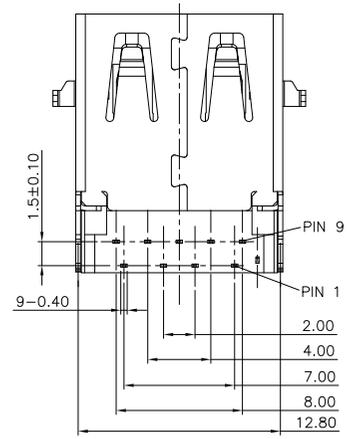



环保物料

检验规范

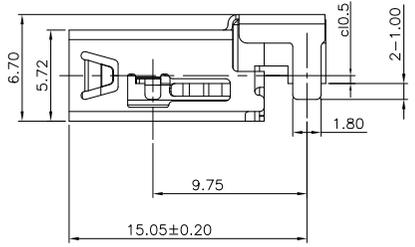



- NOTE:
- MATERIAL:
 - INSULATOR:LCP UL 94 V-0;BLACK
 - CONTACT:C5210 (T=0.20mm)
 - SHELL:SUS201 (T=0.30mm)
 - ELECTRICAL CHARACTERISTICS:
 - CONTACTRESISTANCE:30mΩ Max
 - CONTACT CURRENT RATING:1.5A
 - DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.
 - INSULATION RESISTANCE 100 MEGOHMS Min
 - OPERATING TEMPERATURE:-40° C ~ 85° C
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE:30 N Max
 - UNMATED FORCE:10 N Min INITIAL; 8 N Min AFTER TEST
 - DURABILITY:5,000 CYCLES
 - PLATING
 - TERMINAL CONTACT:G/F GOLD PLATING, ALL OVER 50u" MIN NICKEL AND 80u"MIN , Tin ALL OVER 50u" MIN NICKEL IN SOLDER AREA
 - SHELL:50u"MIN. NICKEL ALL OVER
 - PART NUMBER:

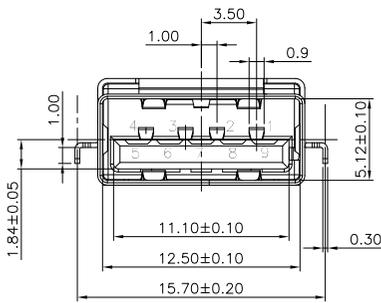



TOLERANCE: ±0.05, THICKNESS: 1.2mm
RECOMMENDED PCB LAYOUT (TOP VIEW)

Pin #	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	10 VBUS	POWER	SECOND
2	11 D-	USB 2.0 DIFFERENTIAL PAIR	THIRD
3	12 D+		
4	13 GND	GROUND FOR POWER RETURN	SECOND
5	14 StdA_SSRX-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR	LAST
6	15 StdA_SSRX+		
7	16 GND_DRAIN	GROUND FOR SIGNAL RETURN	
8	17 StdA_SSTX-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR	
9	18 StdA_SSTX+		
	Shield	CONNECTOR METAL SHELL	FRIST

A		B		C		D		E		F	
版次REV	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位UNIT mm	一般公差GENERAL TOLERANCE X.X ±0.25 X.XX ±0.20 X.XXX ±0.10	绘图 DR. 李兴泽	料号 PART NO. W-US11009-0A00	文件编号 NUMBER ENDPT01	JCTC® TERMINAL&CONNECTORS	
A0	21.09.06	更新图框发行	董东平	杨章雄		X' ±2' X.X' ±1' ▲ MAJOR DIM.	校对 CHK.	品名TITLE USB3 AF RVS CL0.50mm L16.2mm DIP TYPE		比例SCALE 1/1	版次 REV. A1
A0	17.11.20	新图面发行	李兴泽	杨章雄			审核 CHK.				
							核准 APPD.				

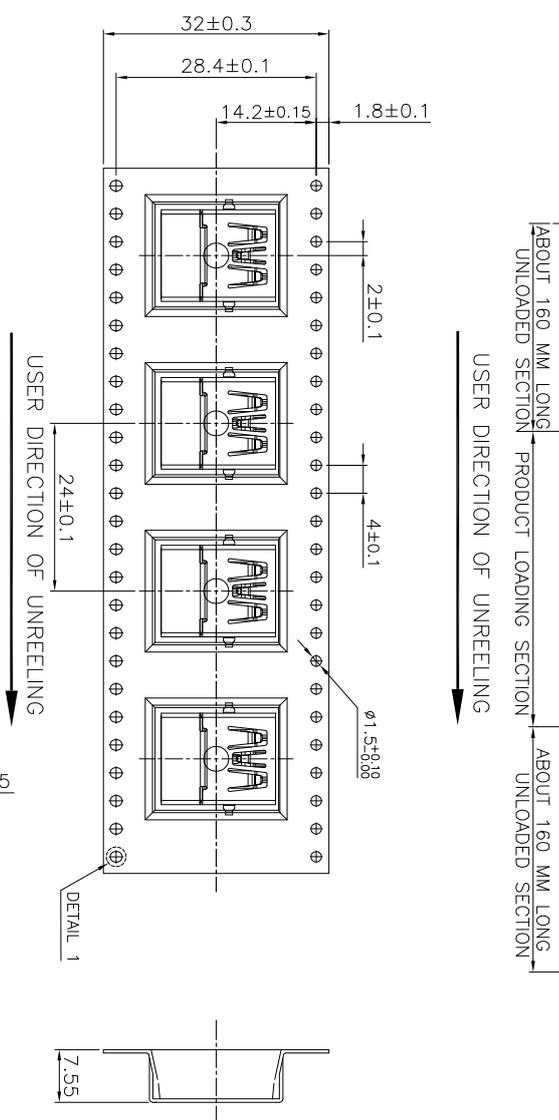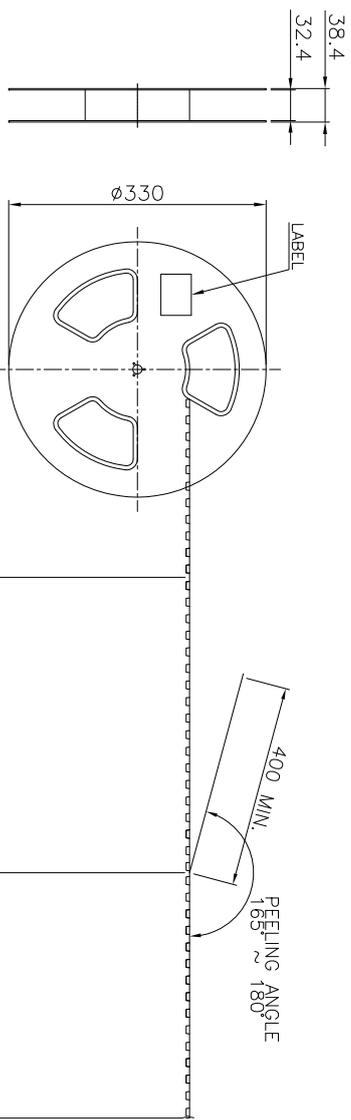

- NOTE:
- MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
 - PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
 - PEELING SPEED: 300 mm/min.
 - EACH BAG SHALL BE INCLUDED DESICCANT.

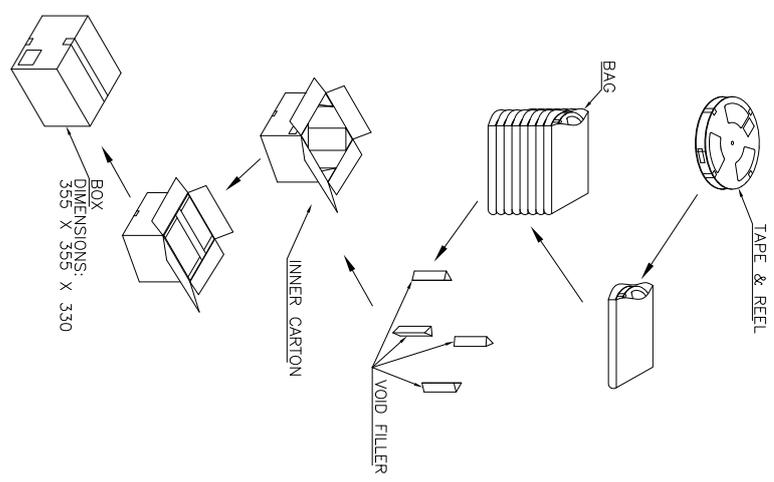

REEL	400	8	3200	PCS	---	KG	---	KG
CARTON	REELS/	QUANTITY	GROSS	NET	WEIGHT	WEIGHT		



版次/REV	日期	变更内容	DESCRIPTION	审核	CHK.	核准	APPD.	单位	UNIT	mm	一般公差	GENERAL TOLERANCE	绘图	DR.	李兴泽
A1	21.09.06	更新图框发行	董东平	杨章雄	XX	±0.25	X	±2°					校对		
A0	17.11.20	新图面发行	李兴泽	杨章雄	XXX	±0.20	X,X'	±1°					审核		

料号 PART NO.	W-US11009-0A00	文件编号 NUMBER	ENDDPT01
品名 TITLE	USB3.0 AF RVS CL0.50mm L16.2mm H2.4 DIP TYPE		

比例 SCALE	1/1	SHEET	1/1	版次 REV.	A1
----------	-----	-------	-----	---------	----