
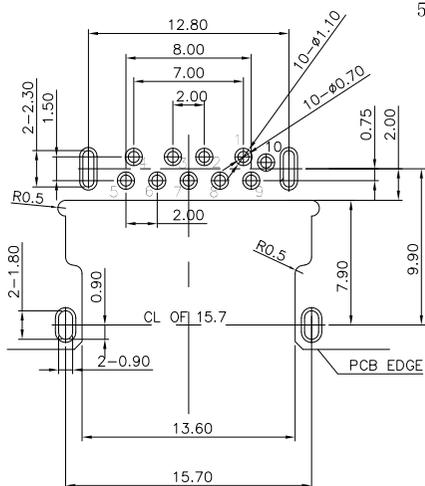

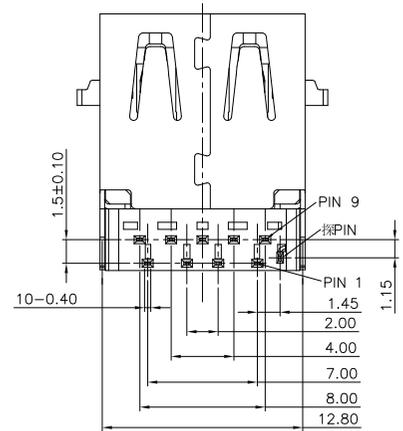

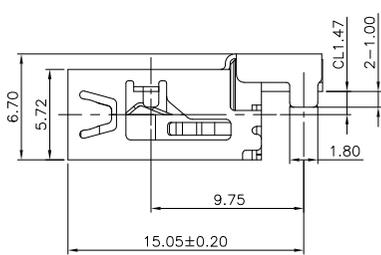
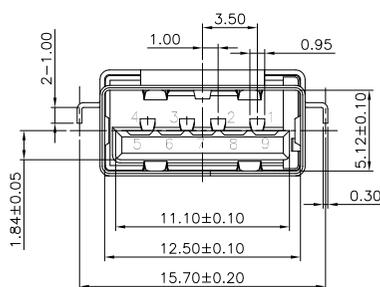
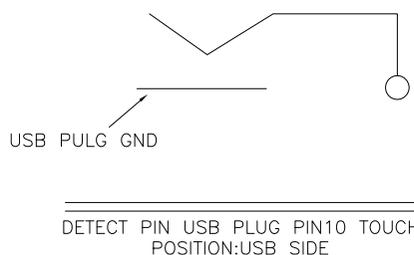


环保物料

检验规范

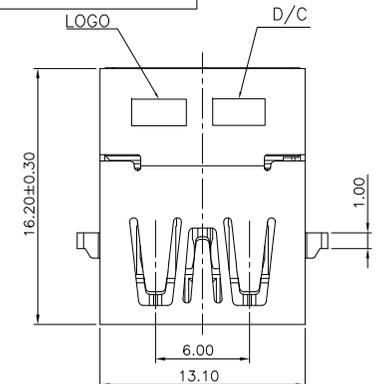




TOLERANCE: ±0.05, THICKNESS: 1.2mm
RECOMMENDED PCB LAYOUT
(TOP VIEW)

- NOTE:
- MATERIAL:
 - INSULATOR:HIGH TEMPERATURE PLASTIC UL 94 V-0;Black
 - CONTACT:COPPER ALLOY (T=0.20mm)
 - SHELL:SUS201 (T=0.30mm)
 - ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE:30mΩ Max
 - CONTACT CURRENT RATING:1.5A
 - DIELECTRIC WITHSTANDING VOLTAGE:500 V R. M. S.
 - INSULATION RESISTANCE 100 MEGOHMS Min
 - OPERATING TEMPERATURE:-40° C ~ 85° C
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE:30 N Max
 - UNMATED FORCE:10 N Min INITIAL; 8 N Min AFTER TEST
 - DURABILITY:5,000 CYCLES
 - PLATING
 - TERMINAL CONTACT:(SEE TAB) GOLD PLATING, ALL OVER 50u" MIN NICKEL AND 80u" MIN, Tin ALL OVER 50u" MIN NICKEL IN SOLDER AREA
 - SHELL:50u" MIN. NICKEL ALL OVER
 - PART NUMBER:

W-US11009-0A00
Pin Number: HF, REEL, Au 1u"


Pin #	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	10	VBUS POWER	SECOND
2	11	D- USB 2.0 DIFFERENTIAL PAIR	THIRD
3	12	D+	
4	13	GND GROUND FOR POWER RETURN	SECOND
5	14	StdA_SSRX- SUPERSPEED RECEIVER DIFFERENTIAL PAIR	
6	15	StdA_SSRX+	
7	16	GND_DRAIN GROUND FOR SIGNAL RETURN	LAST
8	17	StdA_SSTX- SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR	
9	18	StdA_SSTX+	
		Shield CONNECTOR METAL SHELL	FRIST

					一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER		 TERMINAL&CONNECTORS		
					X.X ±0.25	X' ±2'	校对 CHK.		W-US11109-0A00		ENDPT01				
					X.XX ±0.20	X.X' ±1'	审核 CHK.		品名 TITLE		USB3 AF RVS CL-1.44mm		比例 SCALE	SHEET	版次 REV.
					X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		L16.2mm DIP TYPE		1/1	1/1	A1		
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm	 								

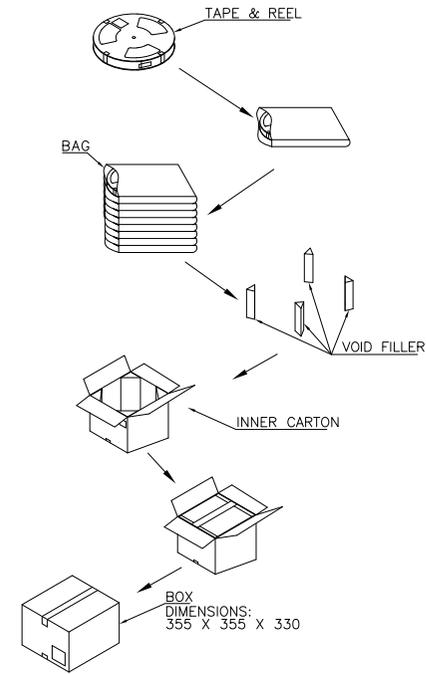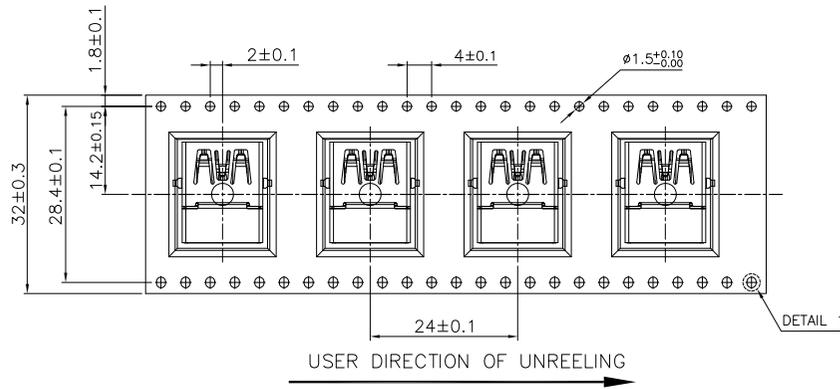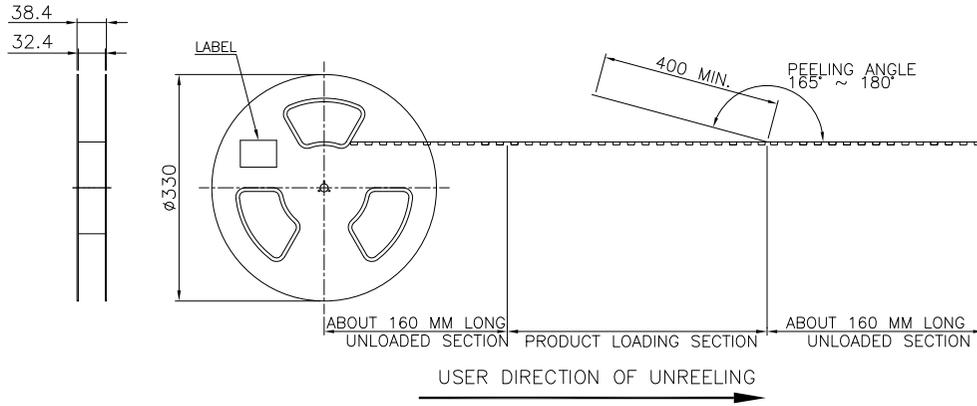

NOTE:

- MATERIAL:
 BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
 TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.
 REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
 BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.2-1.0N (20 ~ 100 GRAMS)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.



400	8	3200 PCS	-- KG	-- KG
REEL	REELS/CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

					一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER	
					X.X ±0.25	X' ±2'	校对 CHK.		W-US11109-0A00		ENDPT01	
					X.XX ±0.20	X.X' ±1'	审核 CHK.		品名 TITLE		USB3 AF RVS CL-1.44mm	
					X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		L16.2mm DIP TYPE		比例 SCALE	
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm					1/1	版次 REV.
A	21.07.21	更新图框发行	董东平	杨章雄							1/1	A1
A0	17.11.20	新图面发行	李兴泽	杨章雄								

JCTC ®		
TERMINAL&CONNECTORS		
1/1	1/1	A1