

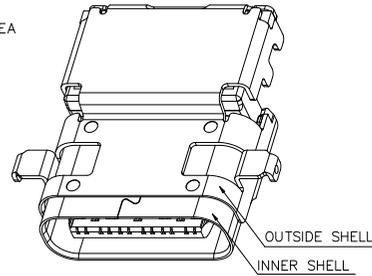
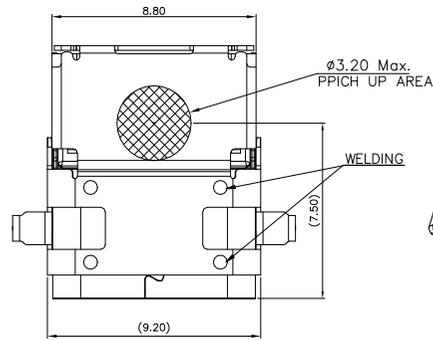
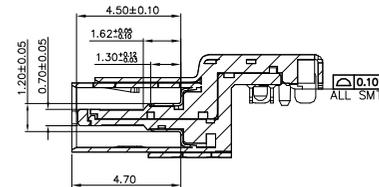
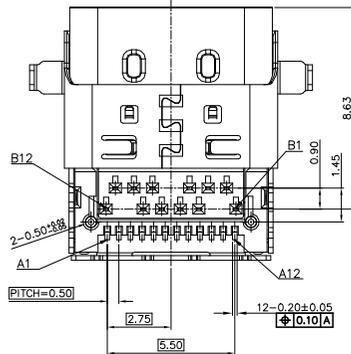
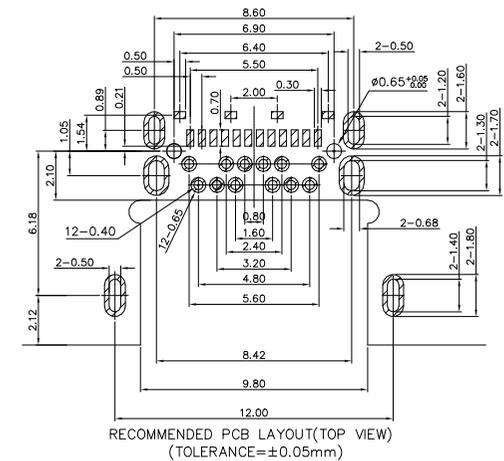
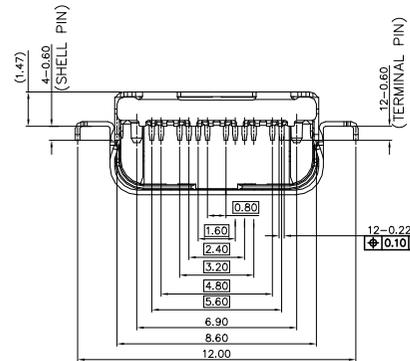



- NOTES:
- MATERIAL:
 - OUTSIDE SHELL: SUS301R-1/2H T=0.20mm
 - INNER SHELL: SUS301R-1/2H T=0.20mm
 - SIGNAL: SUS301R-1/2H T=0.10mm
 - RFI PAD: SUS301R-1/2H T=0.08mm
 - HOUSING: PA9T+45%G.F UL94-0 BLACK
 - TERMINAL: C19400 T=0.10mm
 - PLATING:
 - TERMINAL: SEE PIN
 - SHELL&SIGNAL&RFI PAD: NICKEL PLATED 50u"MIN.
 - ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 3.0 A
VOLTAGE RATING: 5.0 V
 - LLCR: VBUS& GND PINS: 40mΩ/PIN MAX
OTHER PINS : 40mΩ/PIN MAX
CHANGE OF ALL PINS: 10mΩ
 - INSULATION RESISTANCE: 100MΩ MIN.
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 0.5~2.0kg.
 - WITHDRAWAL FORCE: 0.8~2.0kg.(INITIAL) 0.5~2.0kg.(AFTER LIFE TEST)
 - LIFE TEST: 10000 CYCLES MIN

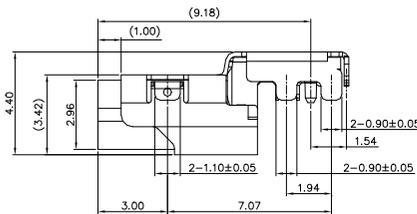

3D VIEW

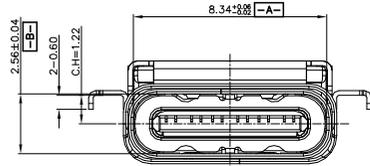

					一般公差 GENERAL TOLERANCE
					X.X ±0.35 X° ±6°
					X.XX ±0.25 X.X° ±3°
					X.XXX ±0.15 ▲ MAJOR DIM.
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核CHK.	核准APPD.	单位 UNIT mm



绘图 DR.
审核 CHK.
核准 APPD.

料号 PART NO.
W-USB-CH122-TC07

文件编号 NUMBER
ENDPW03

品名 TITLE
USB TYPE C (C.H=-1.22mm)

比例 SCALE
1:1

SHEET
1/1

版次 REV.
A0



1
2
3
4
5
6
7

1
2
3
4
5
6
7

8

8

A

B

C

D

E

F