


RoHS 2.0+HF

检验规范

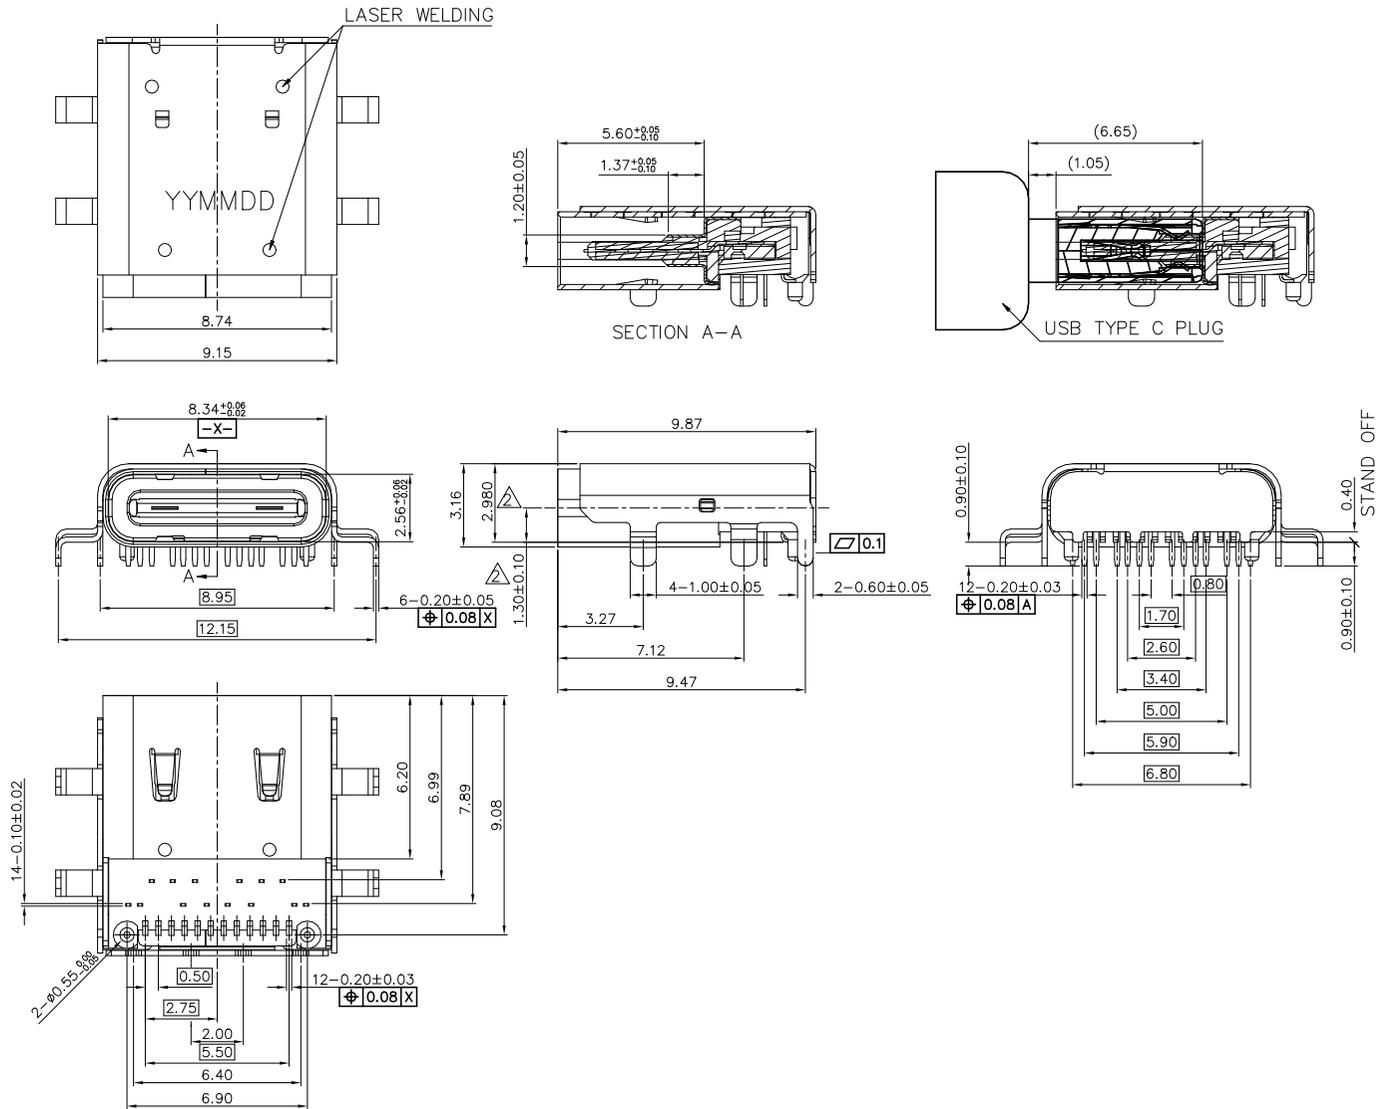

A0	18.01.04	新版发行	LXZ	LXZ	
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核CHK.	核准APPD.	


一般公差 GENERAL TOLERANCE	
X.X ±0.35	X° ±6°
X.XX ±0.25	X.X° ±3°
X.XXX ±0.15	▲ MAJOR DIM.
单位 UNIT	
mm	

绘图 DR.	
审核 CHK.	
核准 APPD.	

料号 PART NO.	文件编号 NUMBER
W-USB-CH130-TC04	ENDPW03
品名 TITLE	
USB TYPE C (C.H=1.30mm)	


JCTC ®		
比例 SCALE	SHEET	版次 REV.
1:1	1/2	A0

3D VIEW

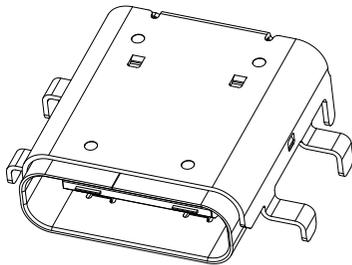

NOTES:

1. MATERIAL:
 - 1.1 OUTSIDE SHELL: SUS301R-1/2H T=0.20mm
 - 1.2 INNER SHELL: SUS301R-1/2H T=0.20mm
 - 1.3 SIGNAL: SUS301R-1/2H T=0.10mm
 - 1.4 RFI PAD: SUS304R-1/2H T=0.08mm
 - 1.5 HOUSING: LCP+30%G.F. UL94UL-0 BLACK
 - 1.6 TEMINARL: C19400-H T=0.10mm
2. PLATING:
 - 2.1 TERMINAL: SEE P/N
 - 2.2 SHELL: NICKEL PLATED 60u"MIN.
- 3.ELECTRICAL CHARACTERISTICS:
 - 3.1 CURRENT RATING: 5.0 A
VOLTAGE RATING: 20.0 V
 - 3.2 LLCR: VBUS& GND PINS: 40mΩ/PIN MAX
OTHER PINS : 40mΩ/PIN MAX
CHANGE OF ALL PINS: 10mΩ
 - 3.3 INSULATION RESISTANCE: 100MΩ MIN.
- 4.MECHANICAL CHARACTERISTICS:
 - 4.1 INSERTION FORCE: 0.5~2.0kg.
 - 4.2 WITHDRAWAL FORCE: 0.8~2.0kg.(INITIAL) 0.5~2.0kg.(AFTER LIFE TEST)
- 5.LIFE TEST: 10000 CYCLES MIN

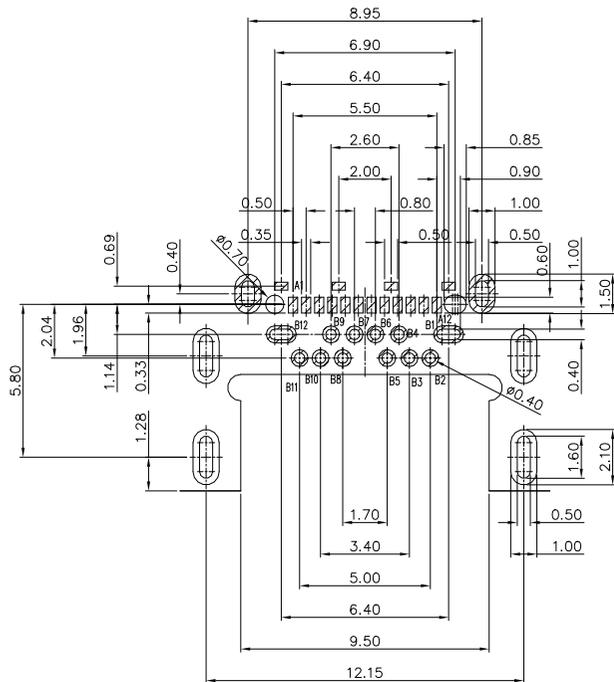


RECOMMENDED PCB LAYOUT(TOP VIEW)
(TOLERANCE=±0.03mm)

一般公差 GENERAL TOLERANCE

X.X	±0.35	X°	±6°
X.XX	±0.25	X.X°	±3°
X.XXX	±0.15	▲	MAJOR DIM.

单位 UNIT
mm



绘图
DR.

审核
CHK.

核准
APPD.

料号 PART NO.

W-USB-CH130-TC04

文件编号 NUMBER

ENDPW03

品名 TITLE

USB TYPE C (C.H=1.30mm)



比例 SCALE
1:1

SHEET
2/2

版次 REV.
A0

A0	18.01.04	新版发行	LXZ	LXZ
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.