
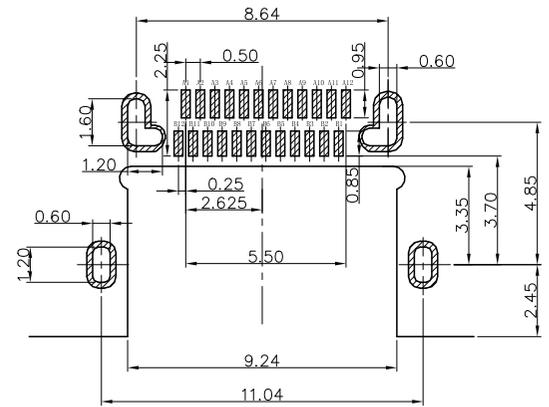
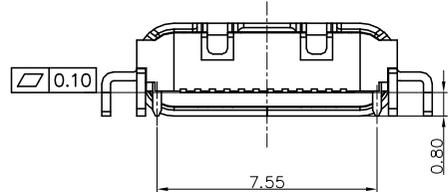

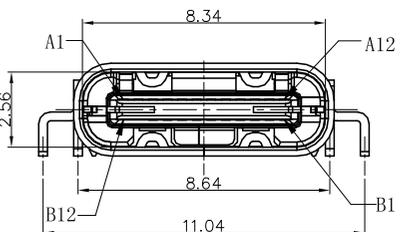
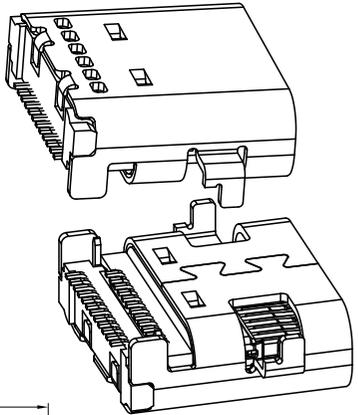


RoHS 2.0+HF

# 检验规范

- NOTES:  
SPECIFICATION:
1. CURRENT RATING: 3A MAX
  2. VOLTAGE: 100 VAC
  3. TEMPERATURE RANGE: -30 °C ~ 85 °C
  4. CONTACT RESISTANCE: 40 MILLIONHM MAX
  5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
  6. INSERTION FORCE : 5N~20N
  7. UNMATING FORCE: 8N~20N
  8. DURABILITY: 10,000 CYCLES

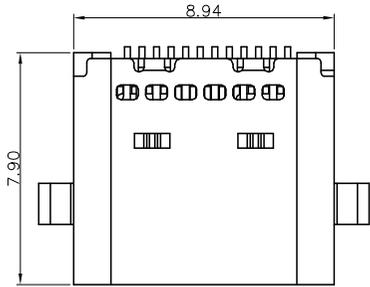

CONNECTOR FRONT EDGE

RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm  
TOLERANCE UNSPECIFIED ±0.05mm

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	SHELL	STAINLESS STEEL	Ni: 50u"Plated	1PCS
4	SPRING	STAINLESS STEEL	Ni: 50u"Plated	1PCS
3	SHIELDING PLATE	STAINLESS STEEL	Ni: 50u"/SN: 80-120u"Plated	1PCS
2	CONTACT	COPPER ALLOY	Au15u"/Ni: 50u"Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

			一般公差 GENERAL TOLERANCE		绘图 DR.	料号 PART NO.		文件编号 NUMBER		<b>JCTC</b> ®	
			X.X ±0.35	X° ±6°		W-USB-FH08-TC24		ENDPW10			
			X.XX ±0.25	X.X° ±3°	审核 CHK.	品名 TITLE					
			X.XXX ±0.15	▲ MAJOR DIM.		USB C F TYPE 沉板 0.8 CONN.					
AO	18.06.21	新图面发行	李兴泽	单位 UNIT	核准 APPD.	比例 SCALE		SHEET		版次 REV.	
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	mm		1:1		1/1		A0	