
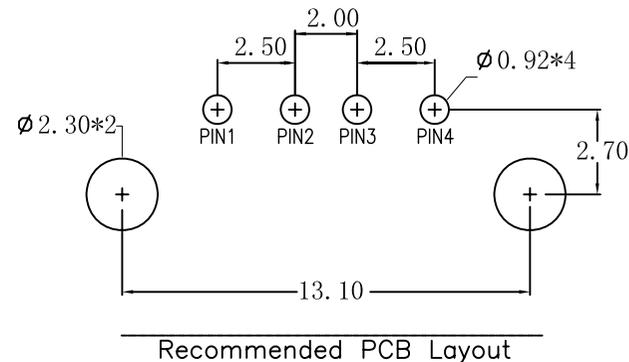
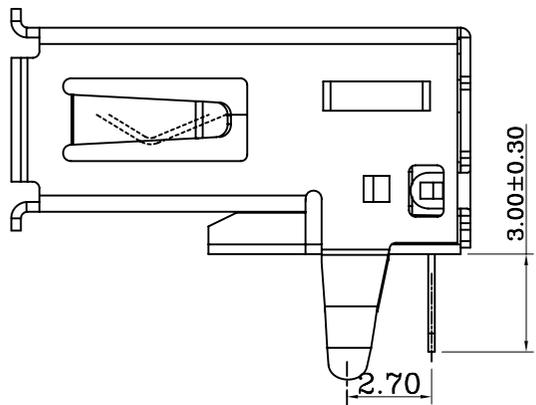


环保物料

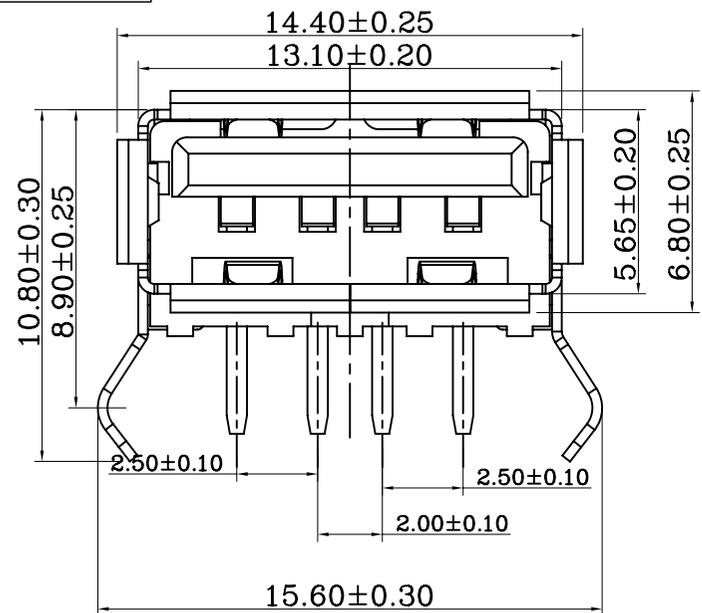

Recommended PCB Layout

Specification

Electrical Characteristics:

Contact Current Rating:1 Amperes.

Dielectric Withstanding Voltage:AC 500V R.M.S.

Insulation Resistance:500MΩ Min.

Contact Resistance:30mΩ Max.

Mechanical Characteristics:

Mating Force:3.57kg Max.



Unmating Force:0.7kg Min.

Material:

Housing:PBT

Contact:BRASS C2680 Plating Au1u;"3u;"5u;"  
10u;"15u;"30u"

Shell:SPCC/BRASS.Plating Ni over all

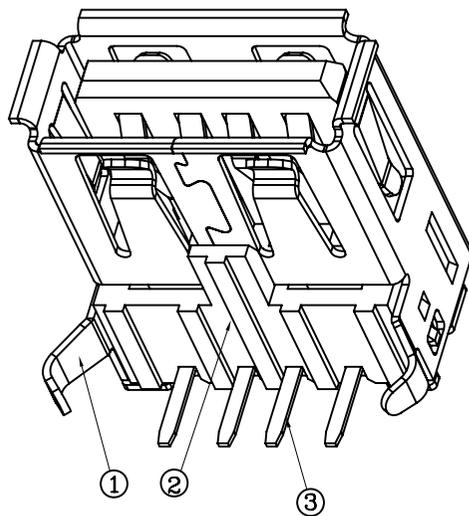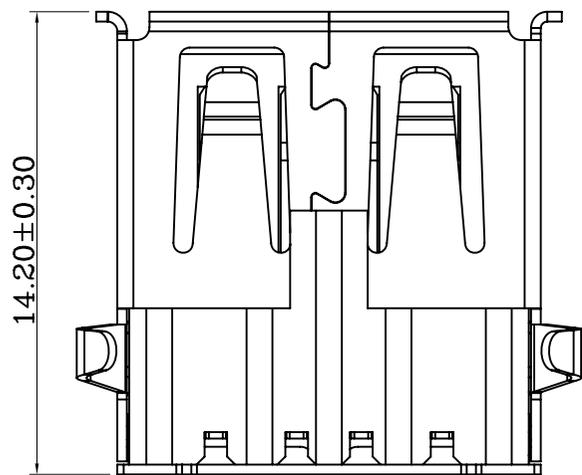

PIN Definition	
PIN NO.	Description
PIN 1	VBus
PIN 2	Data-
PIN 3	Data+
PIN 4	GND

A0	18.09.04	换图框发行	李兴泽		
版次REV	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	

一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽
X.X ±0.25	X' ±2'	校对 CHK.	
X.XX ±0.20	X.X' ±1'	审核 CHK.	
X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.	
单位 UNIT			
mm			

<b>JCTC</b> ® 胜蓝科技股份有限公司
TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司
品名 TITLE
USB AF 90度弯脚有卷边

料号 PART NO.		
W-USB2-AF90-009		
文件编号 NUMBER		
ENDPT01		
比例 SCALE	SHEET	版次 REV.
1/1	1/1	A0