

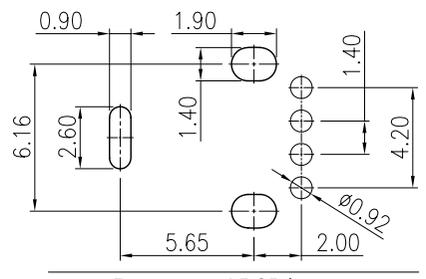
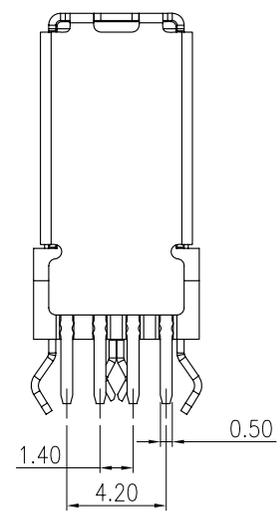
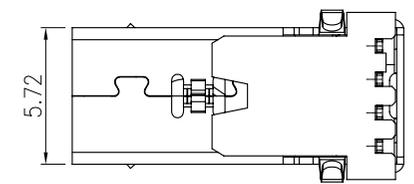
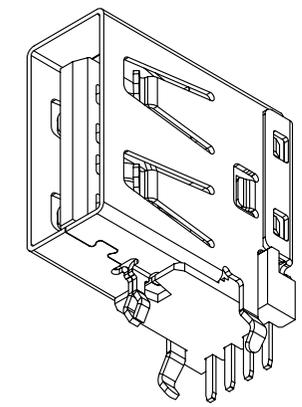
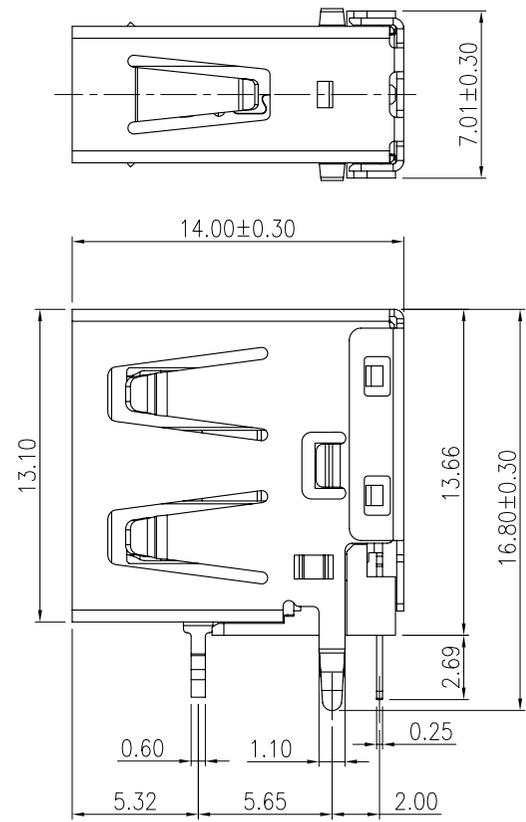


环保物料

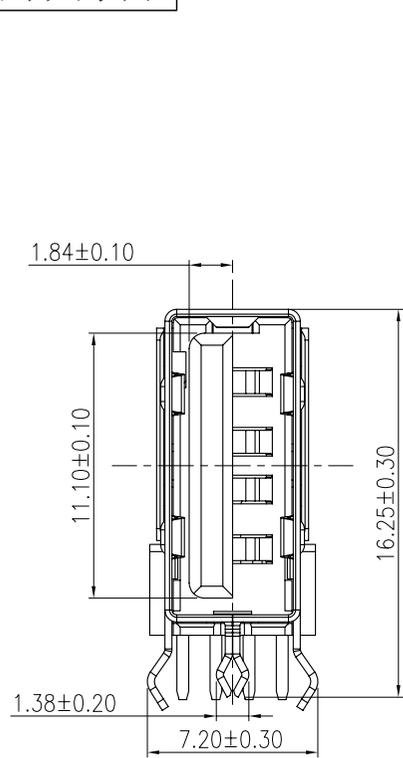

Recommend PCB layout

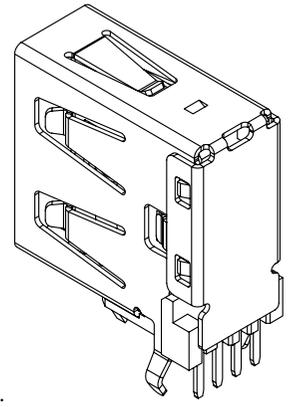

ELECTRICAL CHARACTERISTICS:  
 CONTACT CURRENT RATING : 1.5AMPERES.  
 DIELECTRIC WITHSTANDING VOLTAGE : AC 500V R. M. S.  
 INSULATION RESISTANCE : 1000 MEGOHMS MINIMUM AT DC 500V.  
 CONTACT RESISTANCE : 30 MILLIOHM MAXIMUM.  
 OPERATING TEMPERATURE : -40° TO +85° .

MECHANICAL CHARACTERISTICS:  
 CONTACT INSERTION FORCE :3.57KG MAXIMUM.  
 CONTACT SEPARATION FORCE :1.0KG MINIMUM.

MATERIALS:  
 HOUSING:PBT+30% G/F  
 CONTACT:BRASS C2680.  
 SHELL:SPCC/BRASS C2680;

CONTACTS:GOLD FLASHED 1U", 3U", 5U", 10U", 15U", 30U".  
 END OF NI-50U"MIN  
 SHELL: NICKEL PLATED OVER 30~100U" MIN.

			一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽		料号 PART NO. W-USB2-AF90-016	
			X.X ±0.30	X* ±2*	校对 CHK.			文件编号 NUMBER	
			X.XX ±0.20	X.X* ±1*	审核 CHK.			ENDPT01	
			X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.			比例 SCALE	
A0	18.08.16	换图框发行	李兴泽			品名 TITLE		SHEET	
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.		USB AF 侧插短体90度DIP"0"型脚无卷边		版次 REV.	
A	B	C	D	E	F	1/1		1/1 A0	

**JGTC** 胜蓝科技股份有限公司  
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司