
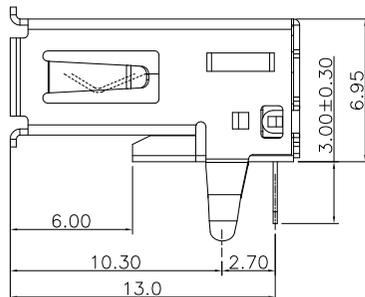


环保物料

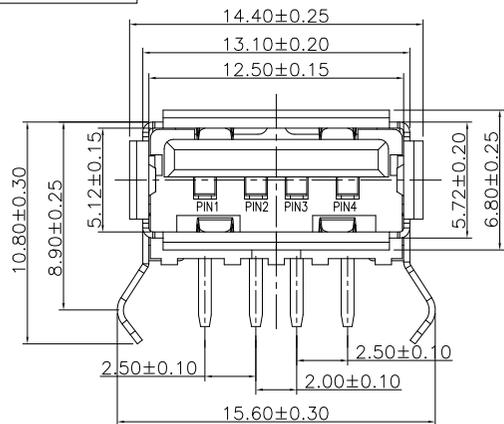

Specification

Electrical Characteristics:

Contact Current Rating:1 Amperes.

Dielectric Withstanding Voltage:AC 500V R.M.S.

Insulation Resistance:500MΩ Min.

Contact Resistance:30mΩ Max.

Mechanical Characteristics:

Mating Force:3.57kg Max.






Unmating Force:0.7kg Min.

Material:

Housing:LCP Natural

Contact:BRASS C2680 Plating Au1u”

Shell:SPCC/BRASS.Plating NI over all

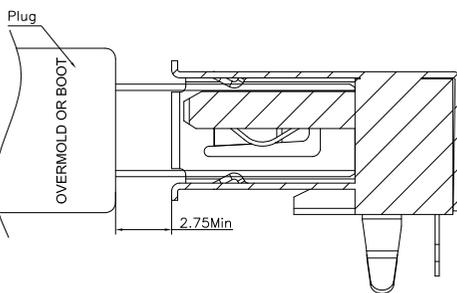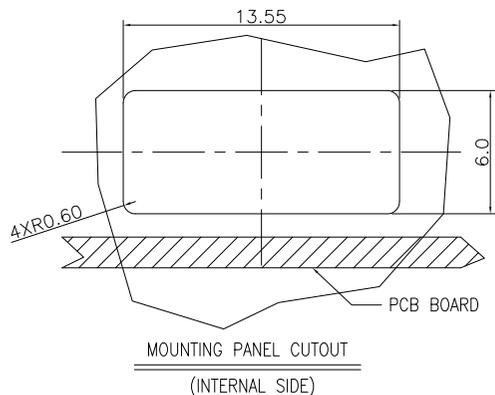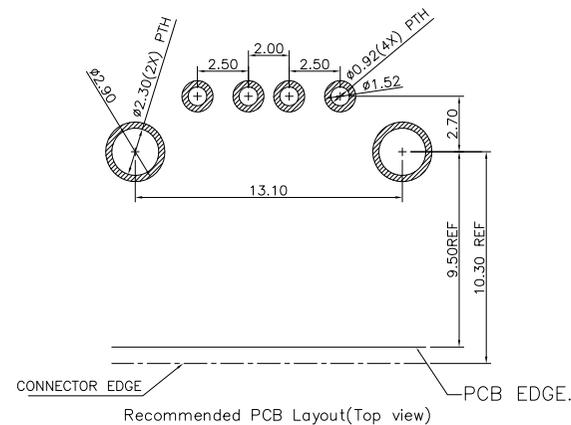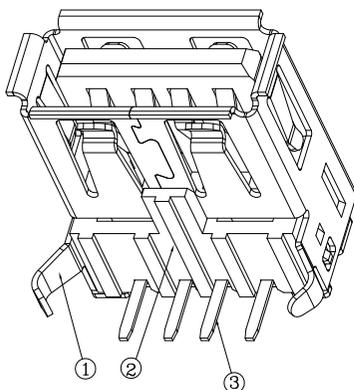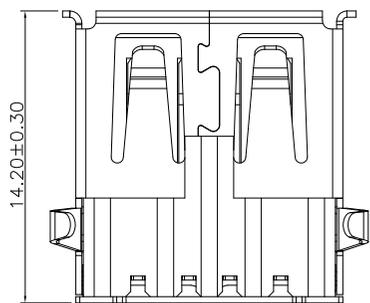

Mated Condition


PIN Definition	
PIN NO.	Description
PIN 1	VBus
PIN 2	Data-
PIN 3	Data+
PIN 4	GND

A2		22.06.06	新增尺寸发行	董东平	杨章雄	一般公差 GENERAL TOLERANCE X.X ±0.25 X' ±2" X.XX ±0.20 X.X' ±1" X.XXX ±0.10 ▲ MAJOR DIM.	绘图 DR. 李兴泽 校对 CHK. 董东平 审核 CHK. 董东平 核准 APPD. 杨章雄	料号 PART NO. W-USB2-AF90-L10	文件编号 NUMBER ENDPT01	<b>JCTC</b> <sup>®</sup> TERMINAL&CONNECTORS		
A1		21.08.04	更新图框发行	董东平	杨章雄							
A0		20.10.12	换图框发行	李兴泽	杨章雄	单位 UNIT mm	核 准 APPD. 杨章雄	品名 TITLE USB AF 90度弯脚有卷边		比例 SCALE 1/1	SHEET 1/1	版次 REV. A2
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.								


# 环保物料

包装方式如下图:


- 一.
- 1) 将成品一一放入包装盘内, 依同一方向放入 .
  - 2) 包装时, 如图所示 .
  - 3) 一个包装盘放置 100 PCS成品 .



- 二.
- 1) 将放满成品的包装盘依同一方向一层层叠好.
  - 2) 如图所示 , 每捆叠放10盘和5盘两种, 用PE膜缠紧.

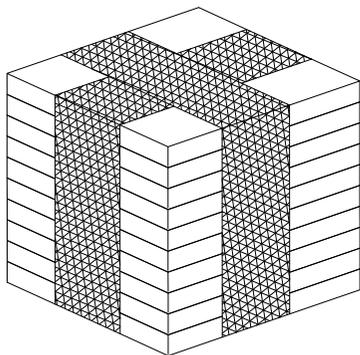

- 三.
- 1) 每箱分两排先各放置2捆10盘, 然后上面再各放置一捆5盘, 共计50盘5000PCS.
  - 2) 包装完成后用胶布封箱.
  - 3) 产品外箱贴产品标签.

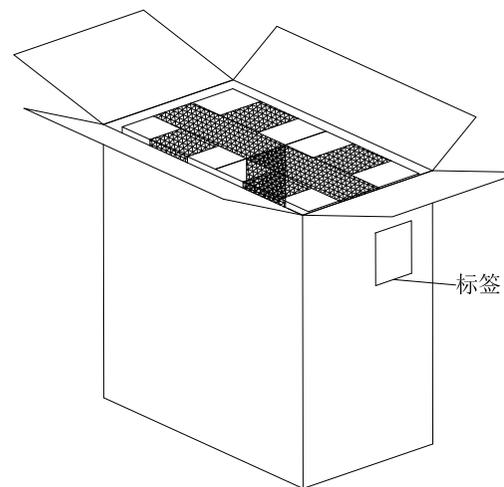

					一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO. W-USB2-AF90-L10		文件编号 NUMBER ENDPT01		 TERMINAL&CONNECTORS	
					X.X ±0.25	X° ±2°	校对 CHK.		品名 TITLE USB AF 90度弯脚有卷边		比例 SCALE 1/1			
					X.XX ±0.20	X.X° ±1°	审核 CHK.				核准 APPD.		版次 REV. A1	
					X.XXX ±0.10	▲MAJOR DIM.	单位 UNIT							
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	mm	