


环保物料

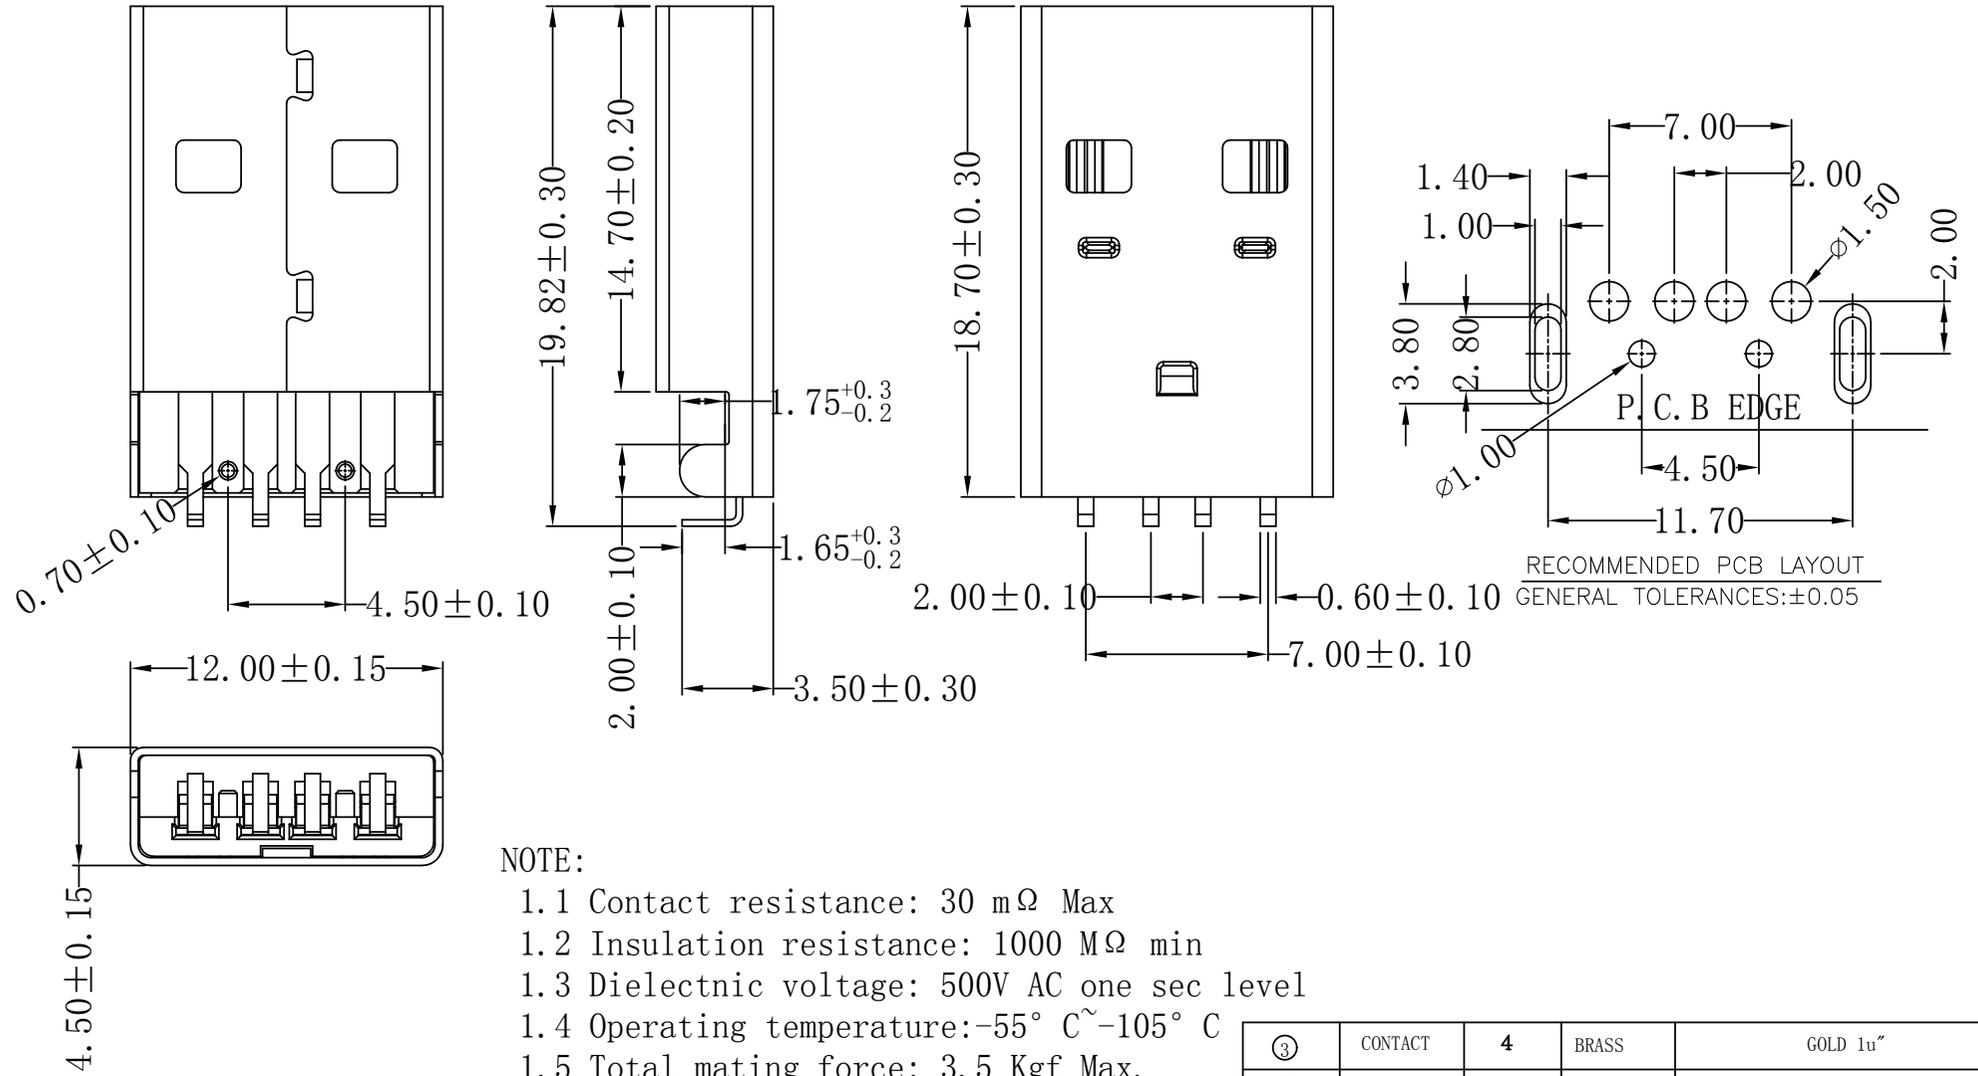

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCES: ±0.05

NOTE:


- 1.1 Contact resistance: 30 mΩ Max
- 1.2 Insulation resistance: 1000 MΩ min
- 1.3 Dielectnic voltage: 500V AC one sec level
- 1.4 Operating temperature: -55° C ~ -105° C
- 1.5 Total mating force: 3.5 Kgf Max.
- 1.6 Total unmating force: 1.0 Kgf Min.

③	CONTACT	4	BRASS	GOLD 1u"
②	HOUSING	1	LCP	Black
①	SHELL	1	SPCC	NICKE PLATING
ITEM	PART NAME	Q' TY/PCS	MATETIALS	NOTE

					一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER		 TERMINAL&CONNECTORS			
A5	21.07.08	更新图框发行	董东平	杨章雄	X.X ±0.30	X' ±2'	校	对	W-USB2-AM90-023		ENDPT01					
A1	18.11.20	新增尺寸	李兴泽	杨章雄	X.XX ±0.20	X.X' ±1'	校	核	品名 TITLE		比例 SCALE		SHEET		版次 REV.	
A0	18.10.23	换图框发行	李兴泽	杨章雄	X.XXX ±0.10	▲ MAJOR DIM.	核	准								
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm			核准 APPD.							

环保物料


PE

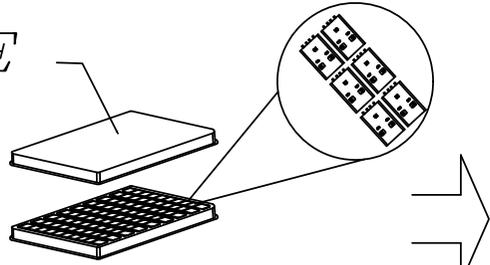


① PE真空盒(1Set).




② 100Pcs/盒.

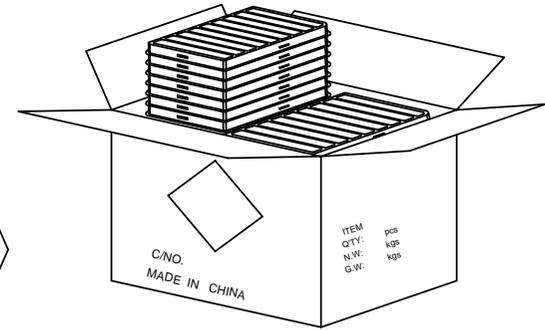


③ 50盒/箱.

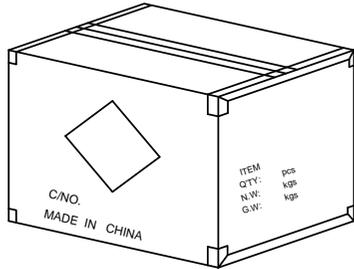

④ 粘贴产品标签.

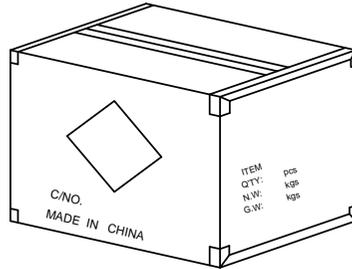

⑤ 外箱用透明胶纸带封“工”字型.

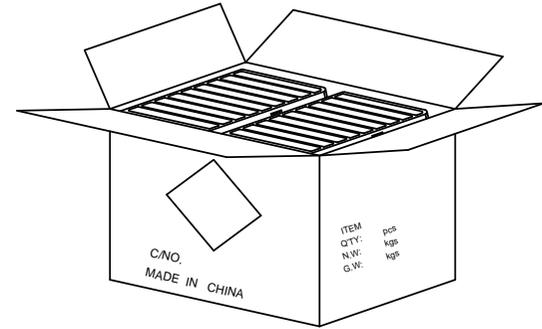

⑥ 每箱平放25盒*2,若尾数箱在空间处加装填充物.

备注:

1. PE真空盒 (1Set)
2. 每盒装成品100Pcs;
3. 每箱装50盒 (5000Pcs);
4. 外箱用透明胶纸带封“工”字型;
5. 外箱粘贴好产品标签.

					一般公差 GENERAL TOLERANCE		绘图 DR.	料号 PART NO.		文件编号 NUMBER		 TERMINAL&CONNECTORS	
					X.X ±0.30	X° ±2°	校对 CHK.	W-USB2-AM90-023		ENDPT01			
A1	21.07.08	更新图框发行	董东平	杨章雄	X.XX ±0.20	X.X° ±1°	审核 CHK.	品名 TITLE		比例 SCALE		SHEET	版次 REV.
A0	18.09.04	换图框发行	李兴泽	杨章雄	X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.	USB AM 90度DIP沉板式 包装图		1/1		1/1	A1
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm	