
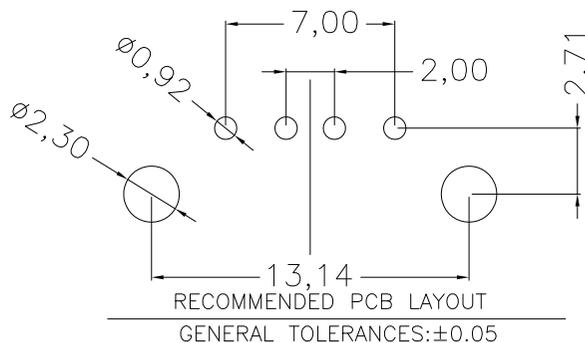


环保物料


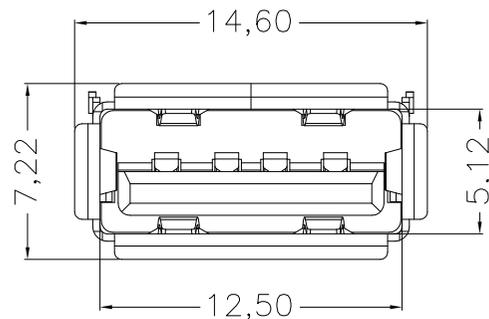


NOTES:

- MATERIAL AND PLATING:  
Housing: SEE,UL94V-0  
Contact: C2680,See Tab"6" Au And 100u"Sn Plated.  
Shell: SPCC,Ni 50u"Overall Plated;  
Tin Foot Sn 80u" Plated;
- MECHANICAL CHARACTERISTIC  
Mating Force: 35N(3.57Kgf) Max.  
Unmating Force: 10N(1.02Kgf) Min.  
Durability: 1,500 Cycles.
- ELECTRICAL CHARACTERISTIC  
Current Rating: 1.5A  
Voltage Rating: 30V AC Max.  
Contact Resistance: 30m Ohm Max.  
Insulation Resistance: 1000M Ohm Min.  
Dielectric Withstanding Voltage: 500V AC.
- TEMPERATURE  
Openrating Temperature: -40°C~+85°C  
Storage Temperature: -60°C~+105°C
- WAVE SOLDERING CAPABLE TO 260°C+5°C/-0°C(3~5S).

W-USB2-CH  $\frac{xx}{a} \frac{x-xx}{b \ c}$

- a:PLATING TYPE  
00=GOLD G/F  
03=GOLD 3u"  
15=GOLD 15u"  
30=GOLD 30u"
- b:MATERIAL  
1=PBT  
3=LCP(ROHS)  
4=LCP(ROHS2.0+HF)  
5=NY9T(ROHS)
- c:COLOR  
21=BLACK  
22=WHITE

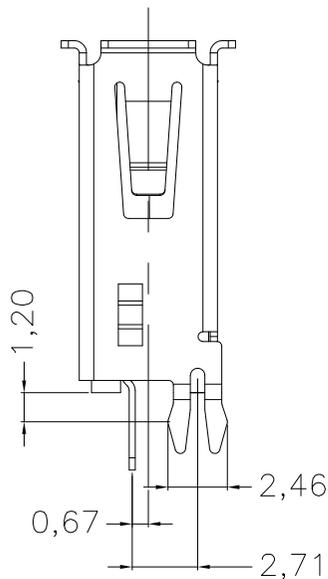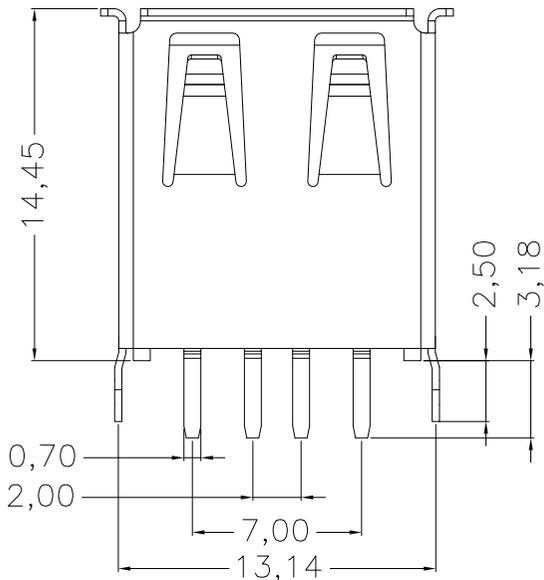


|         |         |                  |         |          |                        |              |          |  |                    |          |             |     |  |            |  |
|---------|---------|------------------|---------|----------|------------------------|--------------|----------|--|--------------------|----------|-------------|-----|--|------------|--|
|         |         |                  |         |          | 一般公差 GENERAL TOLERANCE |              | 绘图 DR.   |  | 料号 PART NO.        |          | 文件编号 NUMBER |     | <br>TERMINAL&CONNECTORS |            |  |
|         |         |                  |         |          | X.X ±0.30              | X' ±2'       | 校对 CHK.  |  | W-USB2-CHxxx-xx    |          | ENDPT01     |     |  |            |  |
|         |         |                  |         |          | X.XX ±0.20             | X.X' ±1'     | 审核 CHK.  |  | 品名 TITLE           |          | 比例 SCALE    |     | SHEET  |            |  |
|         |         |                  |         |          | X.XXX ±0.10            | ▲ MAJOR DIM. | 核准 APPD. |  | USB 2.0 A TYPE DIP |          | 1/1         |     | 1/1  |            |  |
| 版次 REV. | 日期 DATE | 变更内容 DESCRIPTION | 审核 CHK. | 核准 APPD. | 单位 UNIT                | mm           |          |  |                    | 核准 APPD. |             | 1/1 |  | 版次 REV. A1 |  |

环保物料

18盘/箱


18盘/箱

120PCS/盘

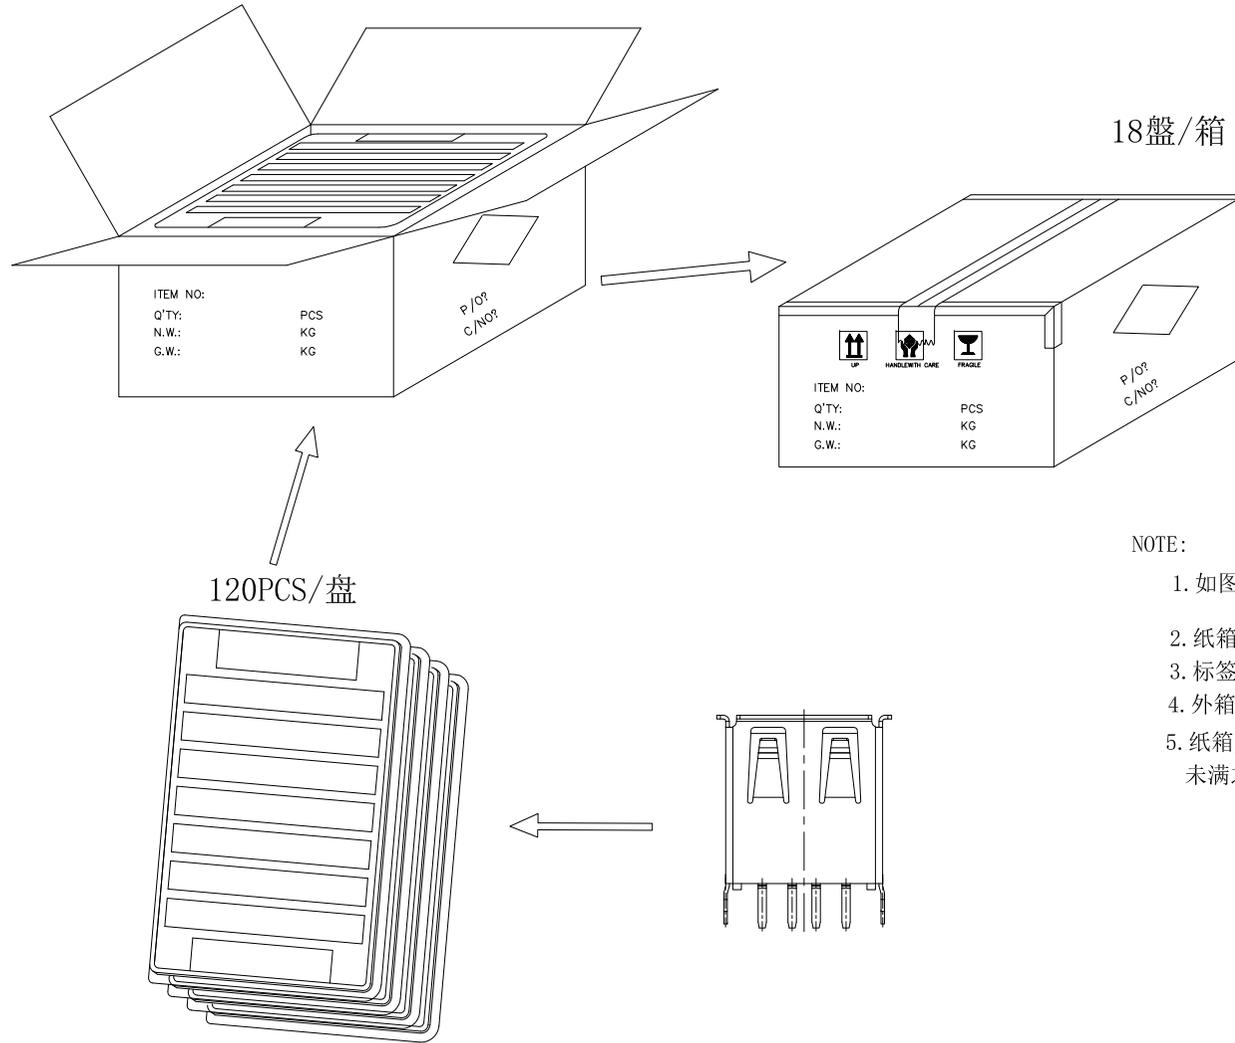

NOTE:

1. 如图所示, 将成品按规定之包装数量置入真空盒中.
2. 纸箱封盖后以封箱胶封箱, 并于侧面贴上出货标签.
3. 标签; 若客户另有贴标签要求, 则按其订单注明之要求贴;
4. 外箱以封箱带绑固; (箱内需放干燥剂)
5. 纸箱尺寸及印刷见包材图面.  
未满足之零数箱, 需以缓冲材料填满.

|         |         |                  |         |          |         |                        |  |          |                 |  |                    |           |  |
|---------|---------|------------------|---------|----------|---------|------------------------|--|----------|-----------------|--|--------------------|-----------|--|
| A2      |         | 21. 07. 08       | 更新图框发行  | 董东平      | 杨章雄     | 一般公差 GENERAL TOLERANCE |  | 绘图 DR.   | 料号 PART NO.     |  | 文件编号 NUMBER        |           | <br>TERMINAL&CONNECTORS |
| A1      |         | 20. 01. 03       | 更新包装数量  | 董东平      | 杨章雄     | X.X ±0.30              | X' ±2'   | 校对 CHK.  | W-USB2-CHxxx-xx |  | ENDPT01            |           |  |
| A0      |         | 17. 04. 28       | 新图面发行   | 李兴泽      | 杨章雄     | X.XX ±0.20             | X.X' ±1'   | 审核 CHK.  | 品名 TITLE        |  | USB 2.0 A TYPE DIP |           | 比例 SCALE   |
| 版次 REV. | 日期 DATE | 变更内容 DESCRIPTION | 审核 CHK. | 核准 APPD. | 单位 UNIT | mm                     |  | 核准 APPD. |                 |  | 1/1                | SHEET 1/1 | 版次 REV. A2   |